


SPECIFICATION

Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC/Mimute
 Operation Temperature:-40°C~+105°C
 Housing:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

2.54X(No. Of Contacts-1)

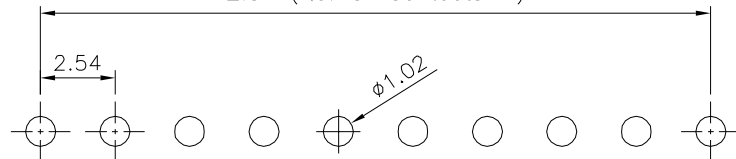

Recommended P.C.B. Layout

2.54XNo. Of Contacts±0.40

2.50±0.15


Pin 1




2.54X(No. Of Contacts-1)±0.20

2.54±0.10

2.54±0.15

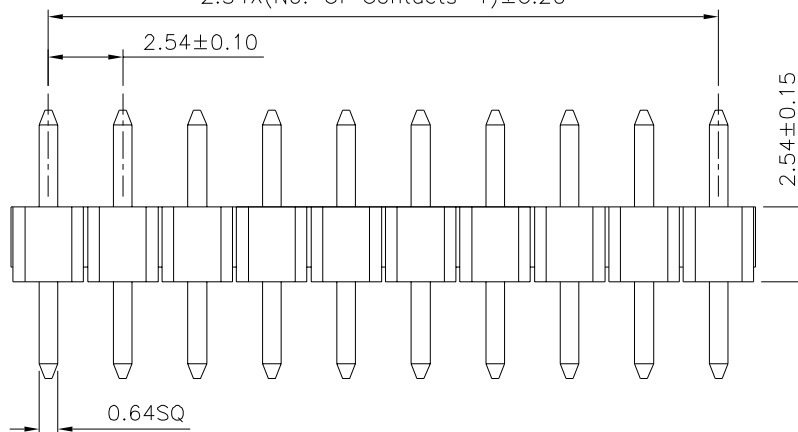

0.64SQ

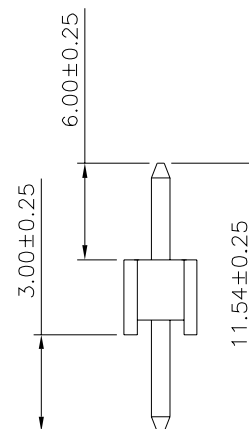

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16175

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 XXX ±0.05


SCALE

NONE

REV.

BO

UNIT
mm



NO. REV.

BO NEW RELEASE

REVISIONS

CHK

DATE

BO

NEW RELEASE

REVISIONS

CHK

DATE