
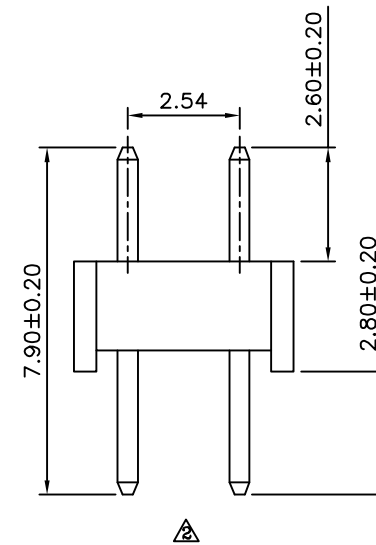
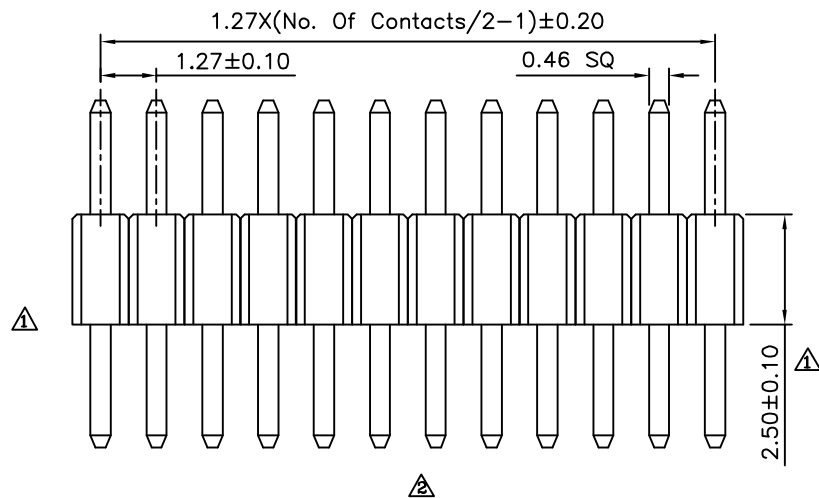


Recommended P.C.B. Layout

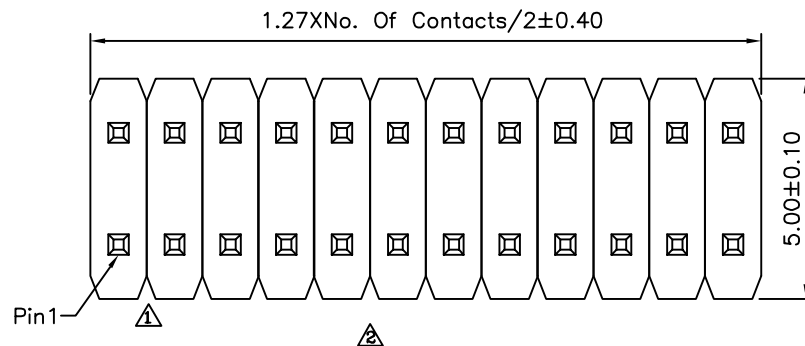

△ SPECIFICATION
△ Current Rating:1A
Withstand Voltage:1000V AC For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature Range:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash
No. Of Contacts:04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16208

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


WSS

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A2 Modify Data HZF 06/28/2011

△ A1 Modify Data HZF 09/25/2008

△ A0 NEW RELEASE