
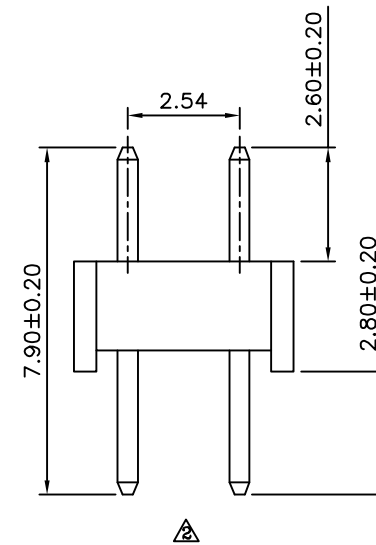
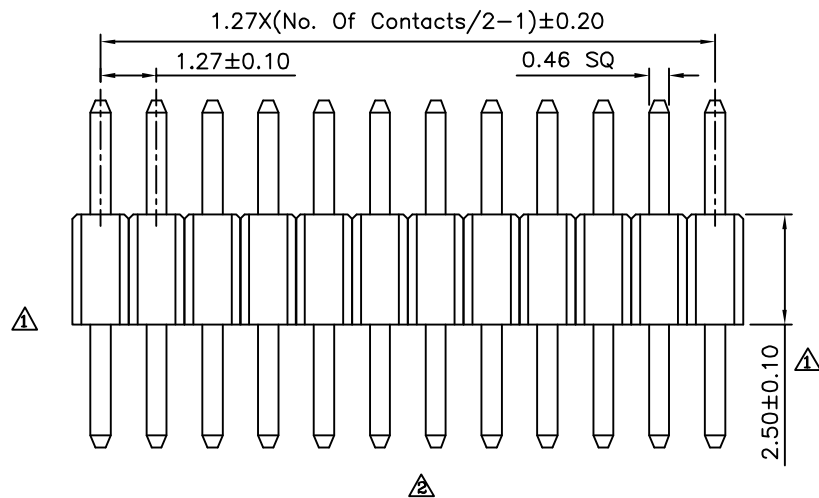


Recommended P.C.B. Layout

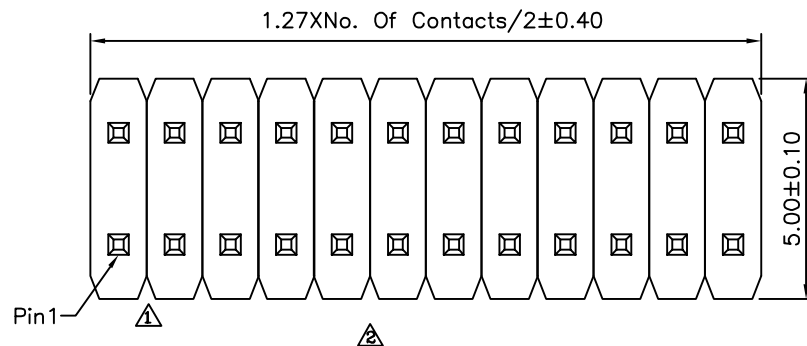

SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16212

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm

UNIT

mm

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	06/28/2011
A1		Modify Data	HZF	09/25/2008
A0		NEW RELEASE		