
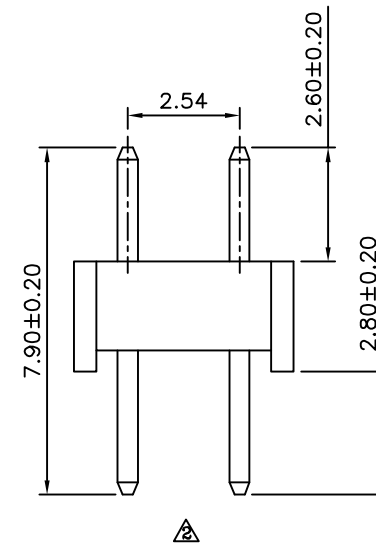
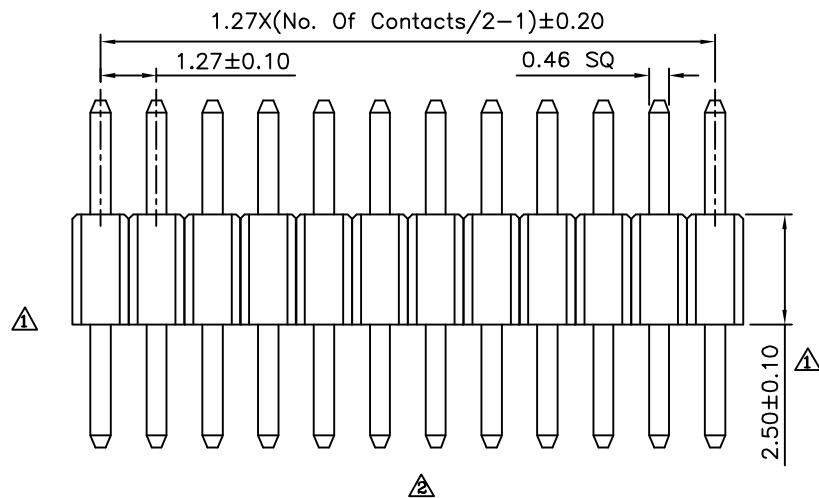


Recommended P.C.B. Layout

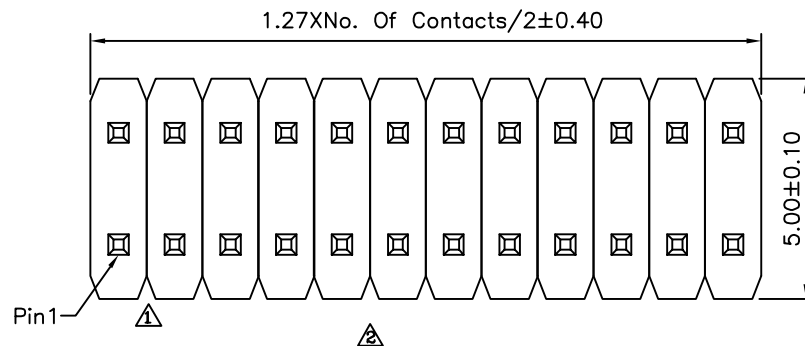

**SPECIFICATION**  
 Current Rating:1A  
 Withstand Voltage:1000V AC For 1 Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature Range:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Copper Alloys,Gold Flash  
 No. Of Contacts:04~100 Contacts  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

16215

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A2  |      | Modify Data | HZF | 06/28/2011 |
| A1  |      | Modify Data | HZF | 09/25/2008 |
| A0  |      | NEW RELEASE |     |            |