

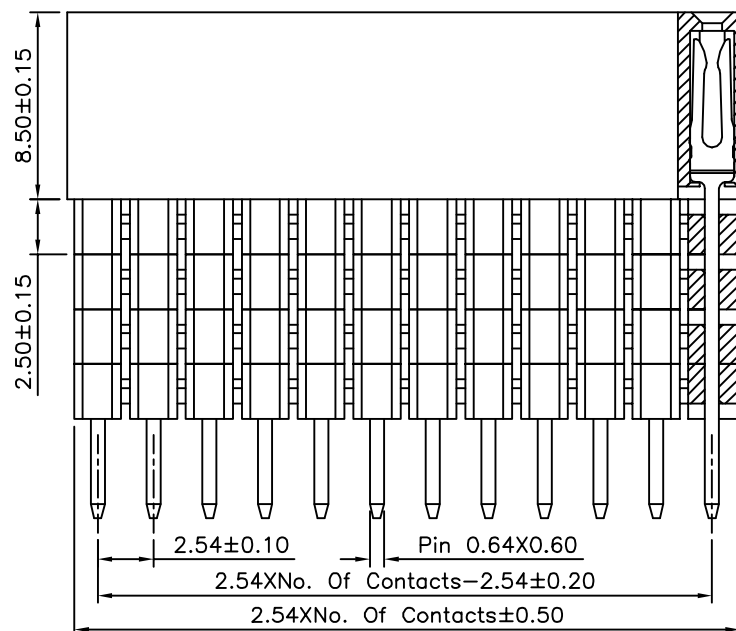
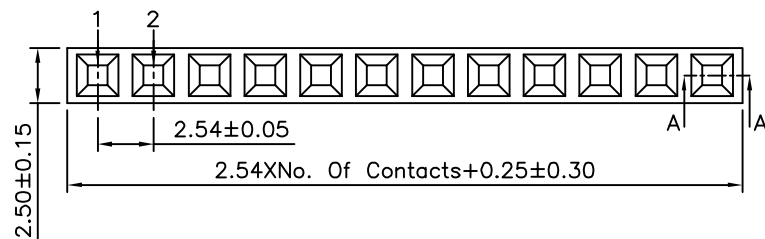


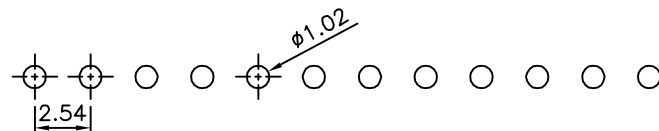

Section A-A

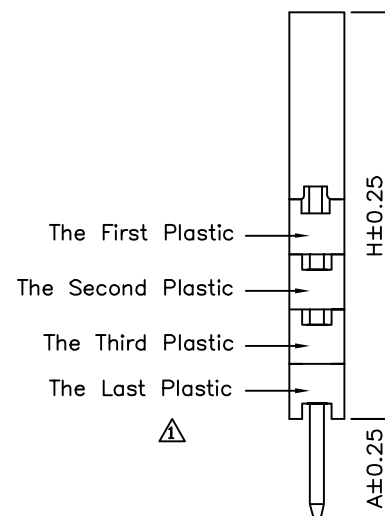

The First Plastic

The Second Plastic

The Third Plastic

The Last Plastic

SPECIFICATION

Current Rating: 3.0 Amp

Withstand Voltage: 1000V AC/DC

Contact Resistance: 20 Milliohms Max.

Insulation Resistance: 1000 Megaohms Min.

Operation Temperature: -40°C ~ +105°C

Contact: Brass, Gold Plated Over Nickel

Insulator: PBT + 30% G.F. (UL94V-0), Black

RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.67	4.60

DRAWING No.

16349

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

.X ± 0.40


.XX ± 0.25

.XXX ± 0.15

ANG. $\pm 3^\circ$

UNIT

mm



SCALE

NONE

REV.

B1

NO. REV.

REVISIONS

CHK

DATE

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.