

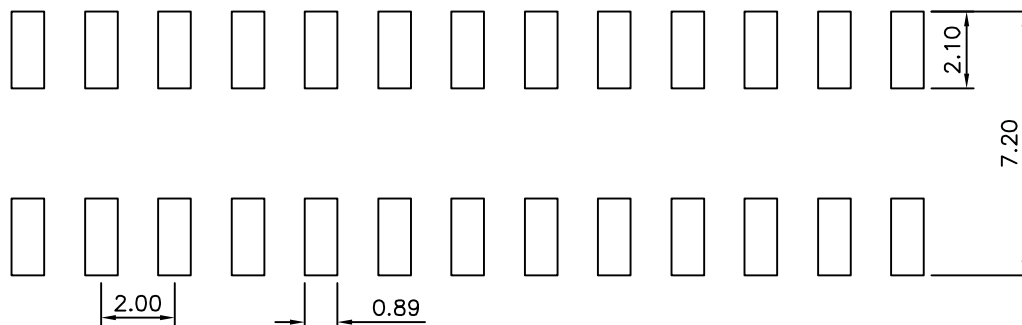



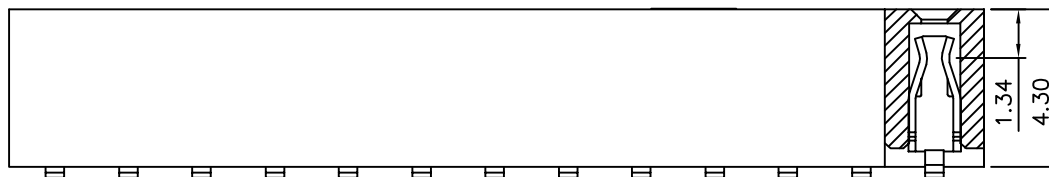

Recommended P.C.B. Layout

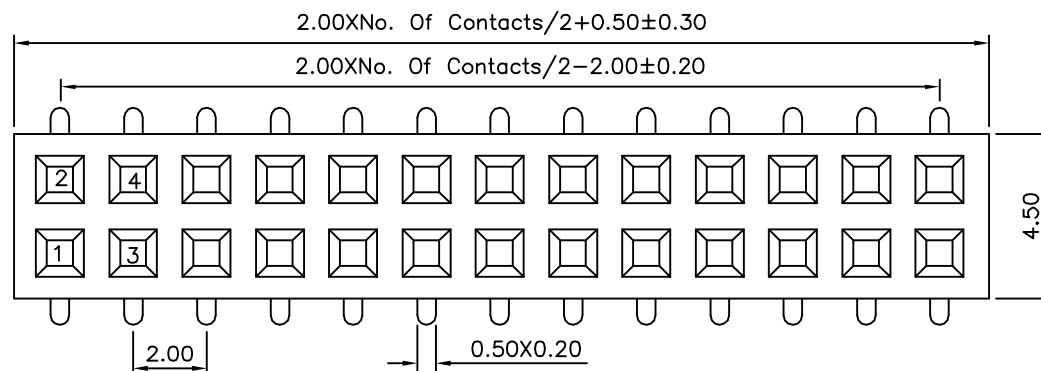

SPECIFICATION

Current Rating:1.5 Amps/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Temperature:-55°C~+105°C
Housing:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant