

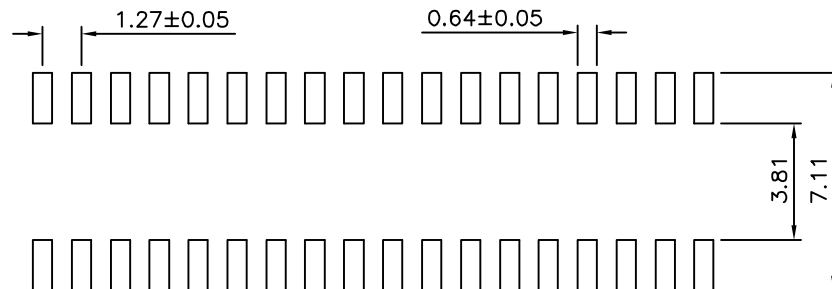


SPECIFICATION

Current Rating:1.0A/Contact Max.
Withstand Voltage:300V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Housing:PA6T+30%G.F.(UL94V-O),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant



Recommended P.C.B. Layout

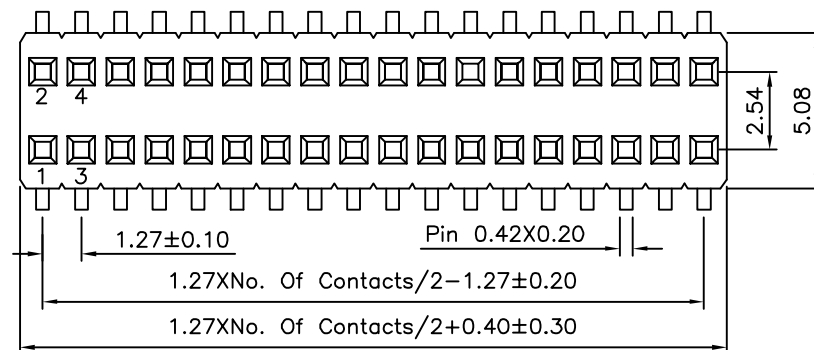

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

16713

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50
X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±5°

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

10/09/2013