

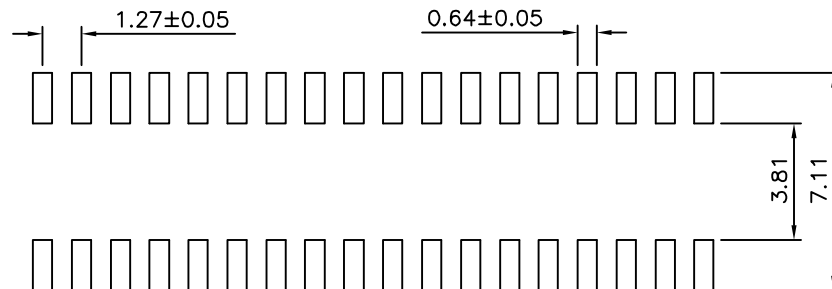


SPECIFICATION

Current Rating:1.0A/Contact Max.
 Withstand Voltage:300V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-O),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant



Recommended P.C.B. Layout

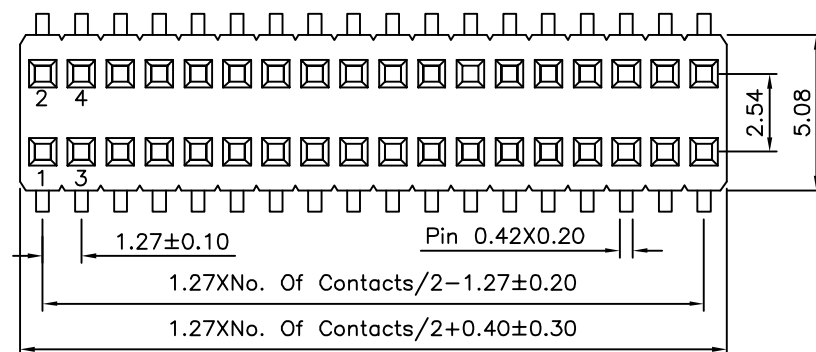

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16717

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN


REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

10/09/2013