

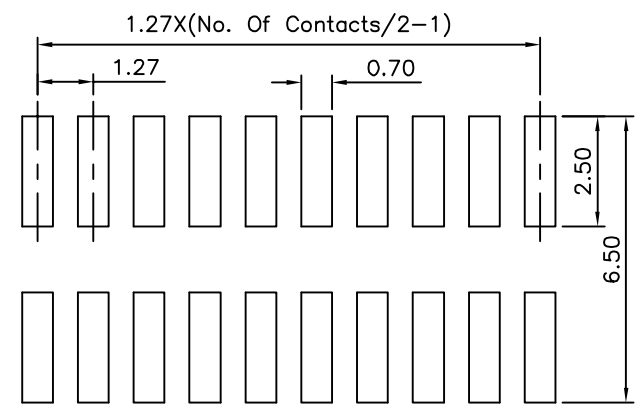



SPECIFICATION

Current Rating:1A
 Dielectric Strength:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

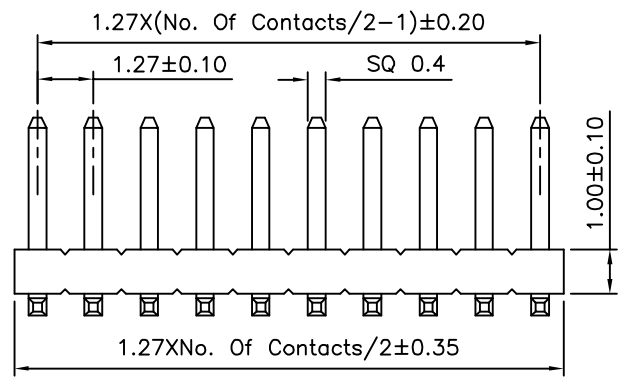

Recommended P.C.B. Layout

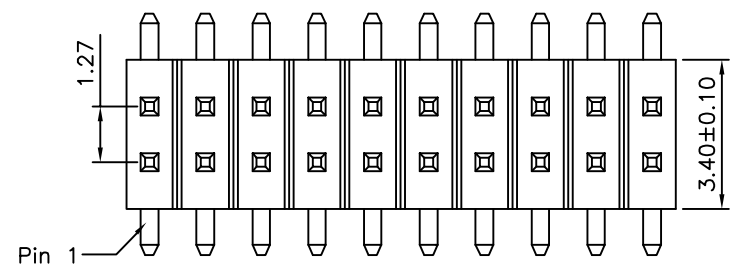

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°							
16789		MEI									
		CHECKED BY									
		HZF									
		DRAWING BY									
		GAO									
SCALE	NONE	REV.	CO	UNIT	mm	NO.	REV.	CO	NEW RELEASE	HZF	04/17/2013
									REVISIONS	CHK	DATE