


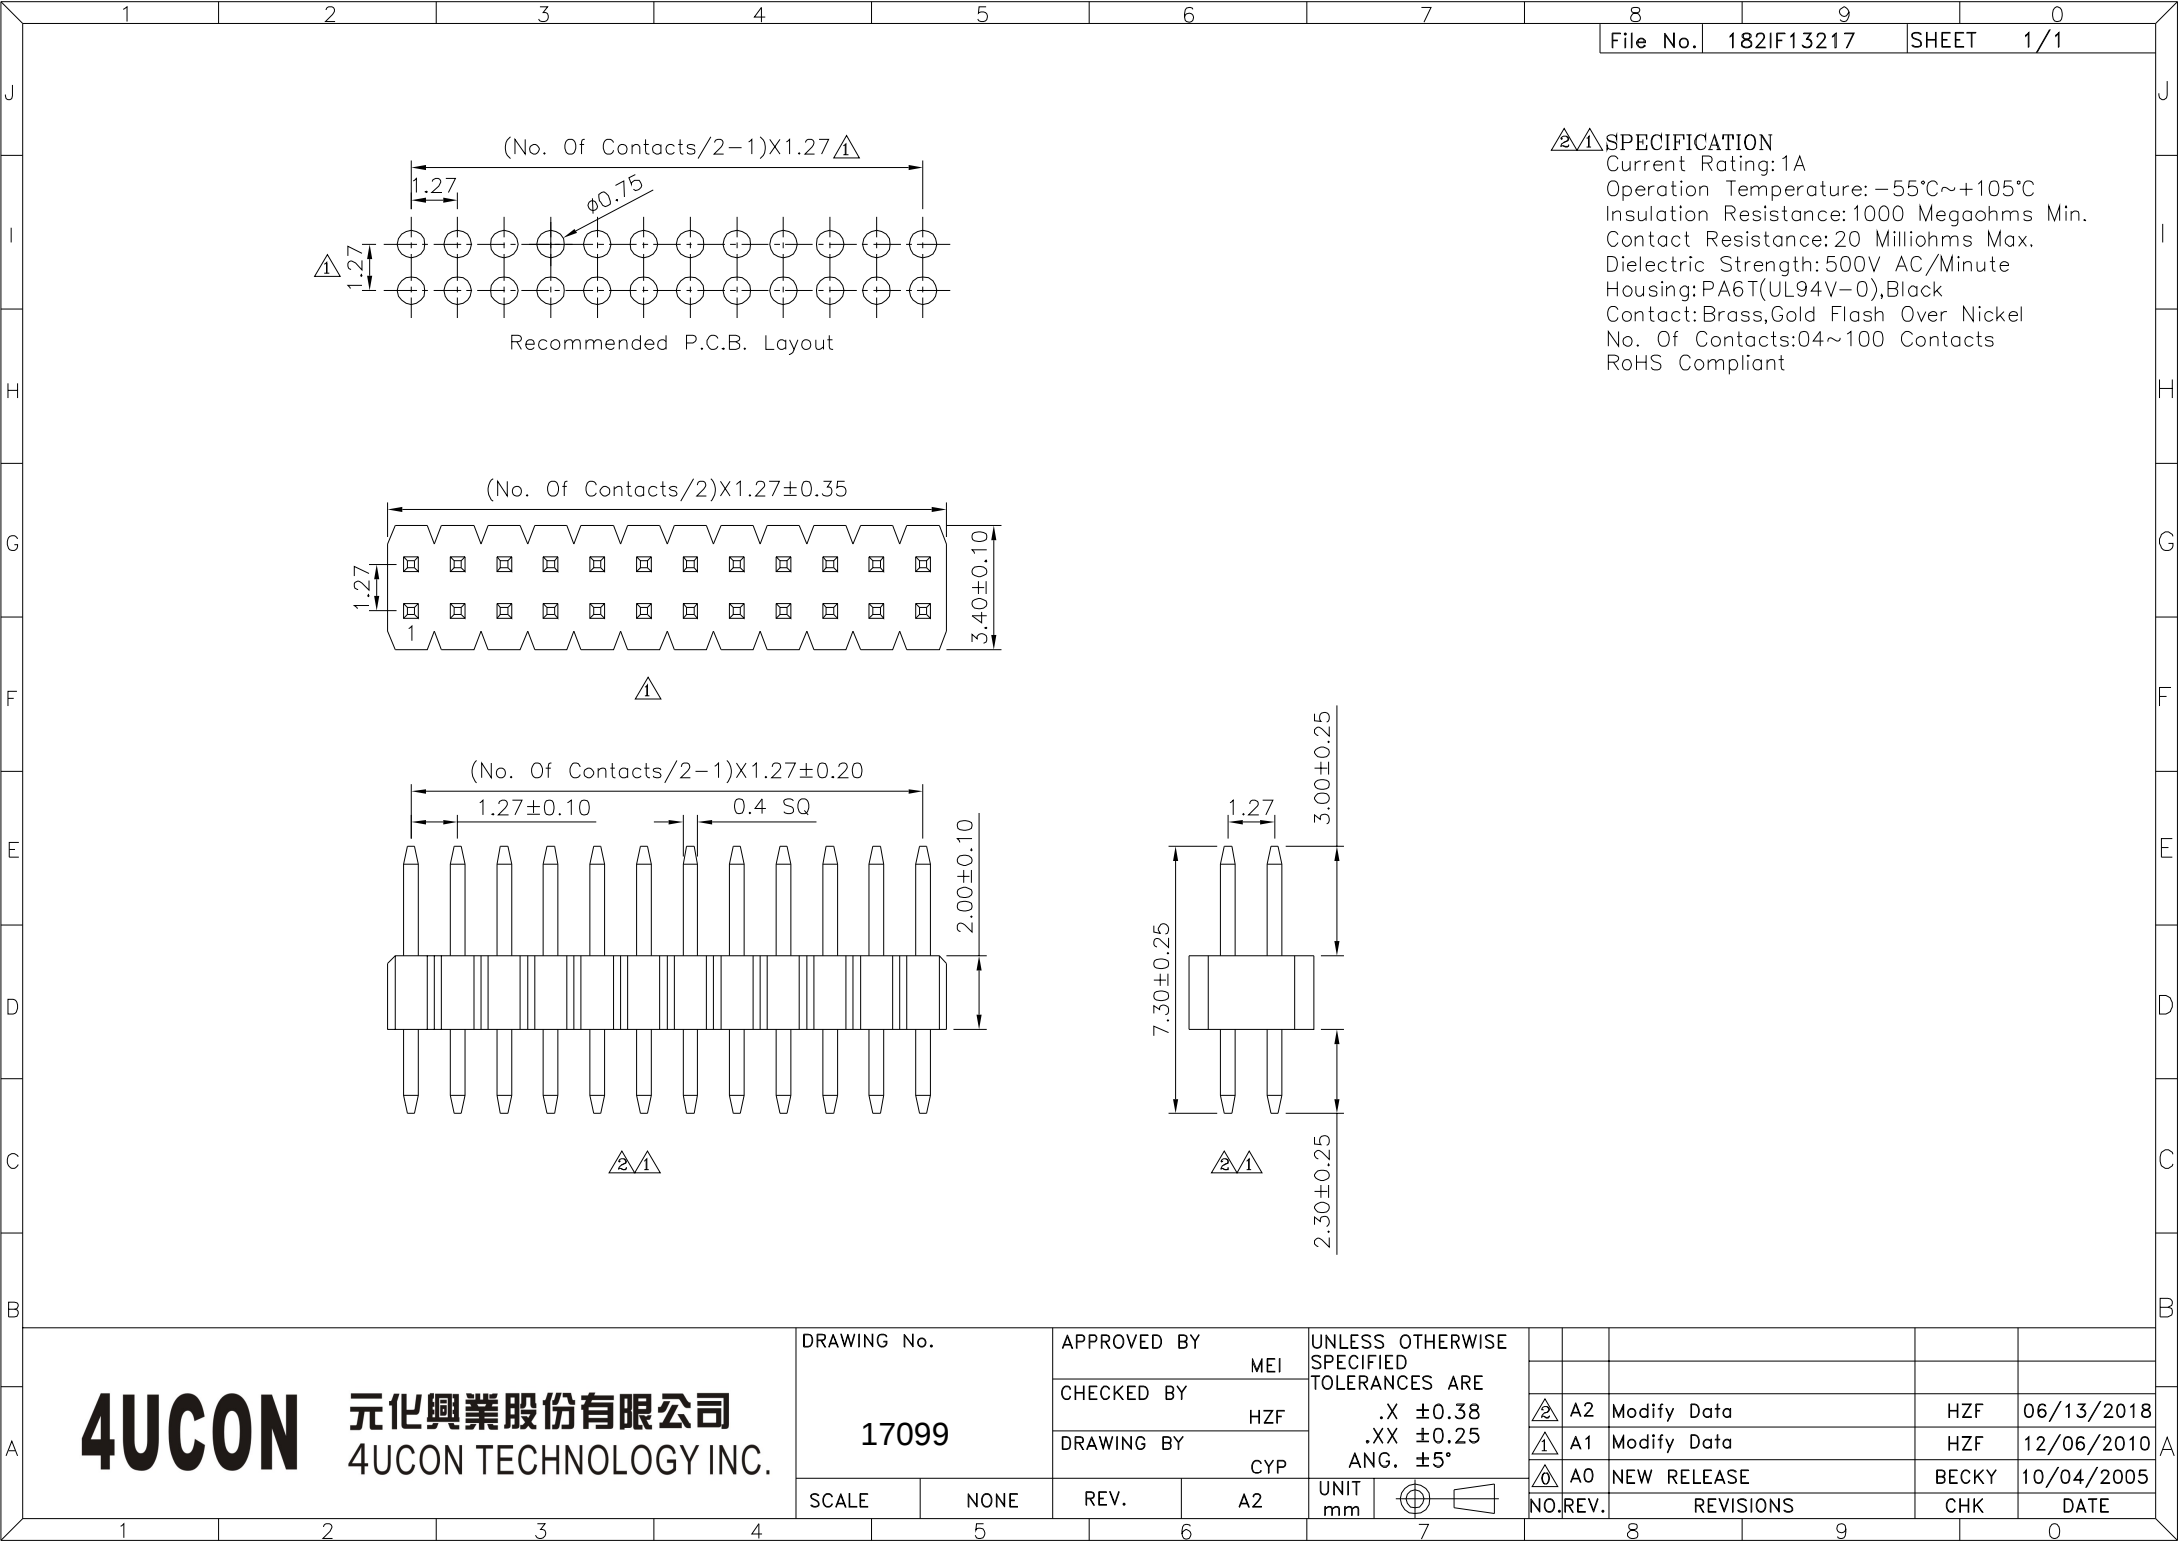

SPECIFICATION
Current Rating: 1A
Operation Temperature: -55°C~+105°C
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Strength: 500V AC/Minute
Housing: PA6T(UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
No. Of Contacts: 04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 17099		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY		CYP						
SCALE	NONE	REV.	A2	UNIT mm		NO. REV.	REVISIONS	CHK	DATE	
						A2	Modify Data	HZF	06/13/2018	
						A1	Modify Data	HZF	12/06/2010	
						A0	NEW RELEASE	BECKY	10/04/2005	