


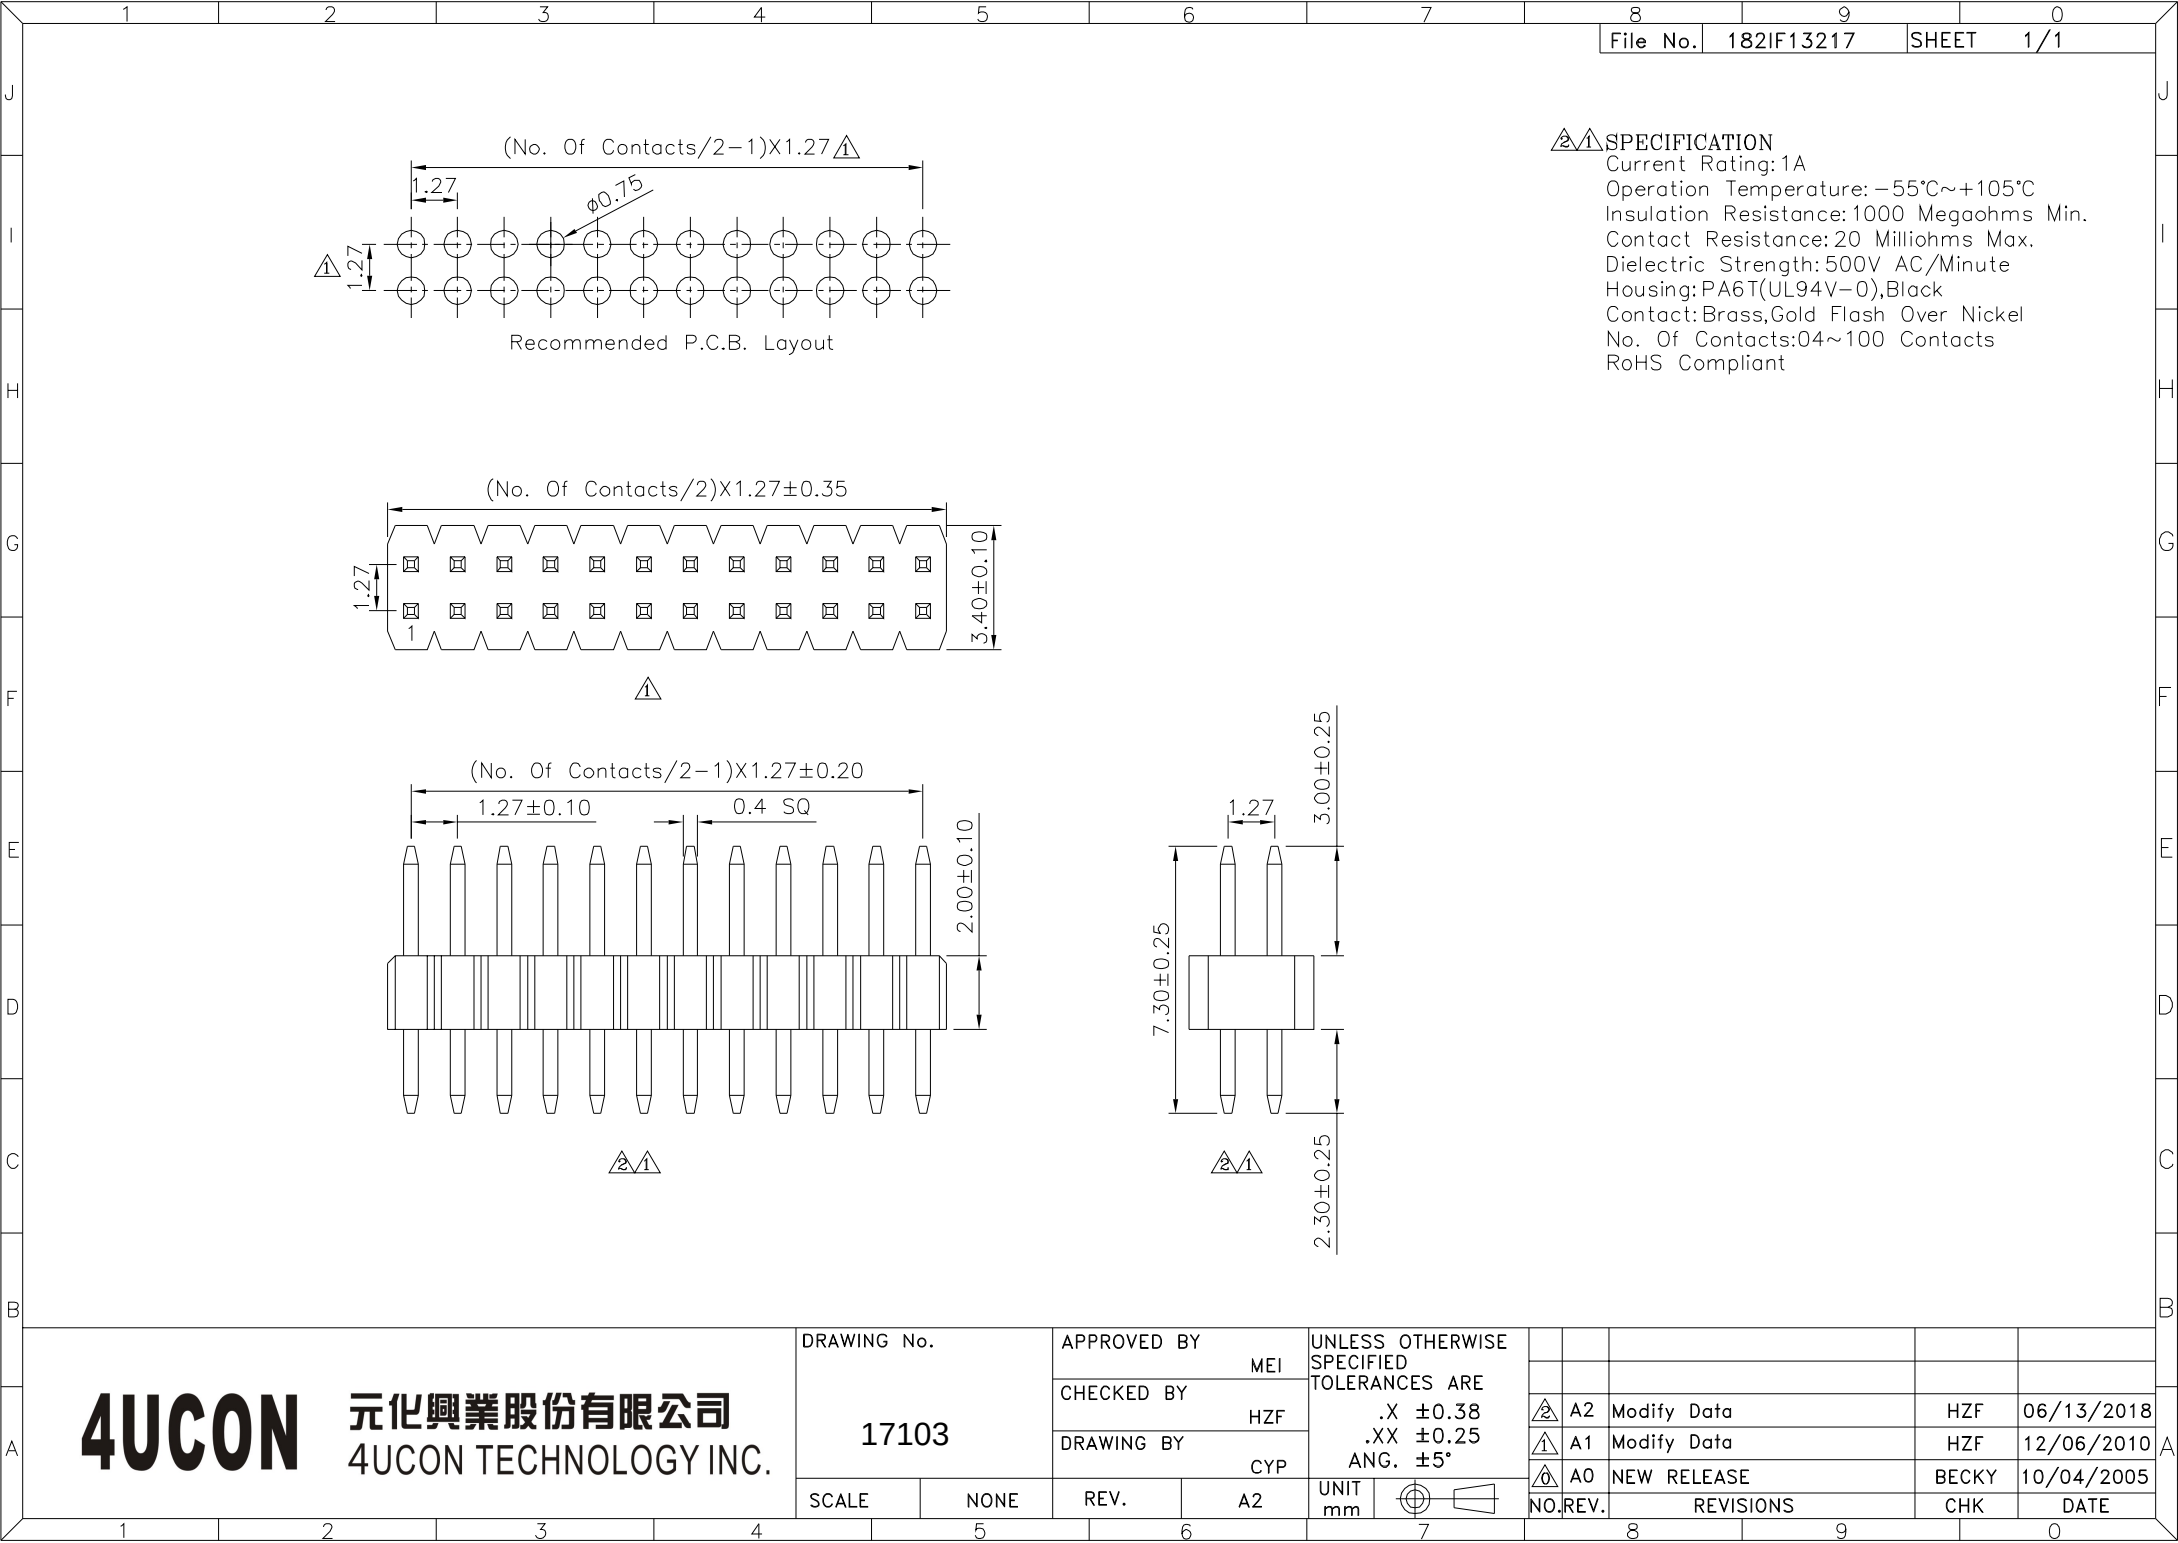


**SPECIFICATION**  
Current Rating: 1A  
Operation Temperature: -55°C~+105°C  
Insulation Resistance: 1000 Megaohms Min.  
Contact Resistance: 20 Milliohms Max.  
Dielectric Strength: 500V AC/Minute  
Housing: PA6T(UL94V-0), Black  
Contact: Brass, Gold Flash Over Nickel  
No. Of Contacts: 04~100 Contacts  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |      |             |    |
|-------------|------|-------------|----|
| DRAWING No. |      | APPROVED BY |    |
|             |      | MEI         |    |
|             |      | CHECKED BY  |    |
| 17103       |      | HZF         |    |
|             |      | DRAWING BY  |    |
|             |      | CYP         |    |
| SCALE       | NONE | REV.        | A2 |

|                                           |  |      |       |
|-------------------------------------------|--|------|-------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |  | .X   | ±0.38 |
|                                           |  | .XX  | ±0.25 |
|                                           |  | ANG. | ±5°   |
|                                           |  | UNIT | mm    |



|     |      |             |       |            |
|-----|------|-------------|-------|------------|
| NO. | REV. | REVISIONS   | CHK   | DATE       |
| 2   | A2   | Modify Data | HZF   | 06/13/2018 |
| 1   | A1   | Modify Data | HZF   | 12/06/2010 |
| 0   | A0   | NEW RELEASE | BECKY | 10/04/2005 |