
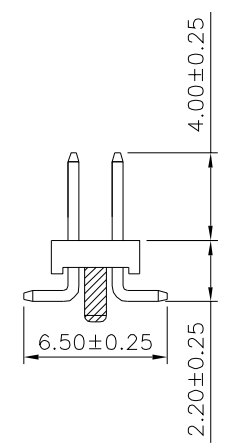


**SPECIFICATION**  
 Current Rating:2A  
 Dielectric Strength:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 ⚠ Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:06~80 Contacts  
 RoHS Compliant

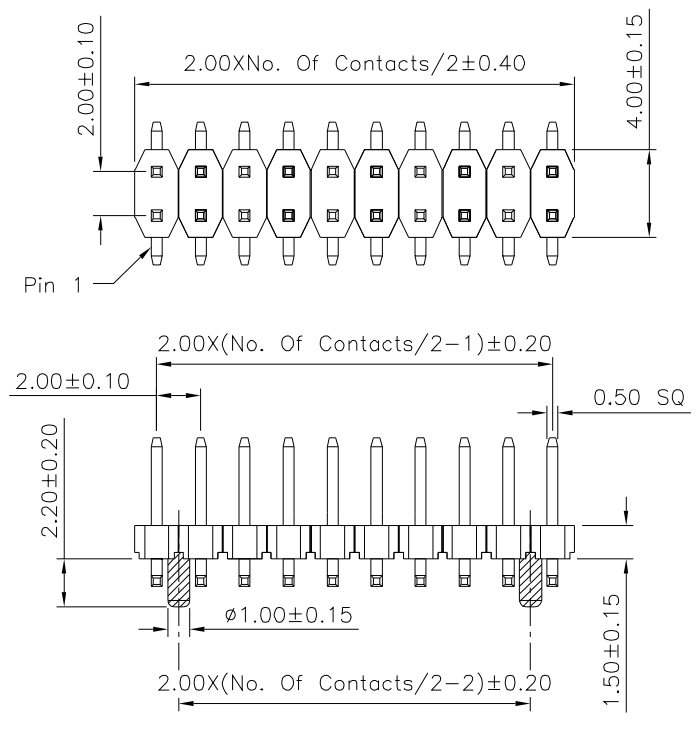

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |             |      |  |
|-------------|------|-------------|------|--|
| DRAWING No. |      | APPROVED BY |      | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>.X ±0.38<br>.XX ±0.25<br>.XXX ±0.05 |
| 17137       |      | MEI         |      |  |
|             |      | CHECKED BY  | HZF  |  |
| SCALE       |      | DRAWING BY  | GAO  |  |
| NONE        | REV. | B1          | UNIT | mm   |

|     |      |             |     |            |
|-----|------|-------------|-----|------------|
| NO. | REV. | REVISIONS   | CHK | DATE       |
| ⚠   | B1   | Modify Data | HZF | 11/27/2025 |
| ⚠   | B0   | NEW RELEASE | HZF | 06/02/2022 |