

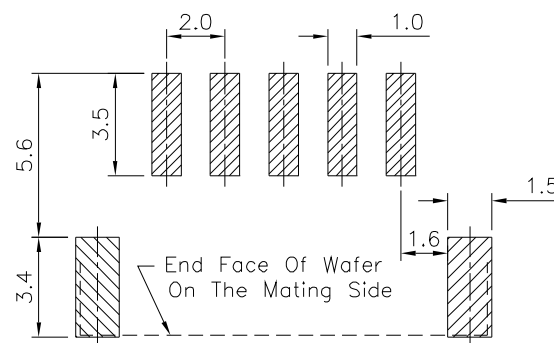
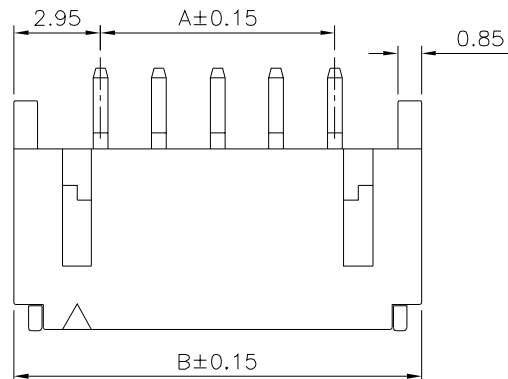
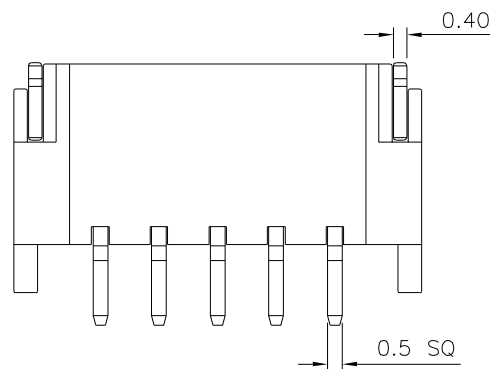


△ SPECIFICATION

Current Rating:2A AC/DC
 Voltage Rating:100V AC/DC
 Withstand Voltage:800V AC/Minute
 Contact Resistance:Initial Value 10 Milliohms Max.
 After Environmental Testing 20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-40°C~+85°C
 Applicable PC Board Thickness:0.8~1.6mm
 △ Insulator:HTN(UL94V-0)
 △ Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

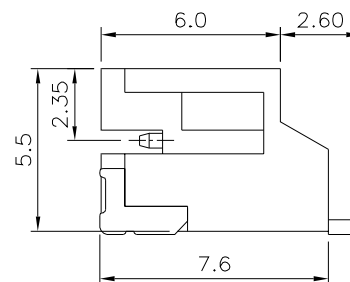

Recommended P.C.Board Layout △

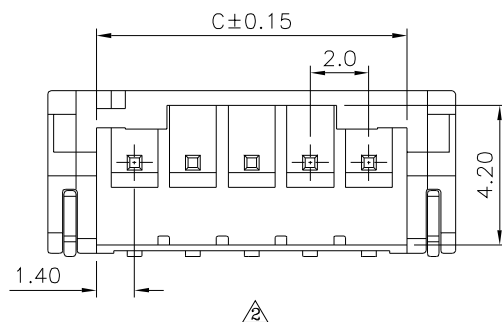

△△

Pin	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80
16	30.00	36.00	32.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

17319

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △△ .X ±0.3
 .XX ±0.2
 ANG.

UNIT
 mm



△ A3

Modify Data

HZF

08/14/2018

△ A2

Modify Data

HZF

10/04/2013

△ A1

Modify Data

HZF

08/09/2012

△ A0

NEW RELEASE

HZF

12/27/2007

NO. REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

A3