


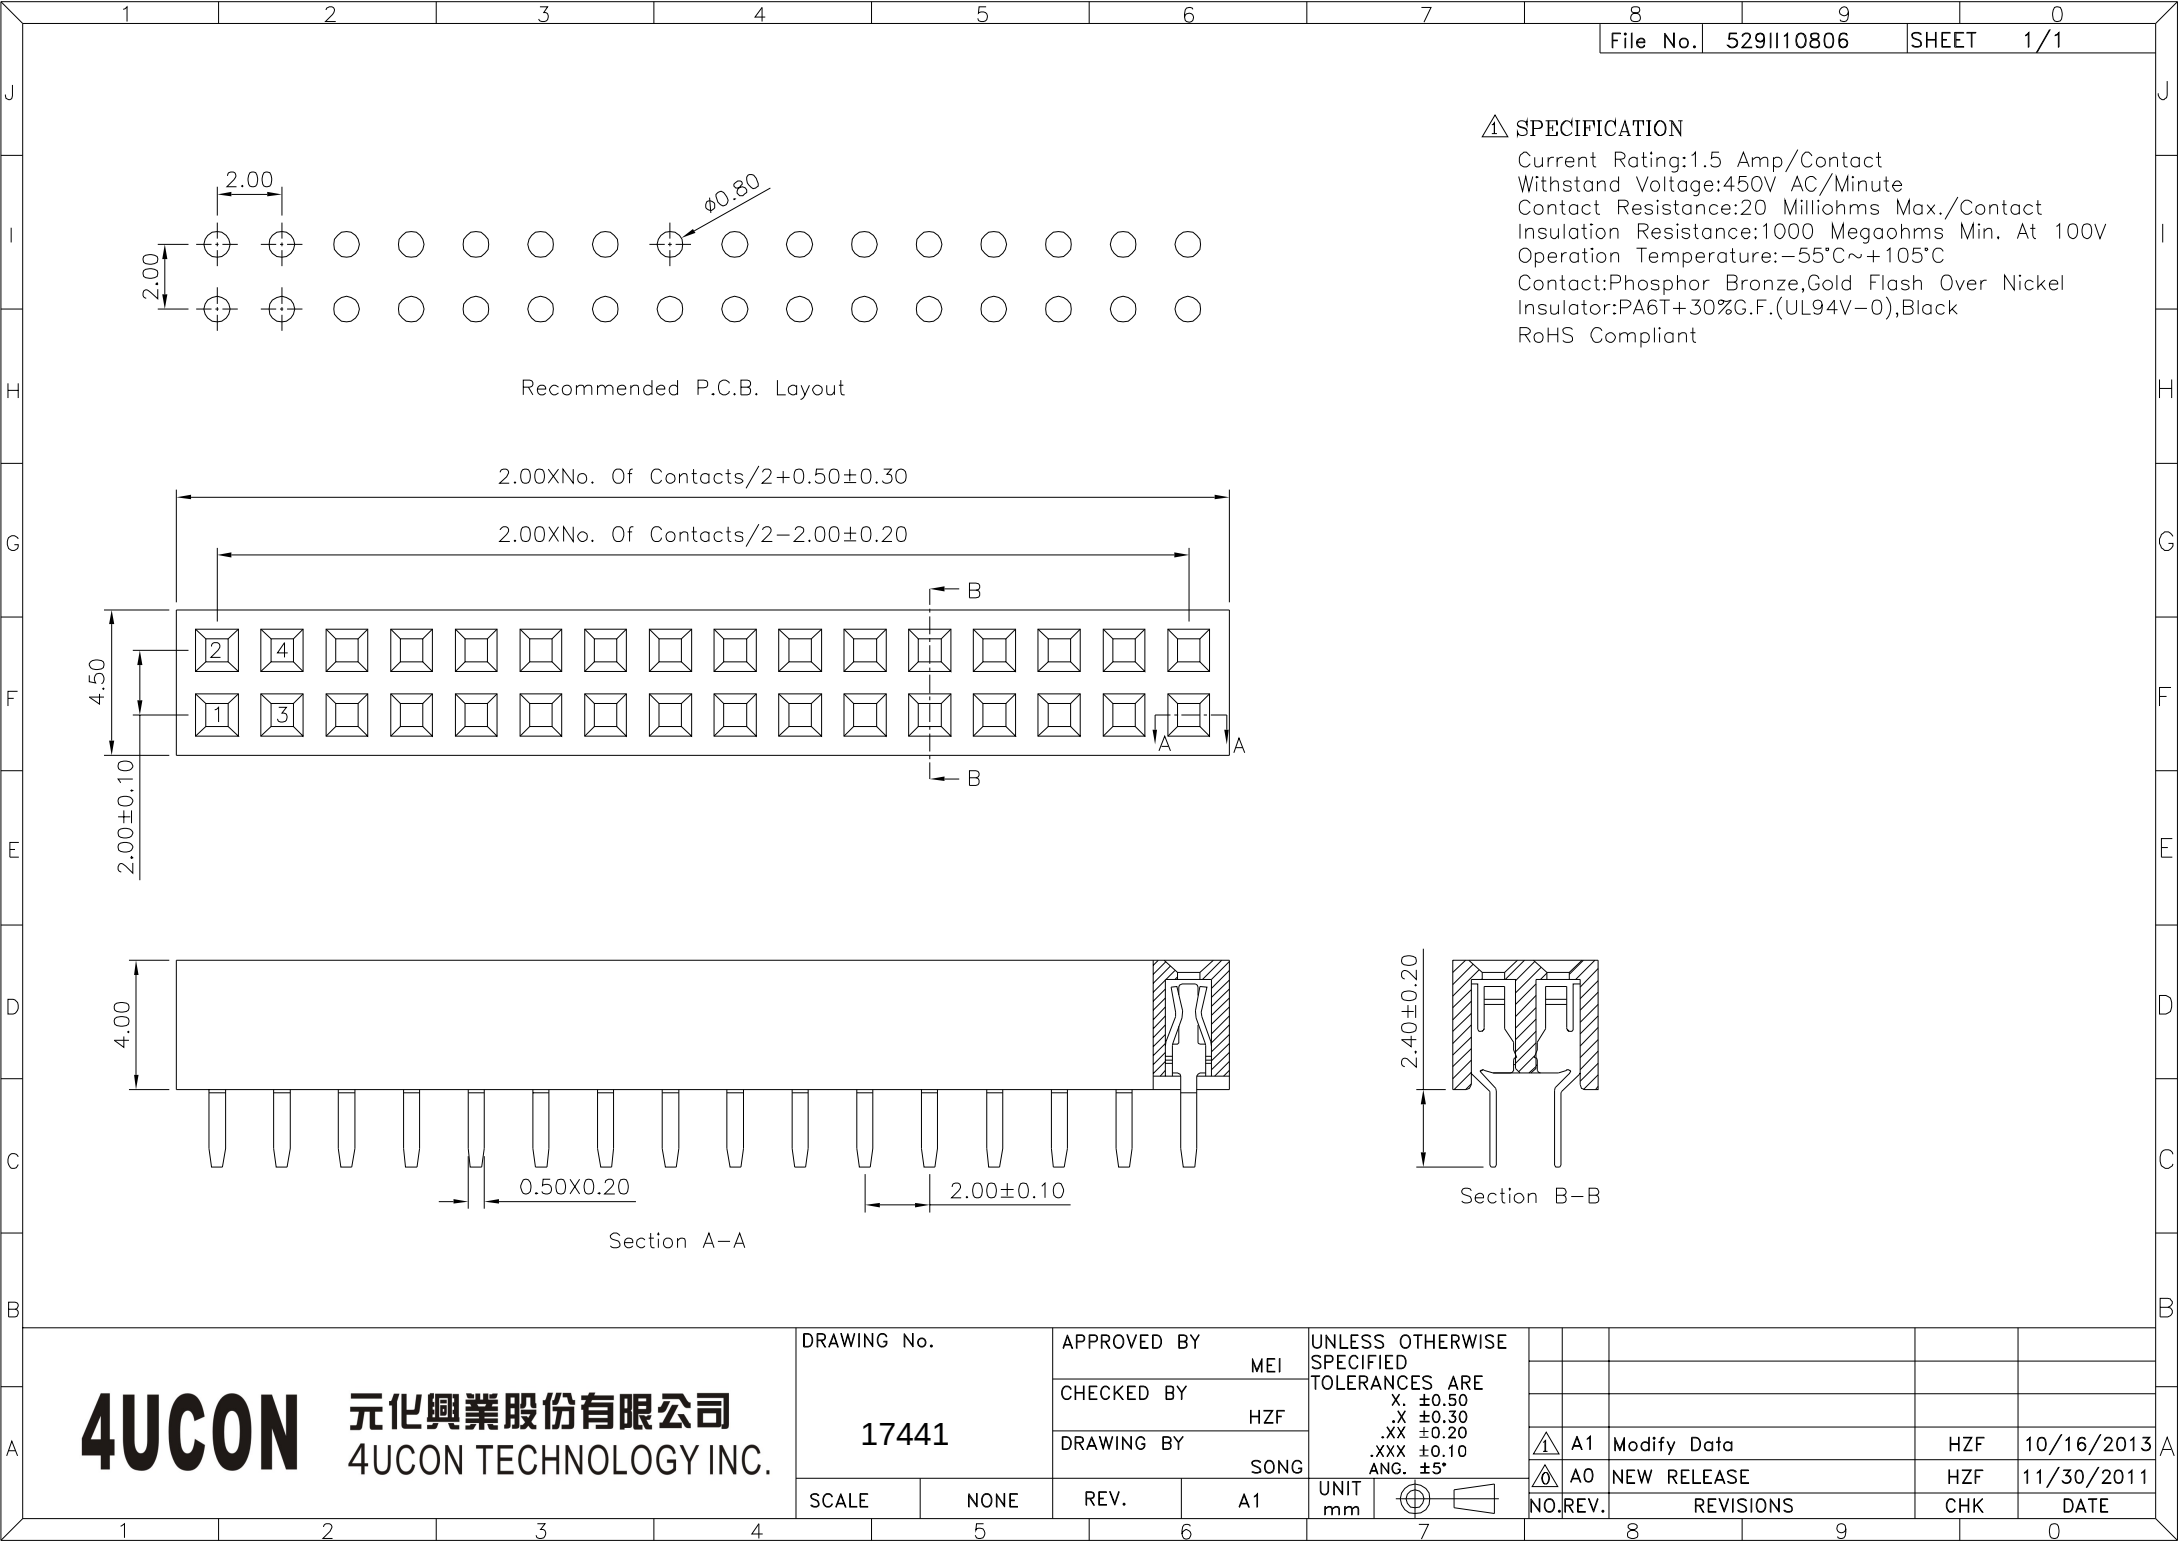

**△ SPECIFICATION**  
Current Rating:1.5 Amp/Contact  
Withstand Voltage:450V AC/Minute  
Contact Resistance:20 Milliohms Max./Contact  
Insulation Resistance:1000 Megaohms Min. At 100V  
Operation Temperature:-55°C~+105°C  
Contact:Phosphor Bronze,Gold Flash Over Nickel  
Insulator:PA6T+30%G.F.(UL94V-0),Black  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |      |             |    |
|-------------|------|-------------|----|
| DRAWING No. |      | APPROVED BY |    |
|             |      | MEI         |    |
|             |      | CHECKED BY  |    |
| 17441       |      | HZF         |    |
|             |      | DRAWING BY  |    |
|             |      | SONG        |    |
| SCALE       | NONE | REV.        | A1 |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X.  $\pm 0.50$   
.X  $\pm 0.30$   
.XX  $\pm 0.20$   
.XXX  $\pm 0.10$   
ANG.  $\pm 5^\circ$

UNIT mm

|          |             |     |      |            |  |
|----------|-------------|-----|------|------------|--|
|          |             |     |      |            |  |
|          |             |     |      |            |  |
|          |             |     |      |            |  |
| △ A1     | Modify Data |     | HZF  | 10/16/2013 |  |
| △ A0     | NEW RELEASE |     | HZF  | 11/30/2011 |  |
| NO. REV. | REVISIONS   | CHK | DATE |            |  |