
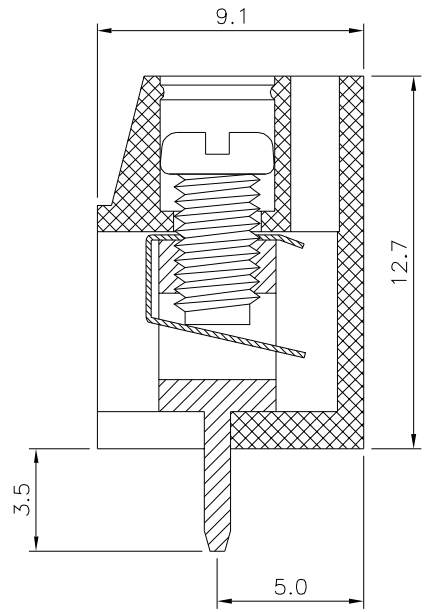


Recommended P.C.B. Layout

**SPECIFICATION**

Current Rating:15A/Way Max.  
 Voltage Rating:250V AC  
 Contact Resistance:20 Milliohms Max.  
 Withsand Voltage:2500V AC(1 Minute)  
 Test Time=60 Sec./1Pcs  
 Wire Range:14~24 AWG  
 Operation Temperature:-40°C~+105°C  
 Torque:4.0 Kgf.cm/M3.0  
 Insulator Body(Housing):Polyamide(UL94V-0),Blue  
 Terminal:Copper Alloy,Tin Plated  
 Screw:Steel,Galvanized With Cr3+ Plated  
 Wire Guard:Stainless Steel  
 RoHS Compliant

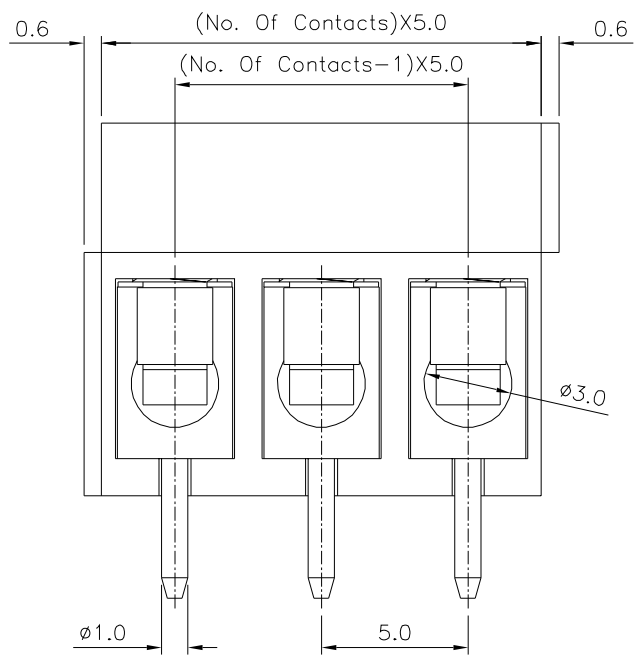

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.50$ .X $\pm 0.30$ .XX $\pm 0.20$ ANG. $\pm 1^\circ$
17600		EMILY		
		CHECKED BY HZF		
DRAWING BY		SAN		UNIT mm
SCALE	NONE	REV.	BO	

NO.	REV.	REVISIONS	CHK	DATE
△	B0	NEW RELEASE	HZF	10/17/2023