

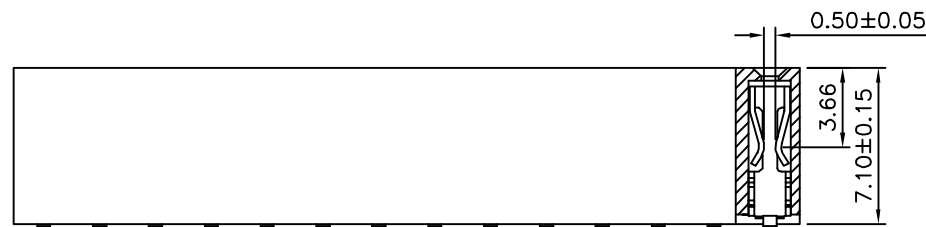


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

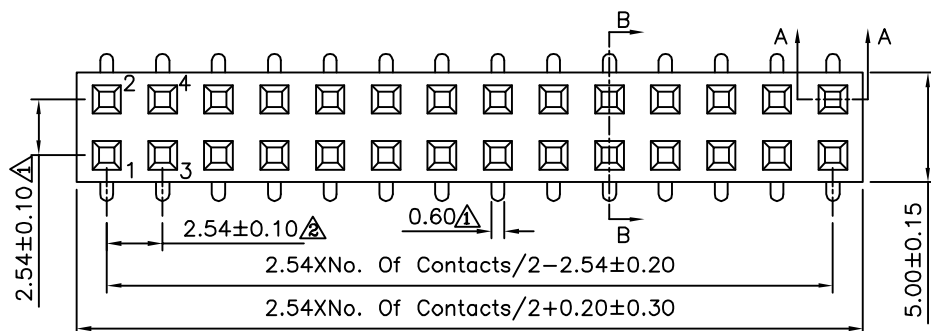

Section A-A



Section B-B

△ SPECIFICATION

Rated Current:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17654

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ± 0.40
△ .XX ± 0.25
△ .XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



	A3	Modify Data	HZF	08/09/2012
	A2	Modify 2.54±1.10-->2.54±0.10	HZF	10/17/2011
	A1	Modify Data	HZF	01/16/2010
	A0	NEW RELEASE	BECKY	04/11/2005
NO. REV.	REVISIONS		CHK	DATE