| File No. | 689EA09806 | SHEET | 1/1 |
|---|---|---|---|

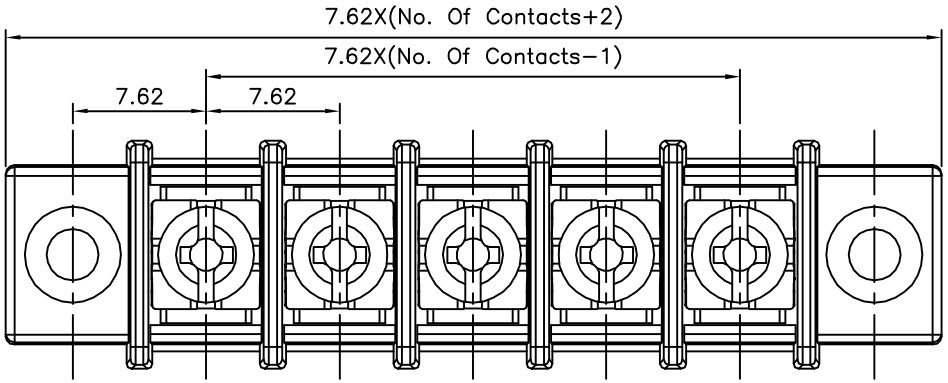


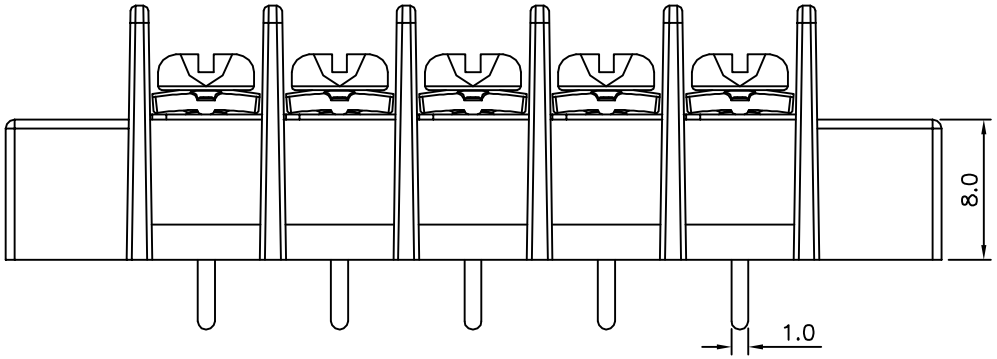


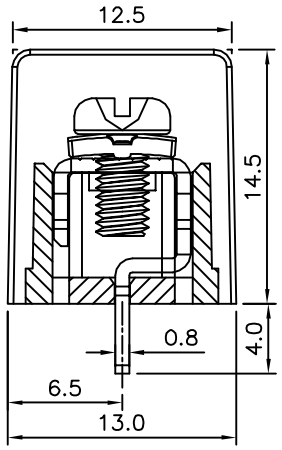


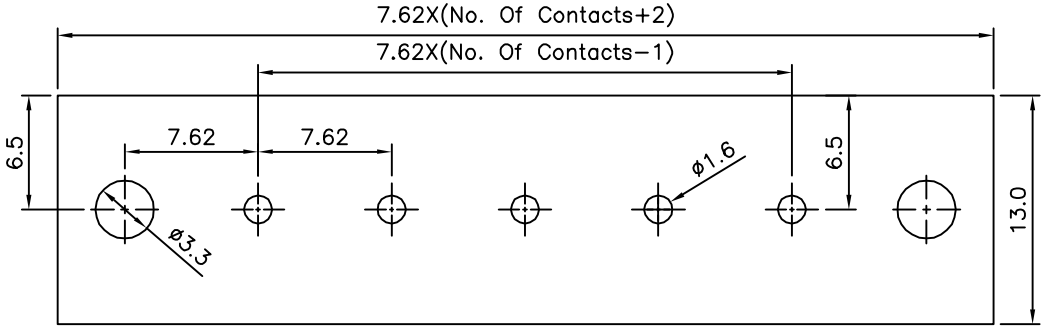


Recommended P.C.B. Layout

**SPECIFICATION**

Current Rating:15 Amps/Way Max.
Voltage Rating:250V AC
Contact Resistance:20 Milliohms Max.
Operation Temperature:−40°C~+105°C
Soldering Reliability:Test Temperature:
250°C±10°C/5s Max.
Withstanding Voltage:2500V AC (1 Minute)
Test Time=60s/1 PCS
Wire Range:16~22 AWG
Torque:6 Kgf.cm/M3.0
Insulator Body(Housing):PA66+G.F.(UL94V−0),Black
Terminals:Copper Alloy,Tin Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
RoHS Compliant

| | | | |
|---|---|---|---|
| 4UCON | 元化興業股份有限公司<br>4UCON TECHNOLOGY INC. | DRAWING No. 17773 | APPROVED BY EMILY |
| | | | CHECKED BY HZF |
| | | | DRAWING BY YBL |
| | | SCALE NONE | REV. A0 |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°
UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| △0 | A0 | NEW RELEASE | HZF | 07/09/2013 |