
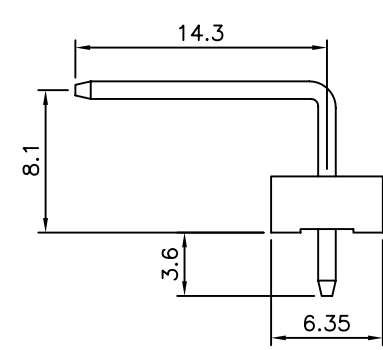
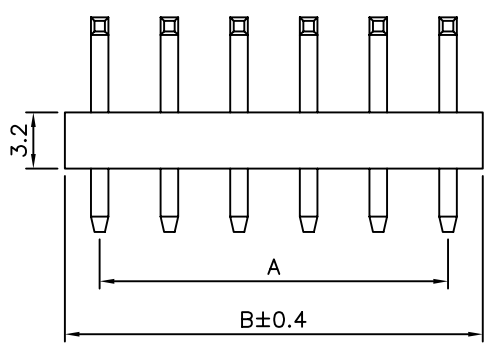


SPECIFICATIONS
 Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 10 Milliohms Max.
 After Environmental Testing/20 Milliohms Max.
 Dielectric Withstanding Voltage: 1500V AC/Minute
 Ambient Temperature Range: -40°C~+105°C
 (Including Temperature Rise)
 Base: UL94V-2 Nylon 66
 Post: 1.14mm Square Wire Pins
 Tin-Plated Brass Pin Plating Options Available

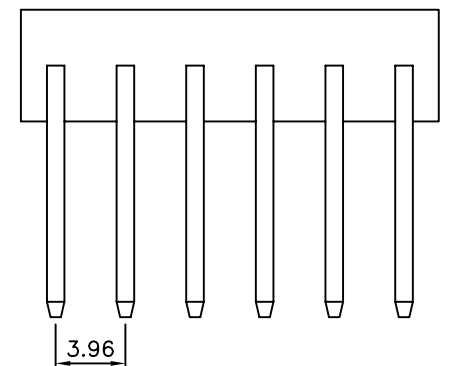

Pin	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.08
17798		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		PEGA		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	04/25/2006