
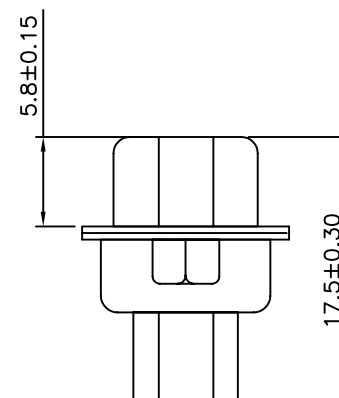
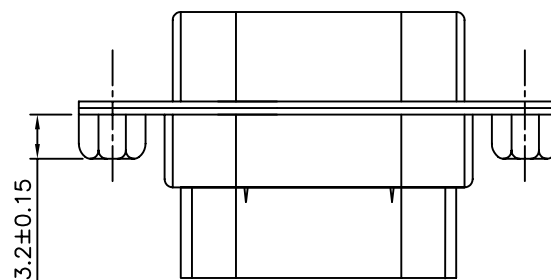


SPECIFICATIONS

Current Rating: 1A Max.
 Dielectric Withstanding Voltage: 750V(AC) For 1 Min.
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Total Mating Force: 7.0 Kgf Max.
 Total Unmating Force: 1.5 Kgf Min.
 Temperature Range: -55°C~85°C
 Insulator: High Temperature Thermoplastic
 With G.F,UL 94V-0
 Contact: Copper Alloy,T=0.20mm
 Selective Au Plated On Mating Area
 Shell: SPCC,T=0.30mm

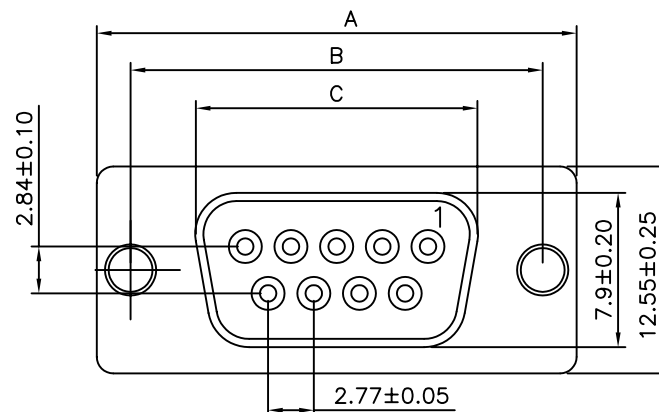

Contact	A±0.25	B±0.20	C±0.20
09	30.81	24.99	16.35
15	39.25	33.32	24.51
25	53.04	47.04	38.35
37	69.50	63.50	54.84

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17875

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.3
 .XX ±0.20
 .XXX ±0.100
 ANG. ±1°

UNIT
 mm



NO.

REV.

BO

NEW RELEASE

BECKY

02/27/2006

CHK

DATE

SCALE

NONE

REV.

BO

REVISIONS

CHK

DATE