




△ Recommended P.C.B. Layout

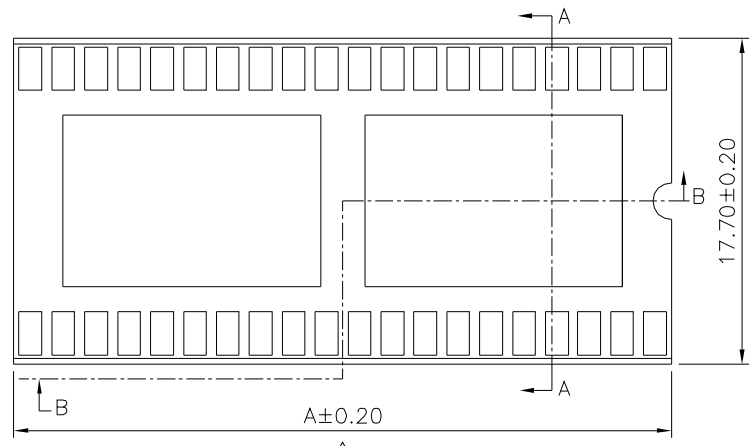

△

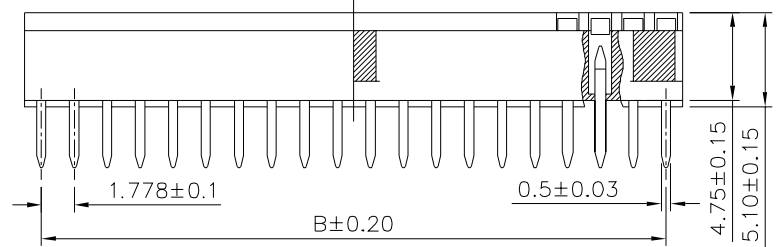

△ Section B-B

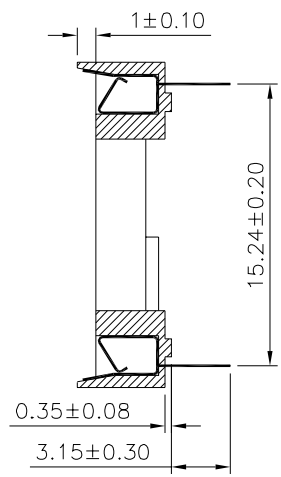

△ Section A-A

△ SPECIFICATION

Current Rating:1A
 Dielectric Withstanding Voltage:1000V RMS/Minute
 Insulator Resistance:5000 Megaohms Min.
 Operating Temperature:-55°C To 85°C
 Contact Resistance:20 Milliohms initial.
 30 Milliohms After Test.
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 Insulator:PBT(UL94V-0)
 RoHS Compliant

| Pin | A | B |
|-----|-------|-------|
| 40 | 35.56 | 33.78 |
| 42 | 37.34 | 35.56 |
| 48 | 42.67 | 40.89 |
| 52 | 46.23 | 44.45 |
| 54 | 48.01 | 46.23 |
| 56 | 49.78 | 48.01 |
| 58 | 51.56 | 49.78 |
| 60 | 53.34 | 51.56 |
| 62 | 55.12 | 53.34 |
| 64 | 56.90 | 55.12 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|-----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. |
| 17881 | | MEI | | |
| | | CHECKED BY | HZF | |
| | | DRAWING BY | CYP | |
| SCALE | NONE | REV. | A2 | UNIT mm |

| | | | | |
|-----|------|-------------|-------|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △A2 | | Modify Data | HZF | 02/07/2017 |
| △A1 | | Modify Data | SHIN | 08/31/2006 |
| △A0 | | NEW RELEASE | BECKY | 07/19/2004 |