File No.	205	SHEET	1 /1

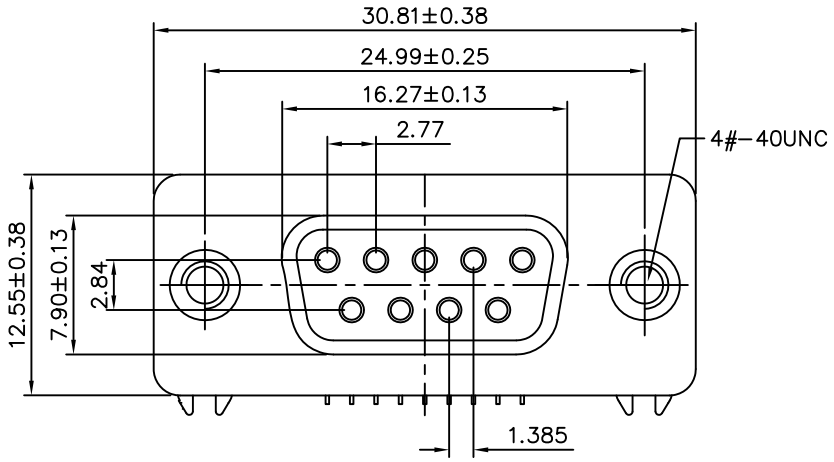

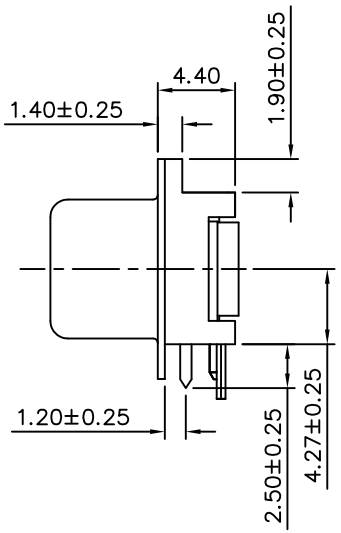

SPECIFICATIONS

Contact Current Rating: 3 Amp
Dielectric Withstanding Voltage: AC 1000/60Sec. RMS
Insulation Resistance: 5000 Megohms Min. At DC 500V
Contact Resistance: 25 Milliohms Max.
Operating Temperature: −55°C To +105°C
Contact Insertion Force: 341g Max.
Contact Separation Force: 21g Min.
Insulator: PBT UL 94V–0 Rated
Contact: Brass,Gold Flash
Shell: Cold Roller Steel,Nickel Plated

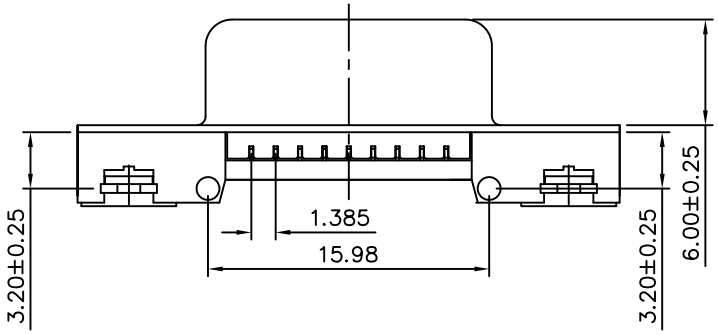

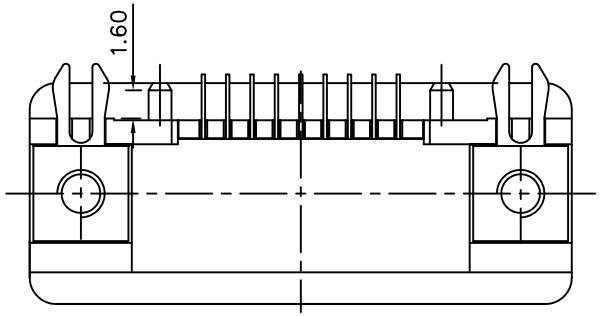

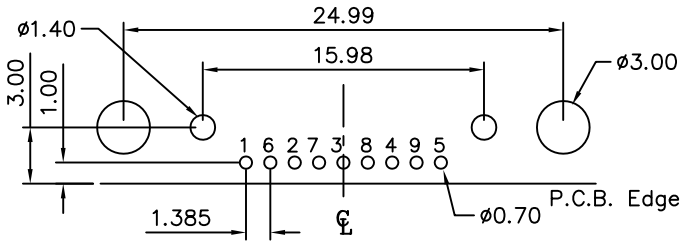

Recommended PCB Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
18073	MEI	.XX ±0.25			
	CHECKED BY BECKY	.XXX ±0.130			
	DRAWING BY TCF	.X° ±2°			
SCALE NONE	REV. A0	UNIT mm	⓪ A0	NEW RELEASE	BECKY 12/19/2005
			NO. REV.	REVISIONS	CHK DATE