
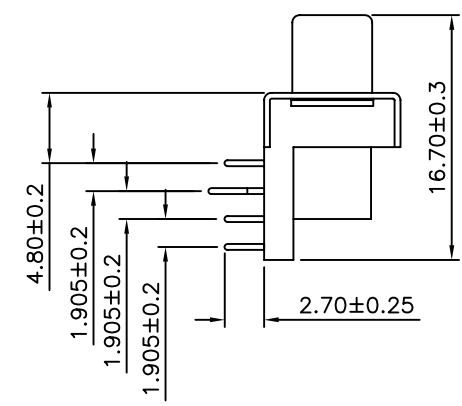
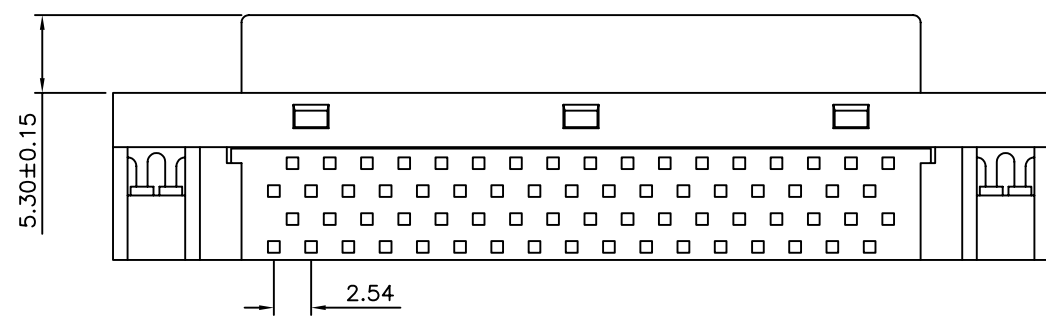
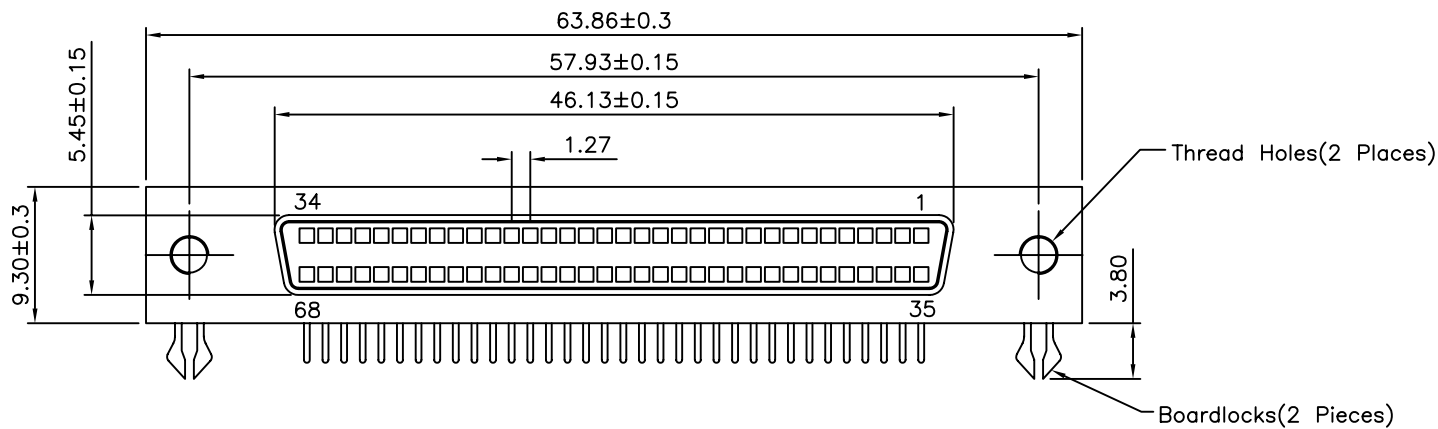


SPECIFICATION

Contact Current Rating: 1Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 500 Megohms Min.
 Contact Resistance: 35 Milliohms Max.
 Operation Temperature: -55°C To +105°C
 Housing And Cover: Plastic Thermoplastic
 P.B.T UL94V-0, Black
 Contact: Phosphor Bronze, Gold Selective Plated
 Front Shell: Steel, Nickel Plated Over Copper
 Bracket: Steel, Nickel Plated Over Copper
 Boardlock: Brass, Tin Plated Over Copper

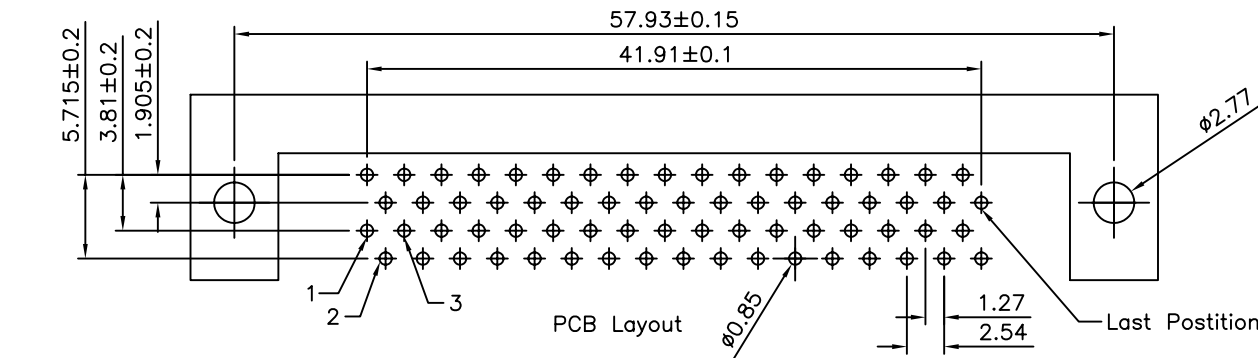

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 18105

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY PEGA

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. BO

UNIT mm

BO	NEW RELEASE	HZF	03/15/2007
NO. REV.	REVISIONS	CHK	DATE