


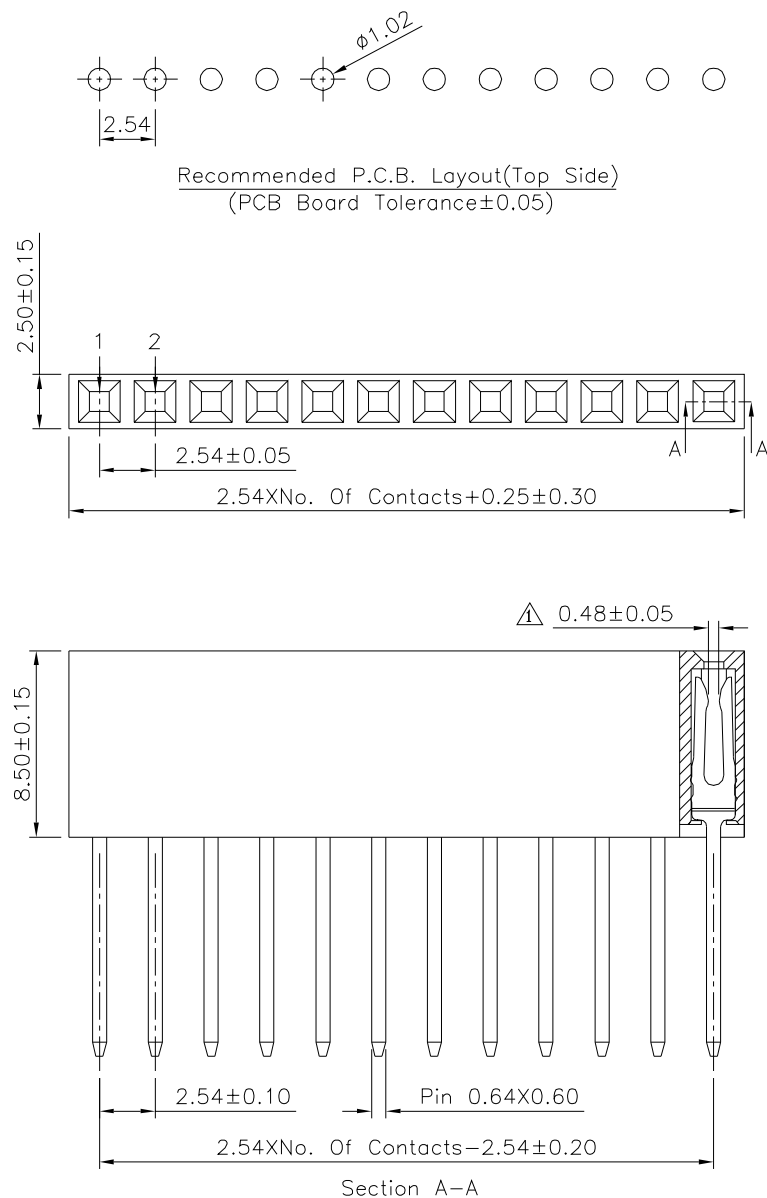

SPECIFICATION

Current Rating:3.0 Amp

Withstand Voltage:1000V AC/DC

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

⚠ Contact: Brass, Gold Plated Over Nickel

Insulator: PBT+30%G.F.(UL94V-0), Black

RoHS Compliant

DRAWING No. 18164		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY		CYP		⚠ A1	Modify Data		HZF	03/10/2020
						⚠ A0	NEW RELEASE		HZF	10/16/2012
SCALE	NONE	REV.	A1	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.