
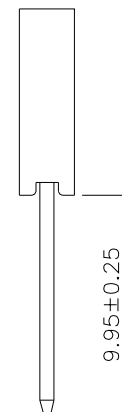
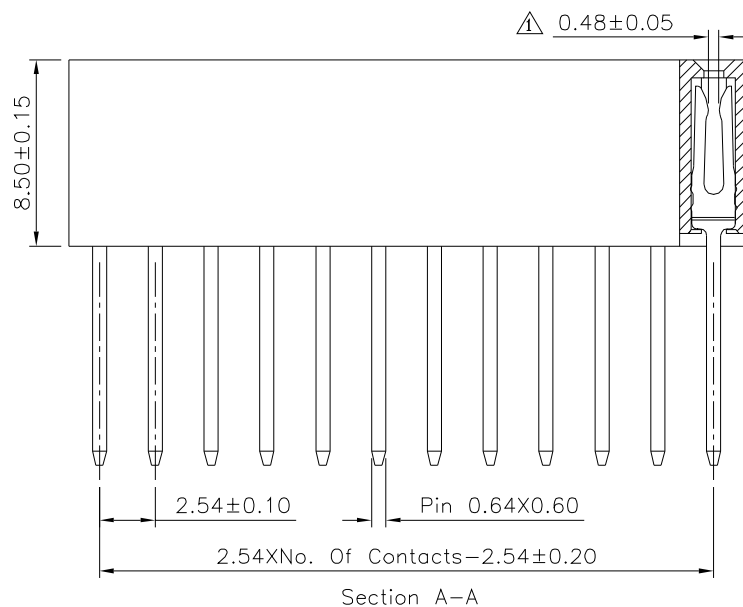


SPECIFICATION

Current Rating:3.0 Amp
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−40°C~+105°C
 ⚠ Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V−0),Black
 RoHS Compliant

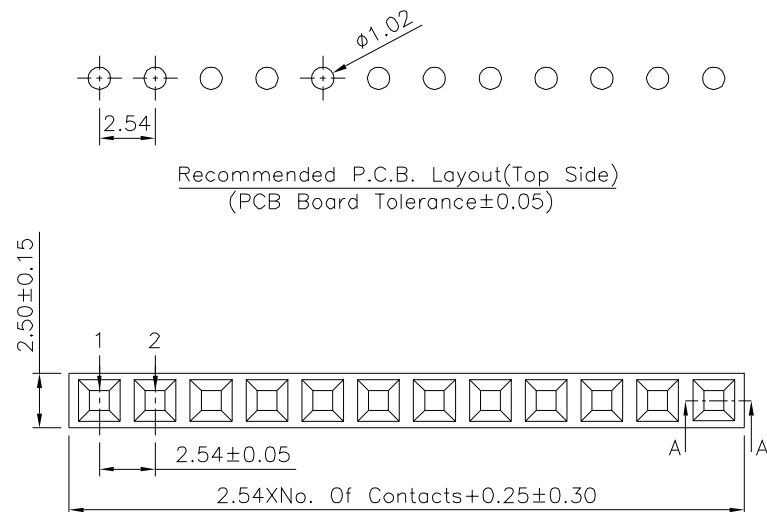

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18169

APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°


SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

⚠ A1	Modify Data	HZF	03/10/2020
⚠ A0	NEW RELEASE	HZF	10/16/2012