




△ Recommended P.C.B. Layout

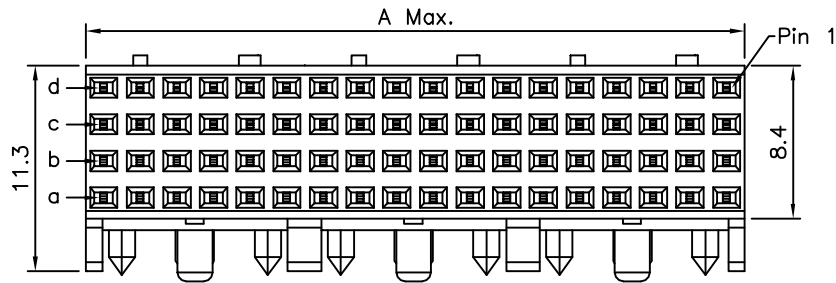


△

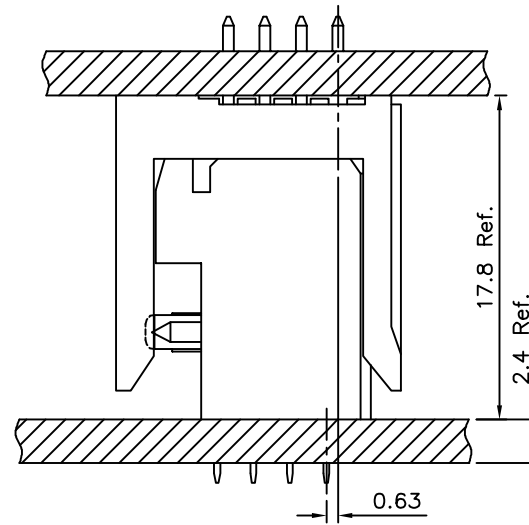

△ Board To Board Offset Application Example

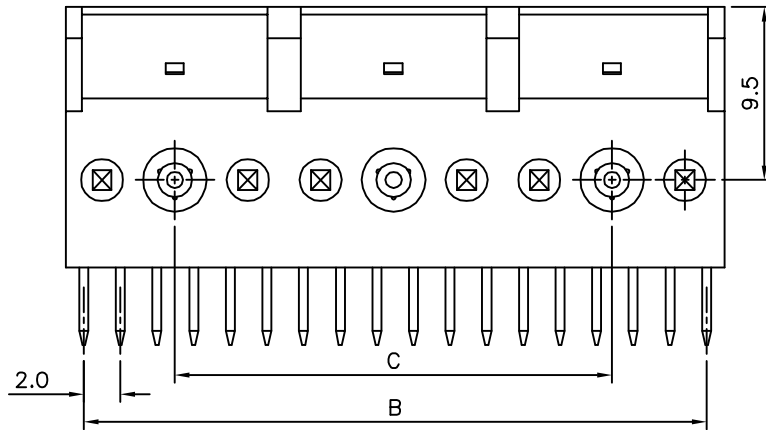

△

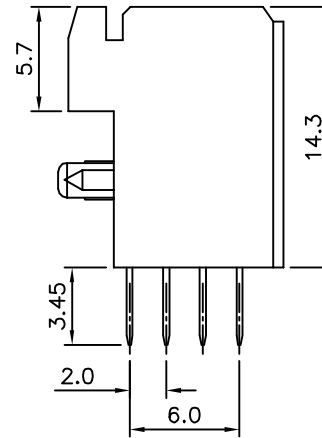

△

SPECIFICATION

Current Rating:1 Amp
 Dielectric Withstanding Voltage:AC 1000V For 1 Minute
 Insulation Resistance:1000 Megaohms Min. At DC 500V
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Operation Temperature:-55°C~+125°C
 Housing:LCP(UL94V-0)
 Contact:Phosphor Bronze
 Gold Plated 10u" On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

△

Pin	A	B	C
24	11.95	10.0	0
48	23.95	22.0	12.0
72	35.95	34.0	24.0
96	47.95	46.0	36.0
120	59.95	58.0	48.0
144	71.95	70.0	60.0
168	83.95	82.0	72.0
192	95.95	94.0	84.0

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18240

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ X. ±0.5
 .X ±0.25
 .XX ±0.15

UNIT mm



△ A1

Modify Data

HZF

12/20/2013

△ A0

NEW RELEASE

BECKY

07/01/2005

NO. REV.

REVISIONS

CHK

DATE