

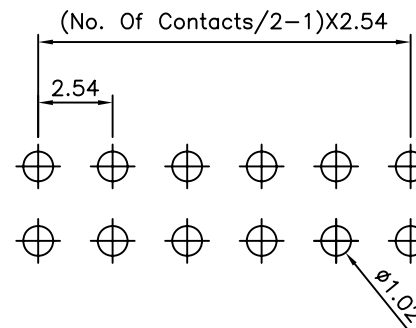
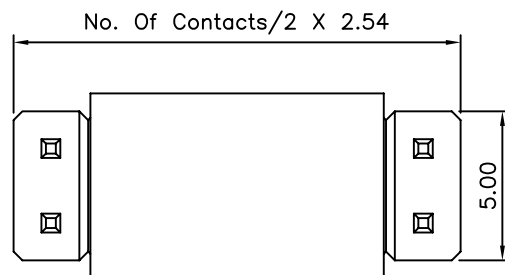


SPECIFICATIONS

Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:AC 1000V RMS
 Operating Temperature:-55°C To +105°C
 Housing:Nylon 6T,UL94V-0
 Contact:Copper Alloys
 Plated:Gold-Flash
 Color:Natural(Black)

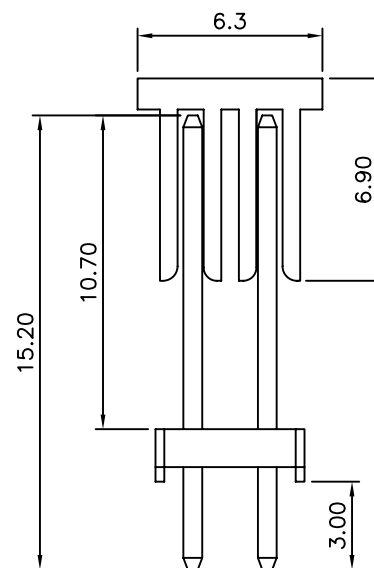

Recommended P.C.B Layout

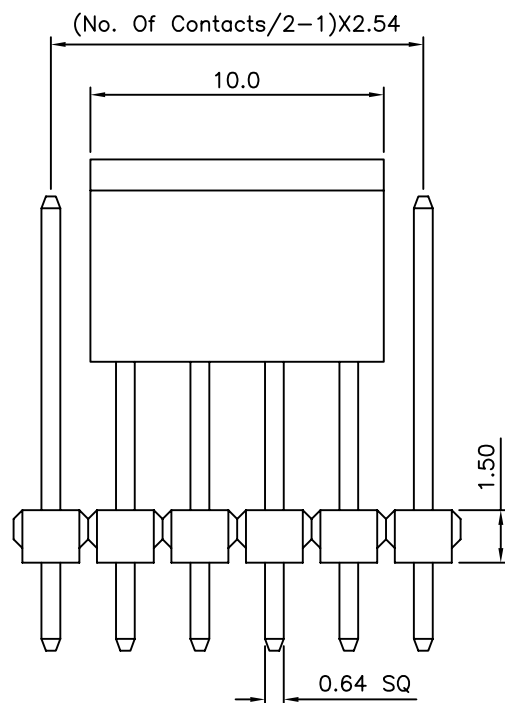

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

PART No.

18283

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG ±5°

SCALE


NONE

REV.

A0

UNIT

mm



NO. REV.

A0

NEW RELEASE

REVISIONS

CHK

HZF

11/21/2006

DATE