





**△ SPECIFICATION**

Current Rating:1 Amp  
 Withstand Voltage:500V AC  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Max. Processing Temperature:230°C For 30~60s  
 (260°C For 10s)

Insulator:LCP(UL94V-0),Black  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 No. Of Contacts:06~100 Contacts  
 RoHS Compliant

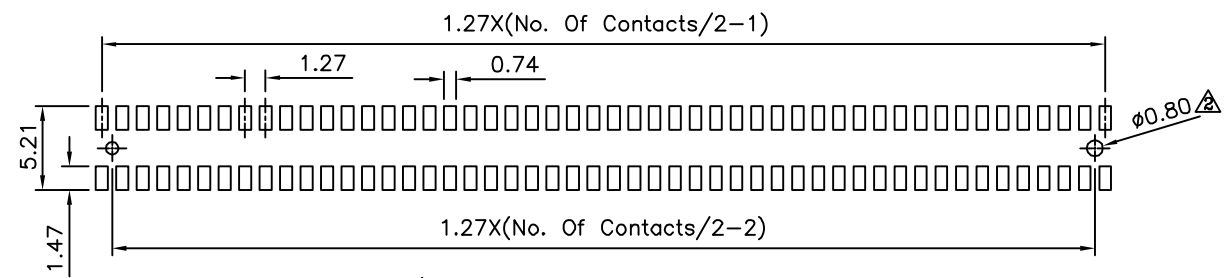

△ Recommended P.C.B. Layout

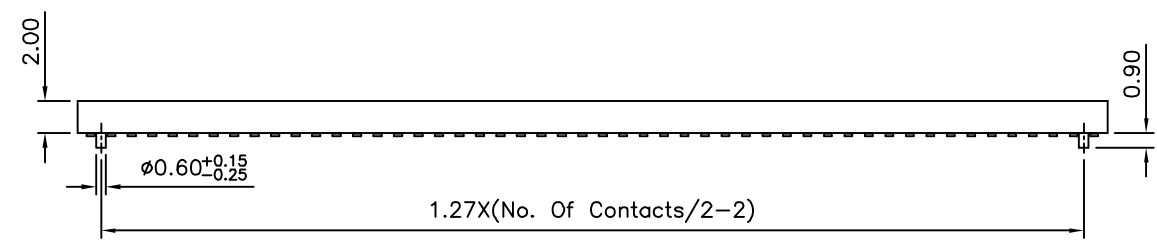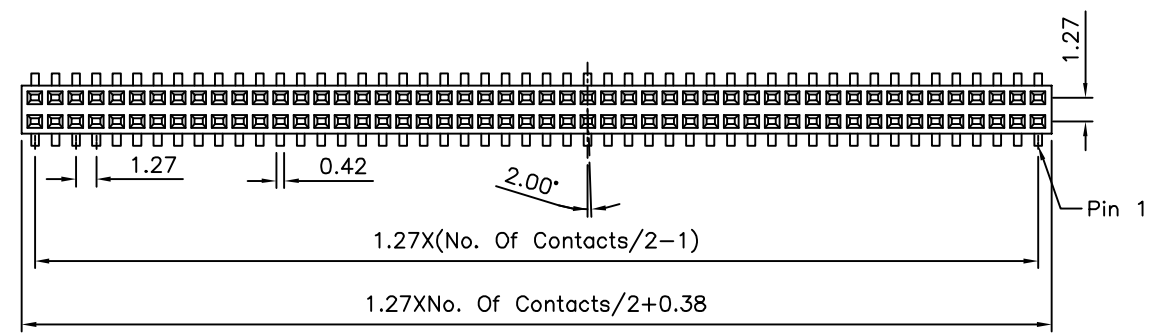

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.50 X ±0.35 .XX ±0.25 .XXX ±0.05
18360		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/08/2012
△ A1		Modify PCB Layout	BECKY	04/11/2006
△ A0		NEW RELEASE	BECKY	04/06/2005