


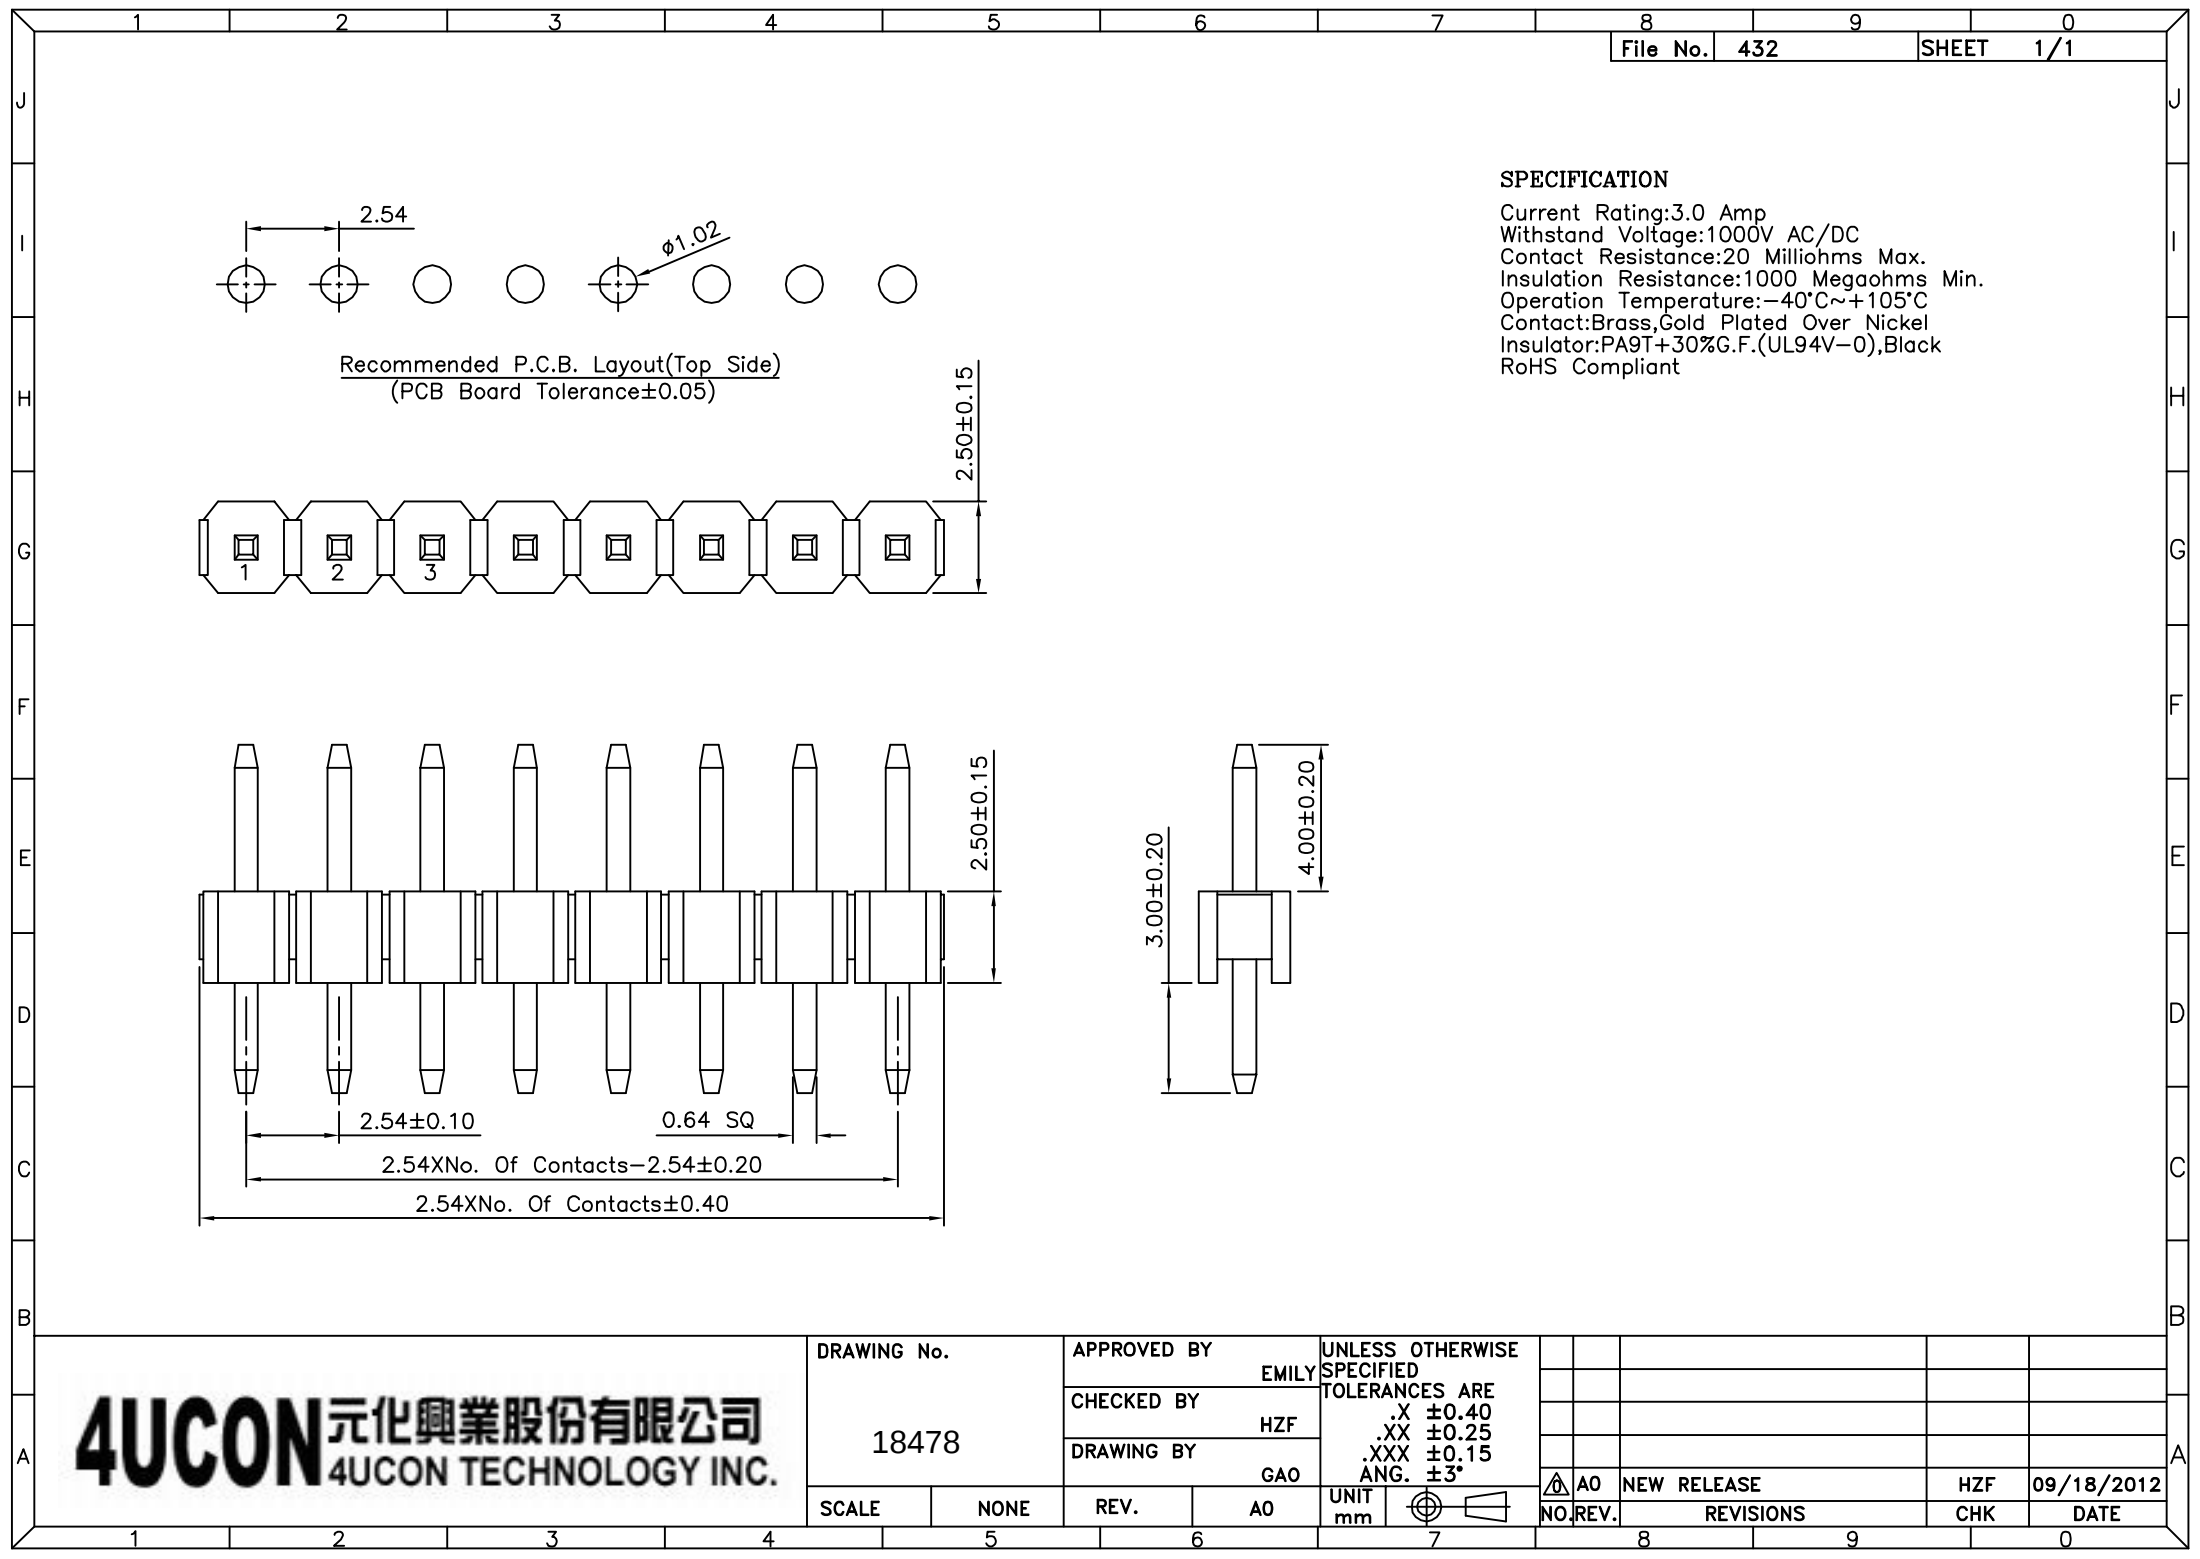

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

DRAWING No.

18478

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

SCALE NONE

REV. A0

△ A0

NEW RELEASE

HZF

09/18/2012

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.