
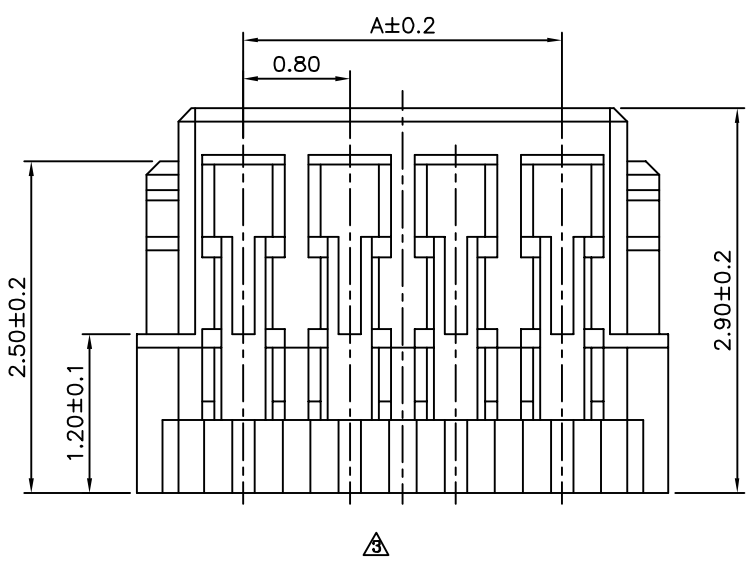
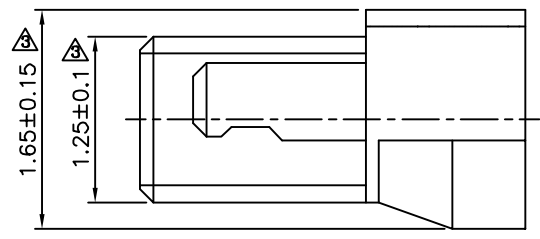


SPECIFICATION

Current Rating:1A AC/DC
 Voltage Rating:50V AC/DC
 Withstanding Voltage:300V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:300 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Material:PA66(UL94V-0)
 RoHS Compliant

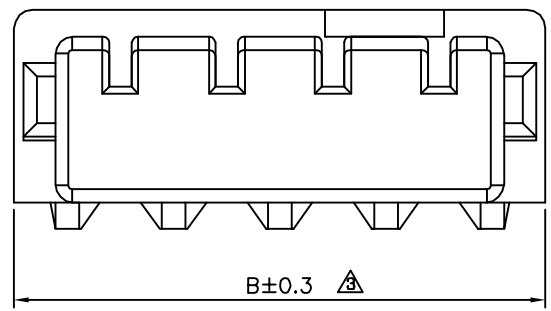

Pin	A	B
2	0.80	2.40
3	1.60	3.20
4	2.40	4.00
5	3.20	4.80
6	4.00	5.60
8	5.60	7.20
10	7.20	8.80
12	8.80	10.40
14	10.40	12.00
15	11.20	12.80
16	12.00	13.60
17	12.80	14.40
20	15.20	16.80
22	16.80	18.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.15 .XX ± 0.05 ANG $\pm 1^\circ$
18491		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A3	

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	01/19/2013
△A2		Modify Data	HZF	08/04/2008
△A1		Modify Data	BECKY	03/21/2006
△A0		NEW RELEASE	BECKY	08/15/2005