

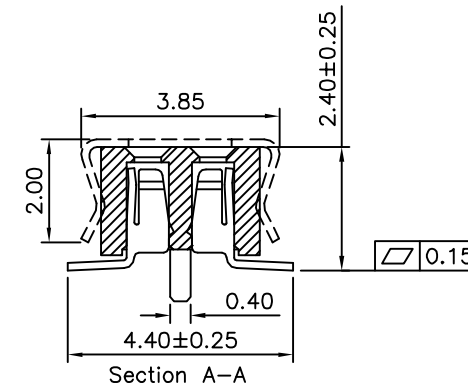
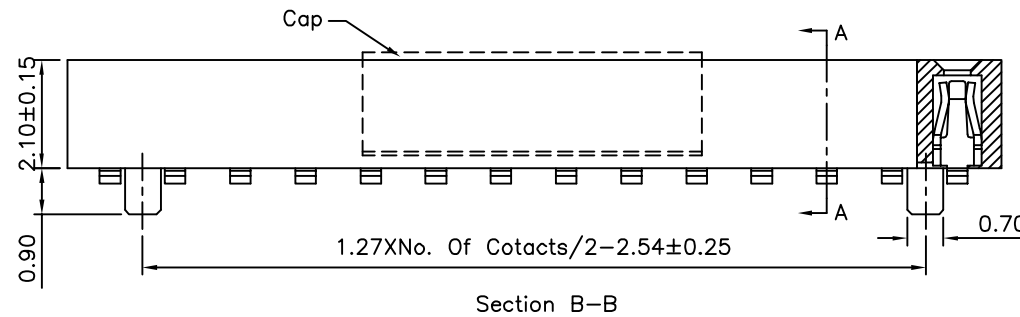
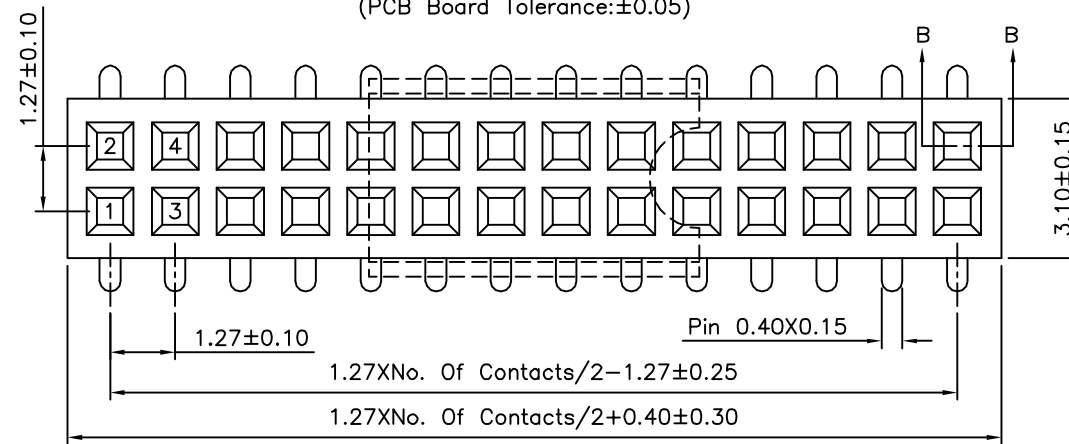


SPECIFICATION

Current Rating:1.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Resistance To Solder Heat:250 Degrees C,10s Max.
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

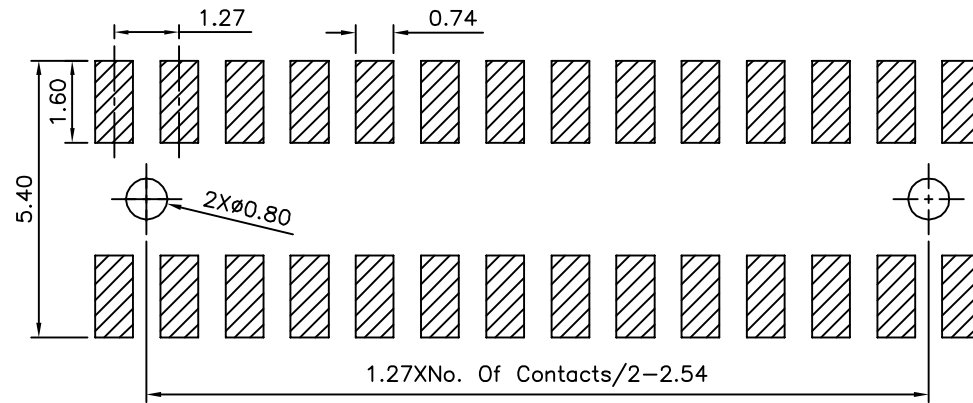

Special Cap For 2X02 Pin
 2X03 Pin,2X04 Pin

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18493

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°


SCALE

NONE

REV.

A0

UNIT
 mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK




DATE

HZF

09/01/2012

SPECIFICATION

Material:Black Conductive Polystyrene
 Reel Size:13"X24mm
 CarrierTape Size:24mmX16800mm
 Cover Tape Size:21.3mm(W)
 RoHS Compliant

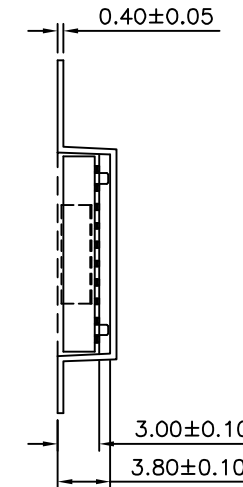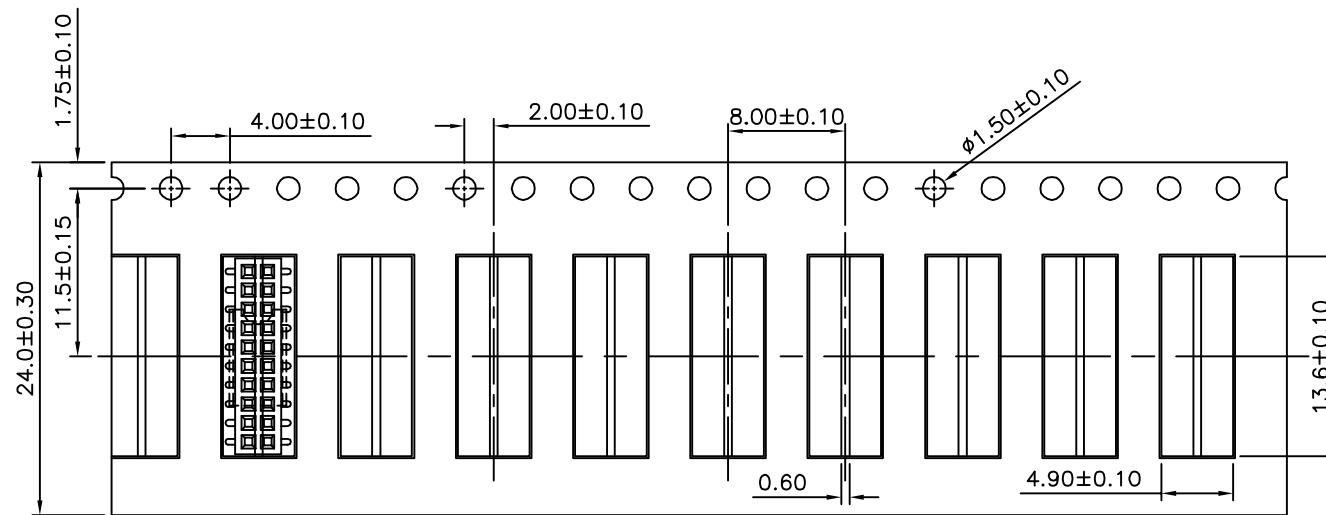

No. Of Position/Per Row	Q'ty/Reel
10P	2000 PCS

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18493

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.10
 .XX ±0.05
 .XXX ±0.02
 ANG. ±2°

UNIT
 mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

AO

NEW RELEASE

HZF

09/01/2012