
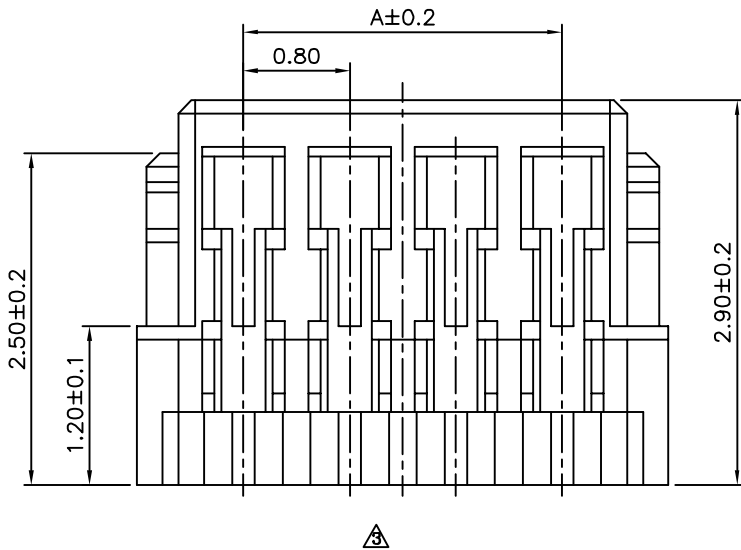
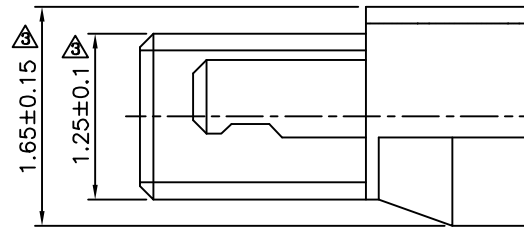


**SPECIFICATION**

Current Rating:1A AC/DC  
 Voltage Rating:50V AC/DC  
 Withstanding Voltage:300V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:300 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-0)  
 RoHS Compliant

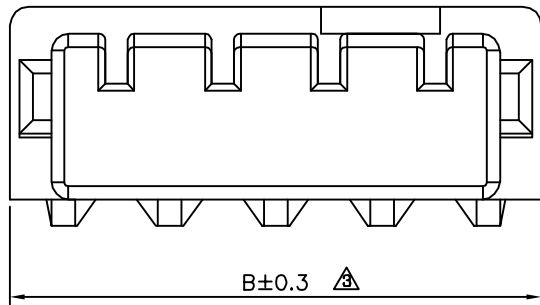

Pin	A	B
2	0.80	2.40
3	1.60	3.20
4	2.40	4.00
5	3.20	4.80
6	4.00	5.60
8	5.60	7.20
10	7.20	8.80
12	8.80	10.40
14	10.40	12.00
15	11.20	12.80
16	12.00	13.60
17	12.80	14.40
20	15.20	16.80
22	16.80	18.40

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 18699

APPROVED BY  
 EMILY  
 CHECKED BY  
 HZF  
 DRAWING BY  
 SONG

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.15  
 .XX ±0.05  
 ANG ±1°

SCALE NONE

REV. A3

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	01/19/2013
△A2		Modify Data	HZF	08/04/2008
△A1		Modify Data	BECKY	03/21/2006
△A0		NEW RELEASE	BECKY	08/15/2005