

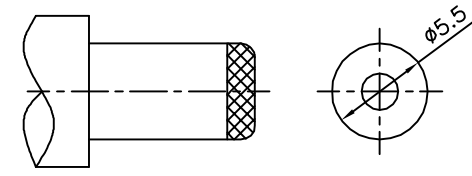


**△ SPECIFICATION**  
 Rating:DC 20V,2.5A  
 Contact Resistance:30 Milliohms Max.  
 After Test:50 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.(500V DC)  
 After Test:50 Megaohms Min.  
 Withstand Voltage:500V AC  
 Insertion And Extraction Force:3~30N  
 Life Test:5000 Cycles Min.  
 Operation Temperature Range:-20°C~+70°C  
 Preservative Temperature Range:-40~+85°C  
 RoHS Compliant

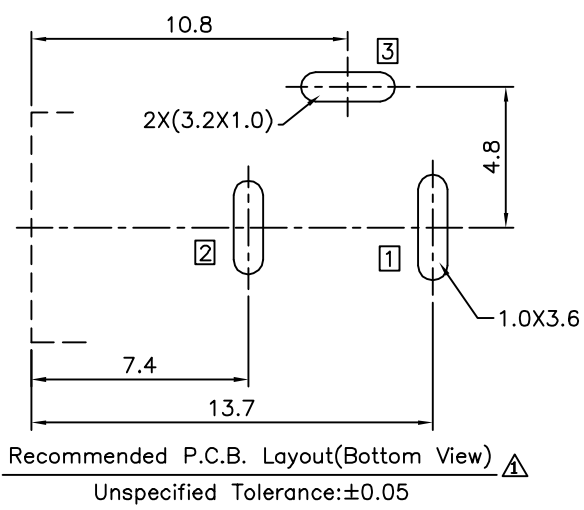

□:Terminal No.

⑥	Shunt Terminal	3	1	Brass	Tin Plated
⑤	Tip Spring	2	1	Phosphor Bronze	Tin Plated
④	Center Pin Terminal	1	1	Brass	Tin Plated
③	Center Pin	1	1	Brass	CuSn Plated
②	Cover		1	PBT,UL94V-0	
①	Housing		1	PBT,UL94V-0	Black
No.	Description	Q'ty		Material	Remark

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.3 ANG. ±2°
18750		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	UNIT mm

△ A1	Modify Data	HZF	06/21/2014
△ A0	NEW RELEASE	HZF	12/10/2009
NO. REV.	REVISIONS	CHK	DATE