


SPECIFICATION

Voltage Rating: 250V AC Max.
 Current Rating: 3 Amps
 Insulation Resistance: 1000 Megohms Min. At 500V DC
 Contact Resistance: 10 Milliohms Max.
 Dielectric Withstanding Voltage: 1000V AC/Minute
 Operating Temperature: -60°C To +125°C
 Insulator: PBT, Rated UL 94V-0
 Contact: Copper Alloy
 Contact Plating: Underplate: 50u" Nickel
 Contact Area: 2u" Selective Gold
 Solder Tails Area: 100u" Tin

RoHS Compliant

NOTES

- Retention Bends Are On The Outer Two Pins From Both Sides And In The Front Row As Shown In The Front And Side Views
- Solder Tails Should Not Be Skewed By More Than 2 Degrees
- Contact Bends Should Be Uniformed

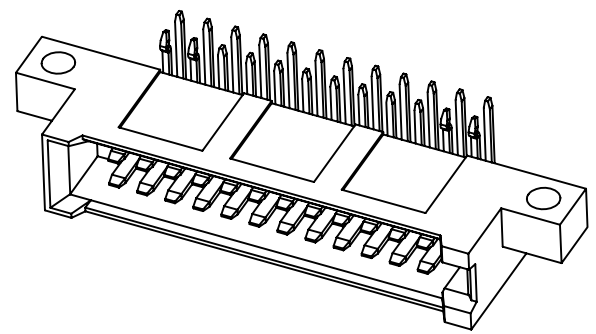

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
18771		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.38					
		LHC		.XX ±0.25					
		DRAWING BY		ANG.					
		ZCH 09/19/2005		UNIT		△ A0	NEW RELEASE	ZCH	09/19/2005
SCALE	NONE	REV.	A0	mm	⊕	NO.REV.	REVISIONS	CHK	DATE