

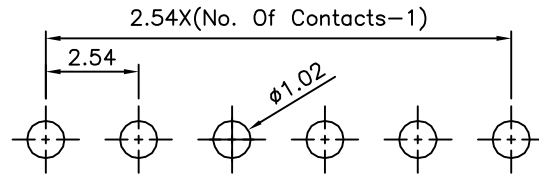
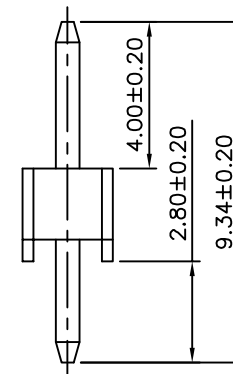


△ SPECIFICATION

Current: 3A
 Withstanding Voltage: 1000V AC RMS
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: -55°C~+105°C
 Housing: PBT(UL94V-0), Black
 Contact: Copper Alloys, Gold Flash Over Nickel
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

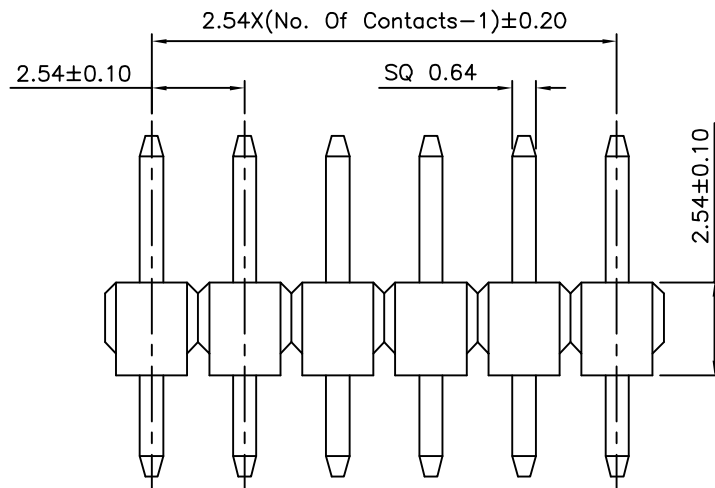

Recommended P.C.B. Layout

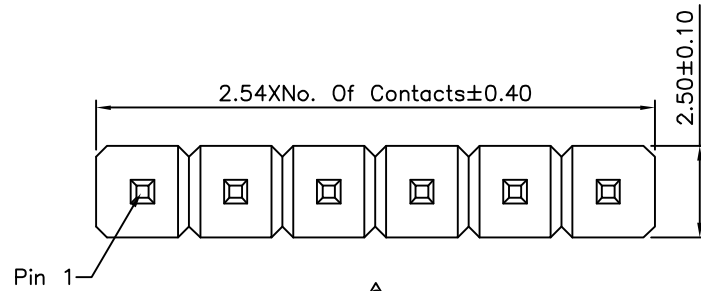

DRAWING No. 18794		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°						
		EMILY								
		CHECKED BY								
		HZF								
DRAWING BY		SONG				△ A2	Modify Data		HZF	12/21/2011
						△ A1	Modify Part No.		INGRID	12/13/2007
						△ A0	NEW RELEASE		SHIN	01/23/2007
SCALE	NONE	REV.	A2	UNIT		NO.	REV.	REVISIONS	CHK	DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.