
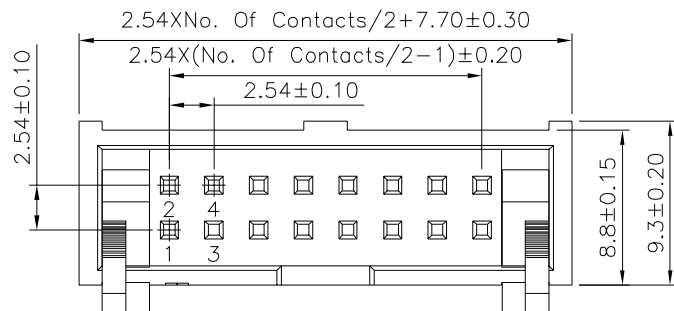
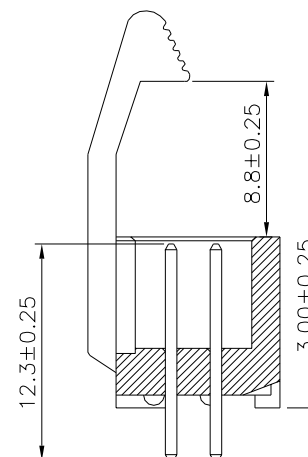


SPECIFICATION

Current Rating:3.0A
Withstand Voltage:AC 1000V Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
Metal Latch:Zinc Alloy,Nickel Plated
No. Of Contact:08,10,14,16,20,26,30,34,40,44,50,60,64
Contacts Are Tooled Already
RoHS Compliant

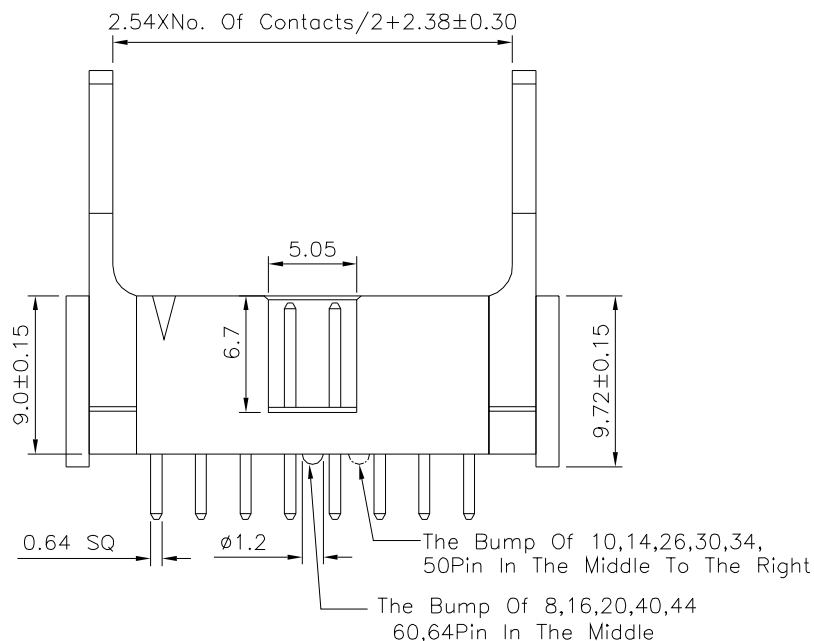

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

19044

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^\circ$
.X	± 0.20	.X*	$\pm 1.5^\circ$
.XX	± 0.15	.XX*	$\pm 1^\circ$
.XXX	± 0.10	.XXX*	$\pm 0.5^\circ$

UNIT	mm
------	----



0	BO
NO.	REV

0	NEW RELEASE
W.	REVIS

HZF
CHK

05/25/2025
DATE