
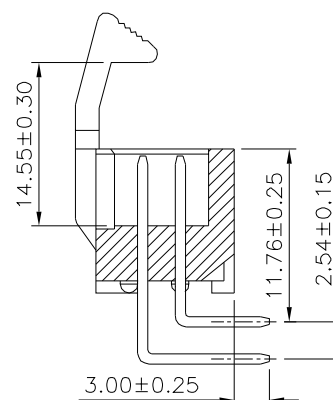
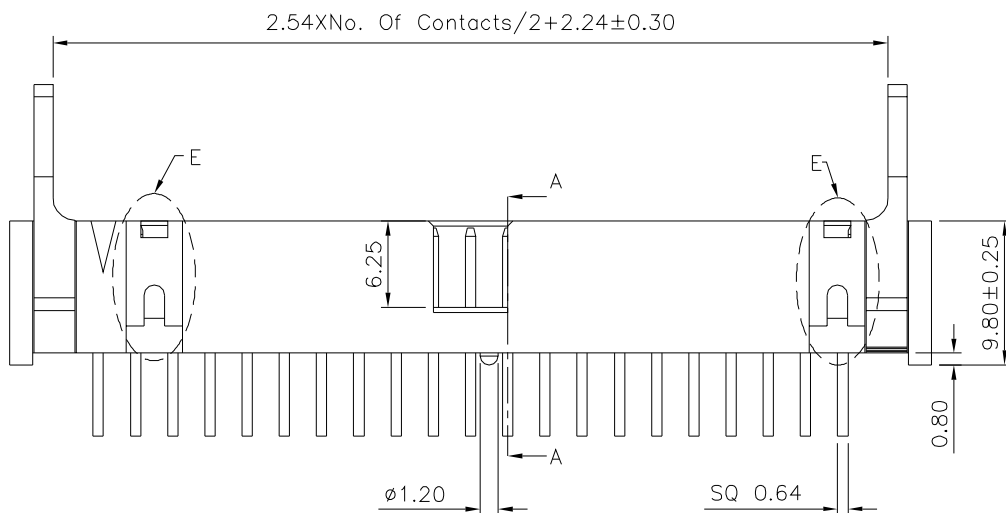


Recommended PCB Layout(Top Side)
(PCB Board Tolerance ± 0.05)

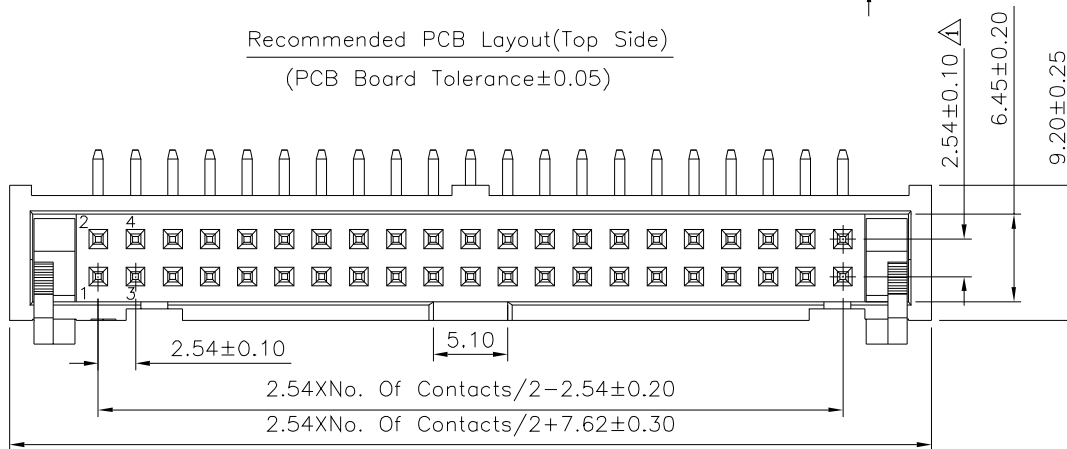

Section A-A

△ SPECIFICATION

Current Rating:3.0 Amp
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1000V AC/DC
Operation Temperature:-40°C~+105°C
Contact:Brass

Gold Flash Over All,Over Nickel

Latch:Zinc Alloy,Nickel Plated

Insulator:PBT+30%G.F.(UL94V-0),Black

△ Above 20 Poles With "E" Profile

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△

19064

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



△ A4

Modify Data

HZF

01/06/2014

△ A3

Modify Data

HZF

05/14/2012

△ A2

Modify Data

HZF

07/28/2009

△ A1

Modify Data

HZF

07/03/2009

△ A0

NEW RELEASE

HZF

11/06/2007

NO. REV.

REVISIONS

CHK

DATE