
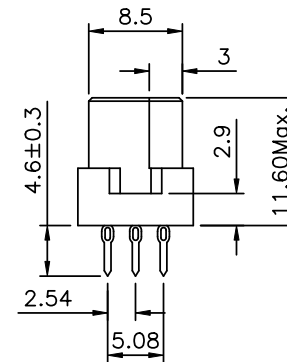
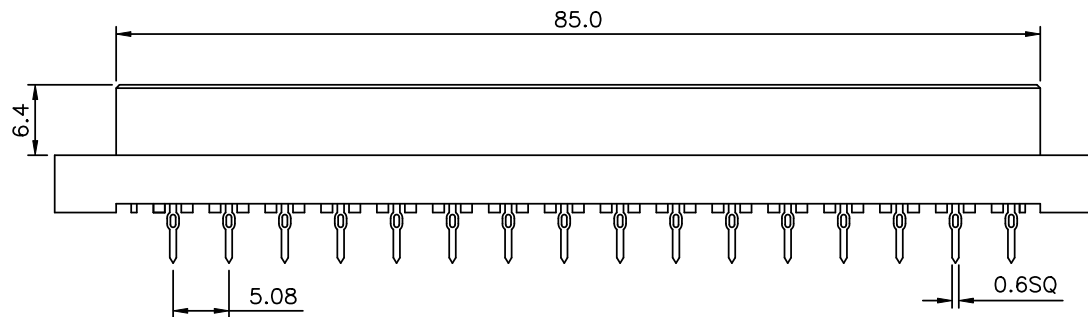
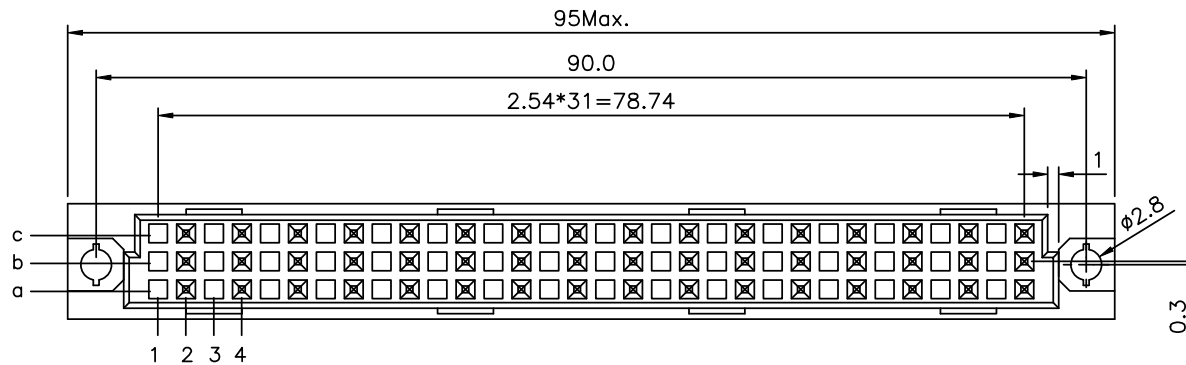


SPECIFICATION

Current Rating: 2Amp
 Dielectric Withstanding Voltage: AC 1000V For 1Minute
 Insulator Resistance: 1000Megohm Min At DC 500V
 Contact Resistance: 30Milliohms Max At DC 100mA
 Operating Temperature: -55°C~+105°C
 Housing: 30% Glass Filled PBT UL94V-0
 Contacts: Phosphor Bronze
 RoHS Compliant

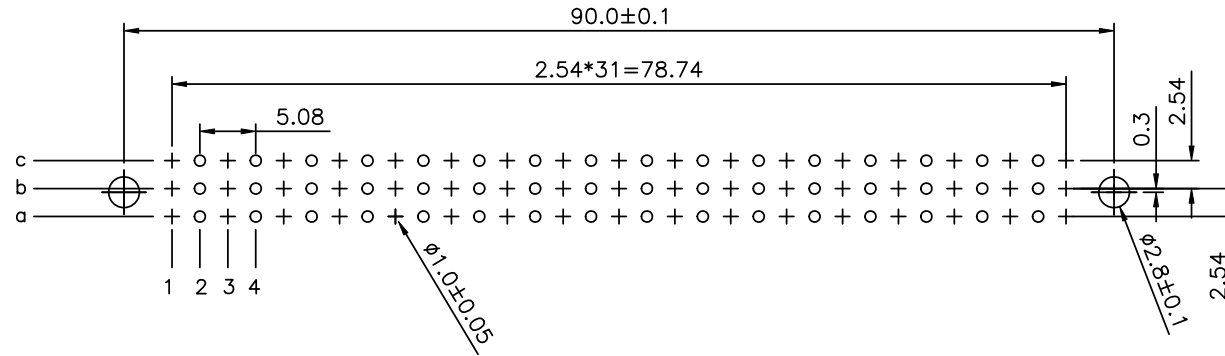

07647		a b c	48
19082		a - c	32
07646		a - -	16
Part No.	Contact Arrange	Rows With Contact	Position

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19082

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE


X. ±0.5

.X ±0.25

.XX ±0.15

UNIT

mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

HZF

11/20/2007

DATE

DATE