
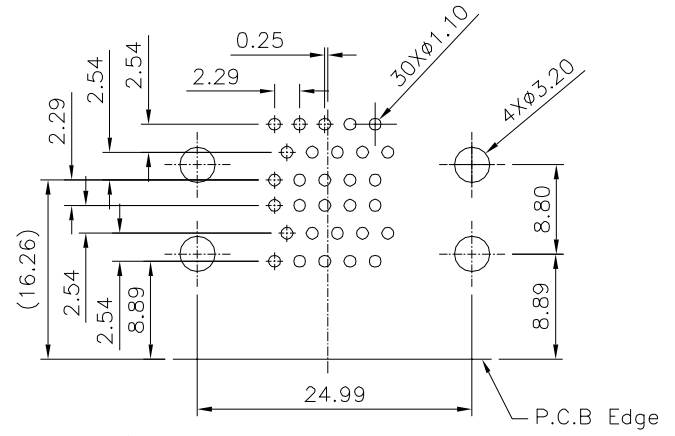


△ SPECIFICATION
 Current Rating:1Amps
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-40°C~+85°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,Tin Plated
 On Solder Tails,Over Nickel.
 Grounding Bracket:Zinc Alloy,Nickel Plated
 Shell:Steel,Nickel Plated
 RoHS Compliant

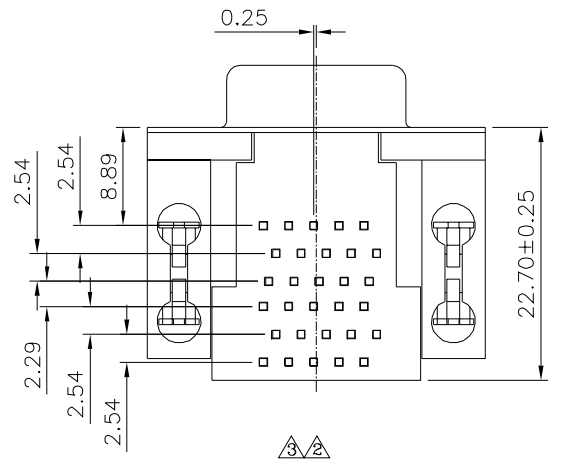

△ Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 1		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X* ±3* .XX ±0.25 .XX* ±1* .XXX ±0.05 .XXX* ±0.5*				
19188		CHECKED BY HZF			△ A3	Modify Data	HZF	02/28/2023
SCALE NONE		DRAWING BY PEGA			△ A2	Modify Data	HZF	02/10/2023
REV.	A3	UNIT mm		△ A1	Modify Data	HZF	02/20/2009	
				△ A0	NEW RELEASE	HZF	04/23/2008	
				NO. REV.	REVISIONS	CHK	DATE	