



△ SPECIFICATION


Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature: -40°C~+85°C
 Relative Humidity: 70% ±10%RH
 Insulation Resistance:500 Megaohms Min. Initial
 At 500V DC
 Contact Resistance:20 Milliohms Max. Initial
 30 Milliohms Max. Final
 Durability:750 Cycles
 Dielectric Withstanding Voltage:
 1000V RMS. At 60Hz,1 Minute Between
 Adjacent Contacts
 1500V RMS. At 60Hz,1 Minute Between
 Shield And Contacts
 Housing:PBT+G.F.(UL94V-0),Black
 Insert Housing:PBT+G.F.(UL94V-0),Black
 Contacts:Phosphor Bronze
 Shell:Brass,Nickel Plated
 Cavity Conforms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

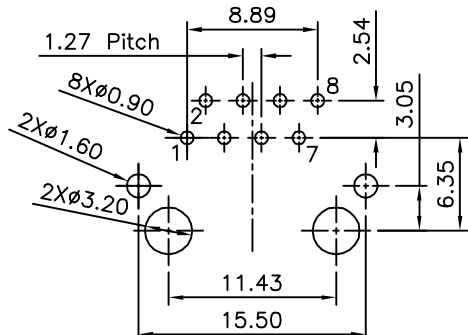

Recommended P.C.B. Layout (Top View)
 Recommended P.C.B. Thickness:1.6mm
 Tolerance:±0.05

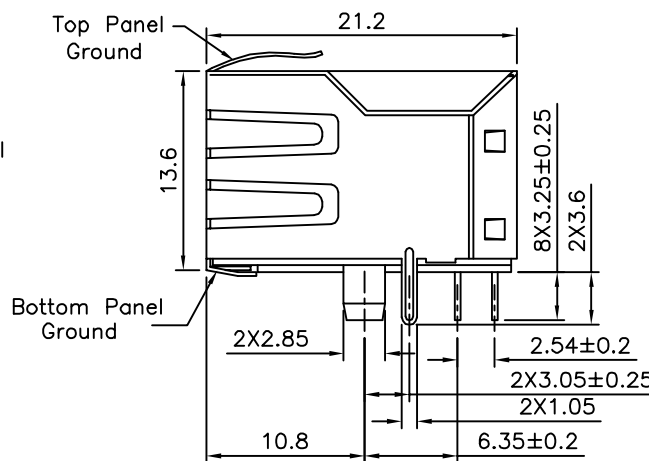

△ Detail X

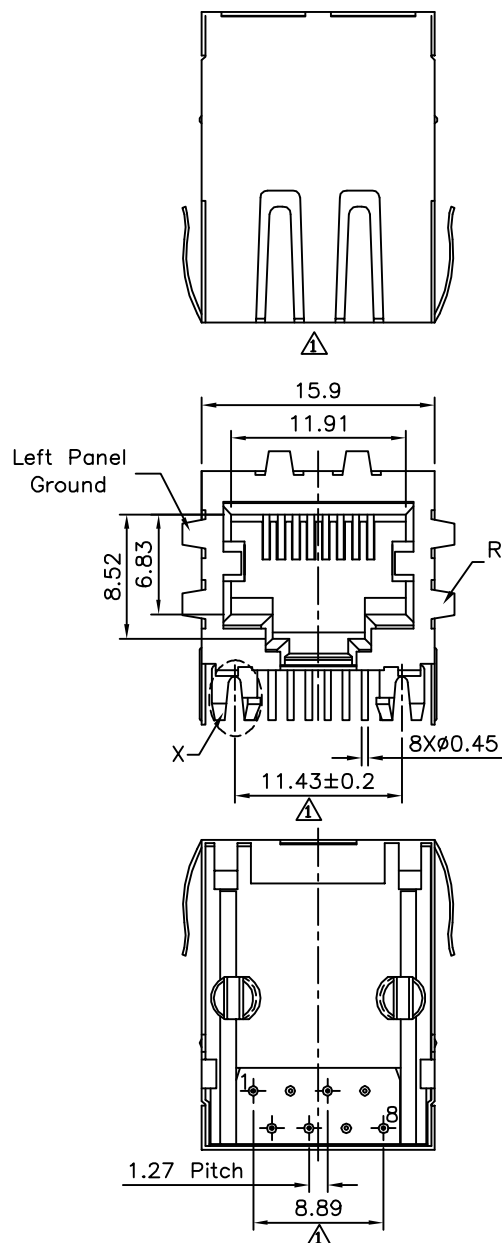

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19190

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05

UNIT
 mm



△ B1

Modify Data

HZF

05/27/2016

△ B0

NEW RELEASE

BECKY

03/01/2006

NO.REV.

REVISIONS

CHK

DATE