



△ SPECIFICATION



Current: 3A
 Withstanding Voltage: 1000V AC RMS
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -55°C~+105°C
 Housing: PBT(UL94V-0),Black
 Contact: Copper Alloys,Gold Plated
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

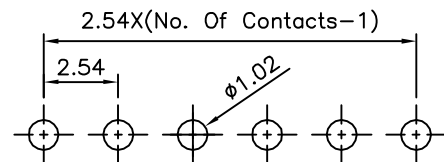

Recommended P.C.B. Layout

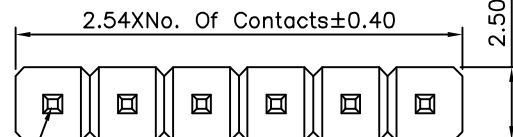

Pin 1

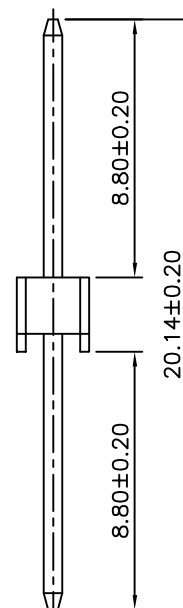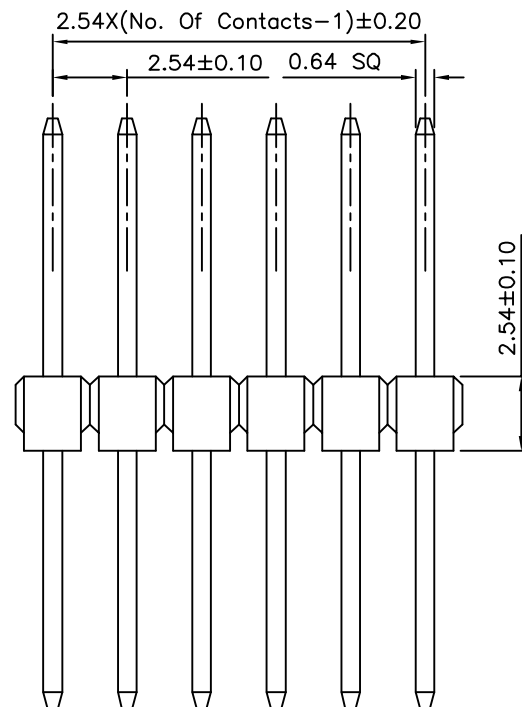

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19199

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	08/08/2011
△ A0		NEW RELEASE	HZF	02/05/2008