


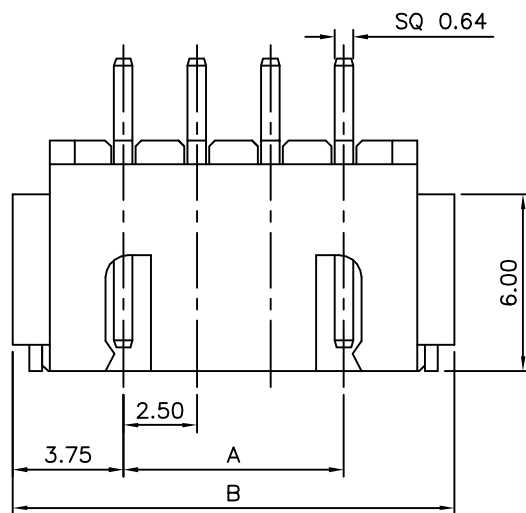




3P~16P

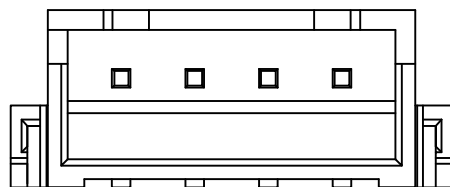

2P

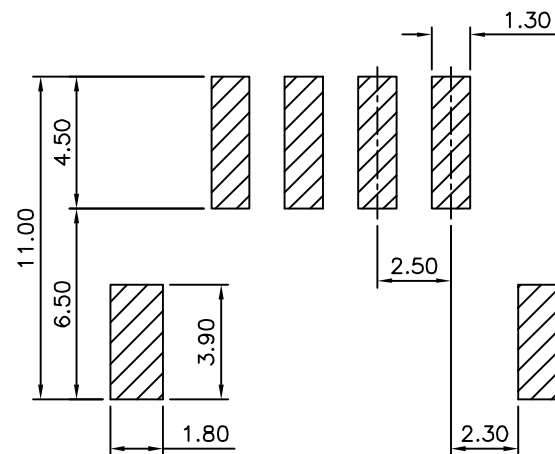

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC Max.
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Withstanding Voltage:1000V AC/Minute
Operation Temperature:-25°C~+85°C
⚠ Pin:Brass,Gold Flash Over Nickel
Insulator:PA6T,UL94V-0
Solder Tab:Brass,Tin Plated
RoHS Compliant

⚠	Pin	A	B
*	2	2.5	10.0
*	3	5.0	12.5
*	4	7.5	15.0
*	5	10.0	17.5
*	6	12.5	20.0
*	7	15.0	22.5
*	8	17.5	25.0
*	9	20.0	27.5
*	10	22.5	30.0
*	11	25.0	32.5
	12	27.5	35.0
	13	30.0	37.5
	14	32.5	40.0
	15	35.0	42.5
	16	37.5	45.0

The Mark Of "*" Are Toolled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19272

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.25
ANG.

UNIT
mm




⚠ A1
⚠ A0
NO. REV.

Modify Data
NEW RELEASE
REVISIONS

HZF
HZF
CHK

02/18/2013
10/11/2010
DATE

SPECIFICATION
Q'ty:500 PCS/Reel
RoHS Compliant

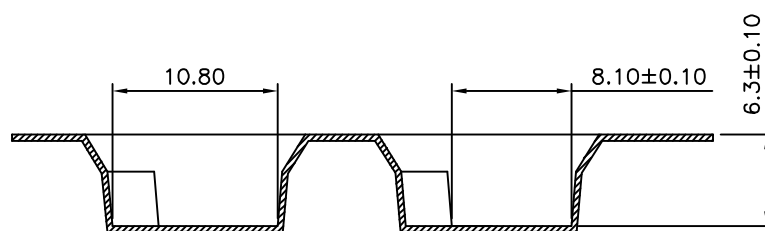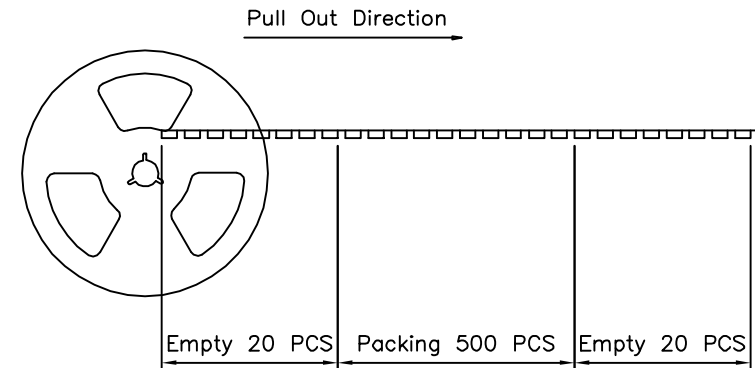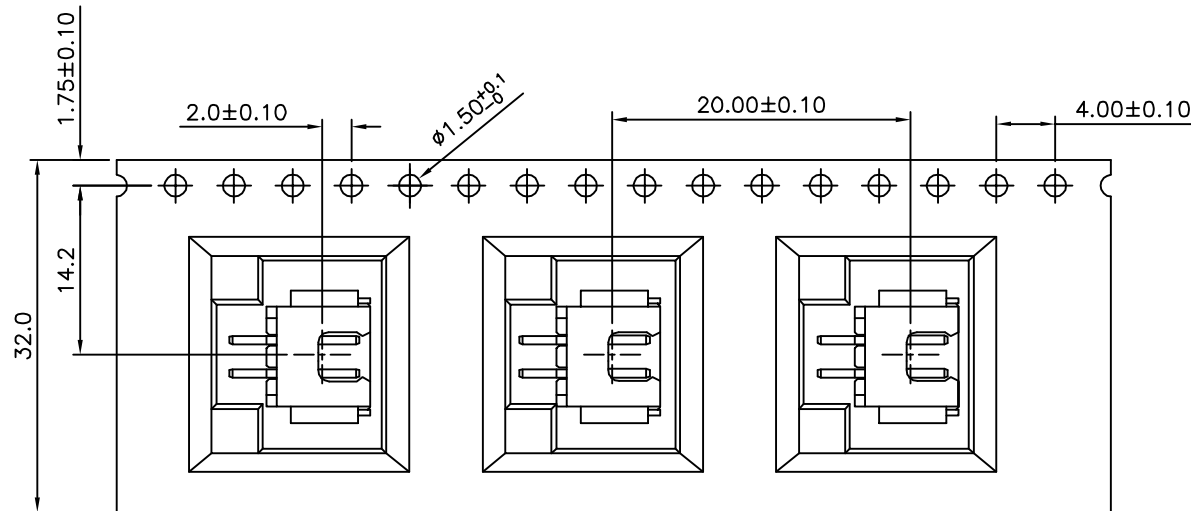

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19272

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15


SCALE

NONE

REV.

A1

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A1 Modify Data

A0 NEW RELEASE

HZF

02/18/2013

10/11/2010