
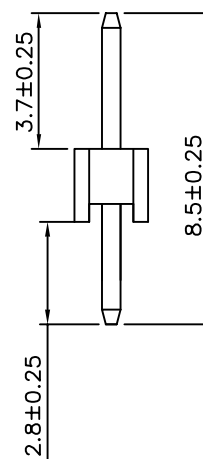
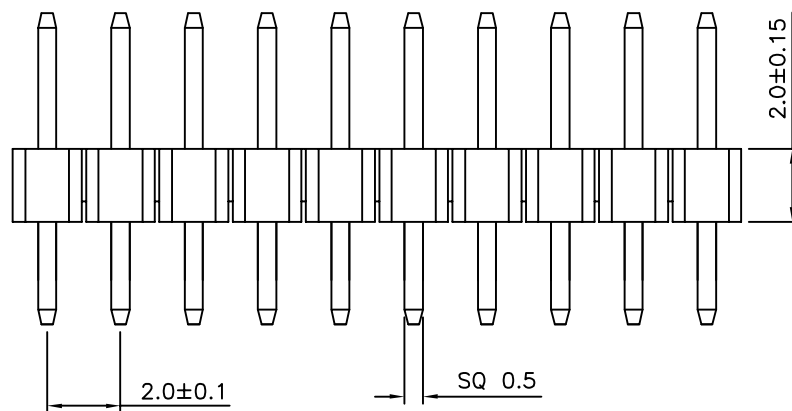
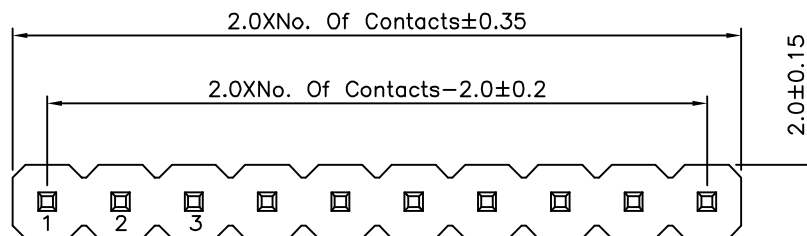


SPECIFICATION

Current Rating:1.5 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

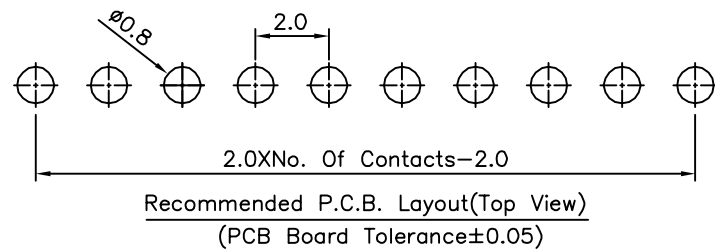

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19368

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^*$
.X ± 0.20 .X* $\pm 1.5^*$
.XX ± 0.15 .XX* $\pm 1^*$
.XXX ± 0.10 .XXX* $\pm 0.5^*$

SCALE

NONE

REV.

A0

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

11/08/2014