
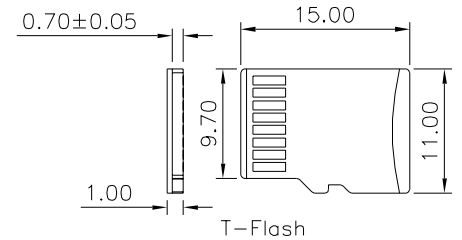
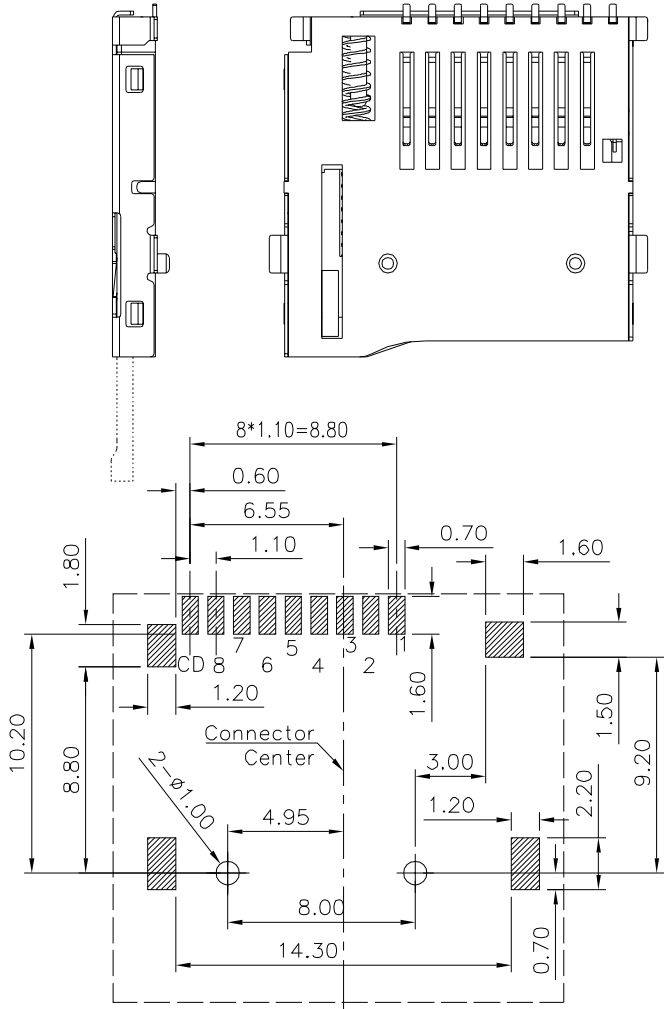


SPECIFICATION

- 1. Material & Finish**
 Insulator: LCP(UL94V-0), Black
 Contact: Phosphor Bronze, Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
 Shell: Stainless Steel, Nickel Plated
 Spring: Steel
- 2. Electrical Characteristics**
 Current Rating: 0.5A
 Contact Resistance: 100 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 500V AC
- 3. Mechanical Characteristics**
 Durability: 5000 Cycles
- 4. Environmental Characteristics**
 Operation Temperature: -25°C ~ +85°C
- 5. RoHS Compliant**

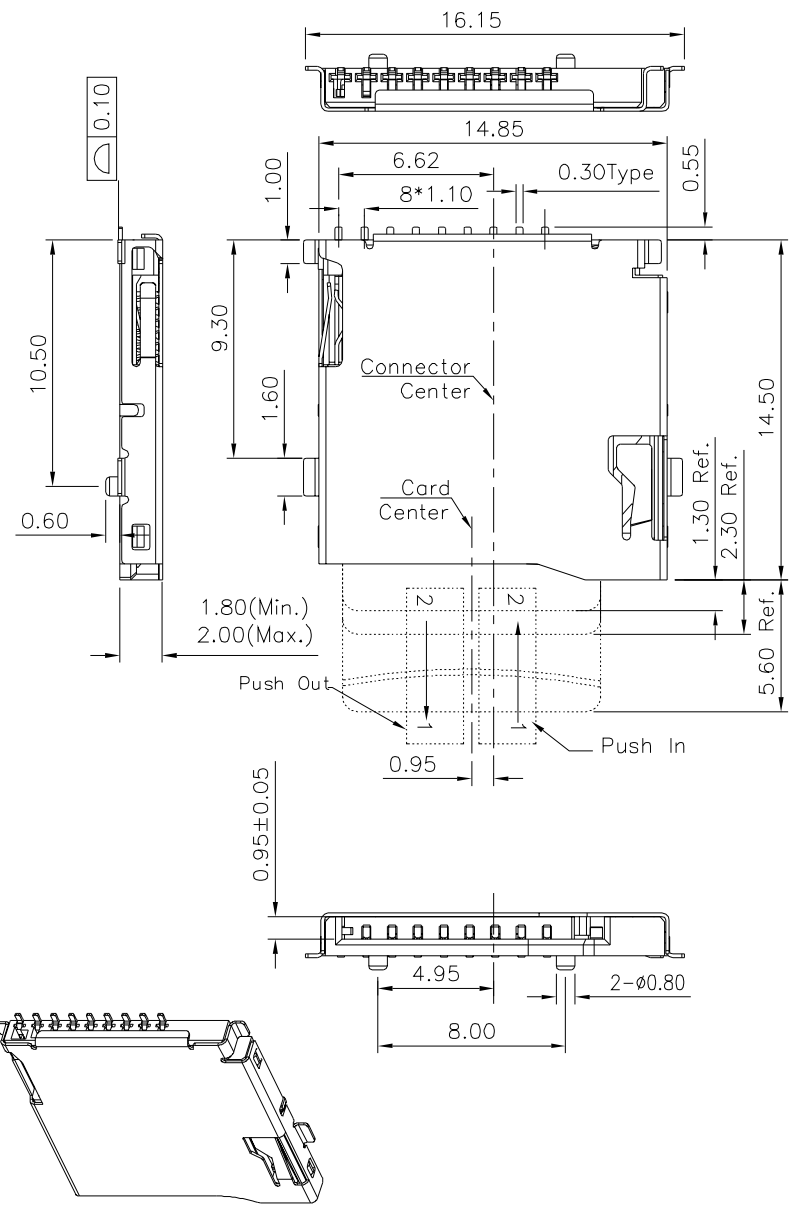

Pin No.	Name	Type	Description
1	DAT2	I/O/PP	Date Line(BIT2)
2	CD/DAT3	I/O/PP	Catrd Detect Date Line(BIT3)
3	CMD	PP	Command Response
4	VDD	S	Supply Voltage
5	CLX	I	Clock
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Date Line(BIT0)
8	DAT1	I/O/PP	Date Line(BIT1)

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.25 .XXX ±0.15 ANG. ±2°
19512		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	06/17/2021
△A0		NEW RELEASE	HZF	05/19/2020