

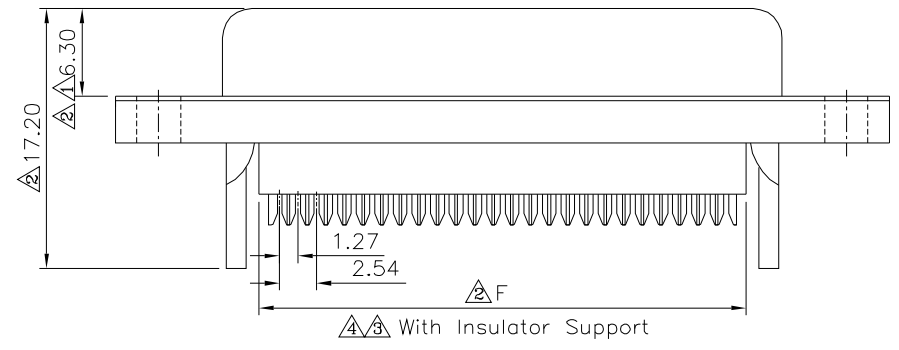


**△△△ SPECIFICATIONS**

Current Rating:3 Amp  
 Voltage Rating:250V AC/RMS 60Hz  
 Contact Resistance:20 Milliohms Max. At 1AMP DC  
 Insulation Resistance:1000 Megohms At 500V DC  
 Dielectric Withstanding Voltage:1000V AC/RMS 60Hz  
 For 1 Minute  
 Insulator:PBT+G.F.(UL94V-0),Black  
 Contact:Brass  
 Gold Flash On Contact Area,  
 Tin Plated On Solder Tails,Over Nickel  
 RoHS Compliant

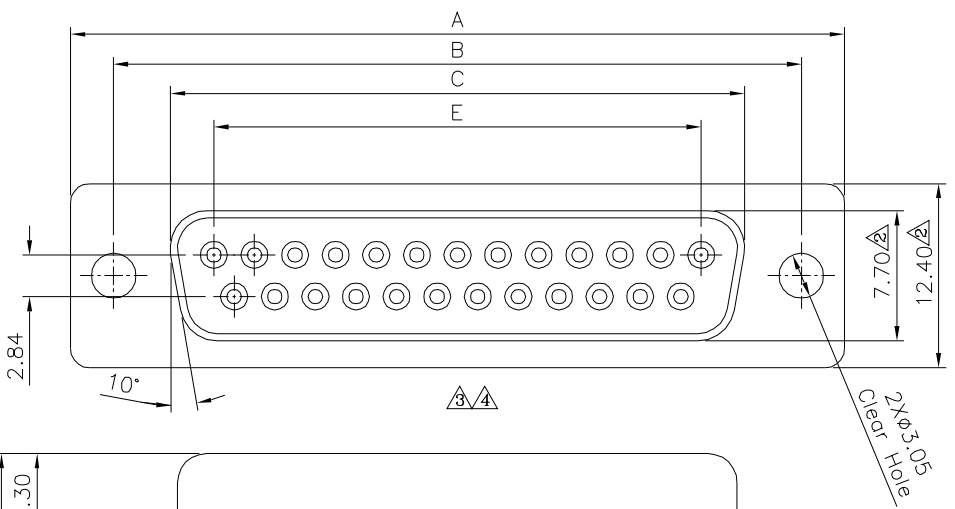

△△△ Pin	A	B	C	E	F
09	30.50	25.00	16.00	11.08	10.16
15	39.00	33.32	24.27	19.39	17.78
25	53.08	47.04	38.22	33.24	30.48
37	69.40	63.50	54.65	49.86	52.06

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		△ A4	Modify Data	HZF	04/20/2015
19594		MEI		X. ±0.38 X.* ±3°		△ A3	Modify Data	HZF	12/02/2014
		CHECKED BY		.X ±0.25 .X* ±1.0°		△ A2	Modify Data	HZF	12/11/2008
		DRAWING BY		.XX ±0.13		△ A1	Modify Data	HZF	02/20/2008
SCALE	NONE	REV.	A4	UNIT	mm	△ A0	NEW RELEASE	MEI	06/21/2000
				NO. REV.		REVISIONS		CHK	DATE