

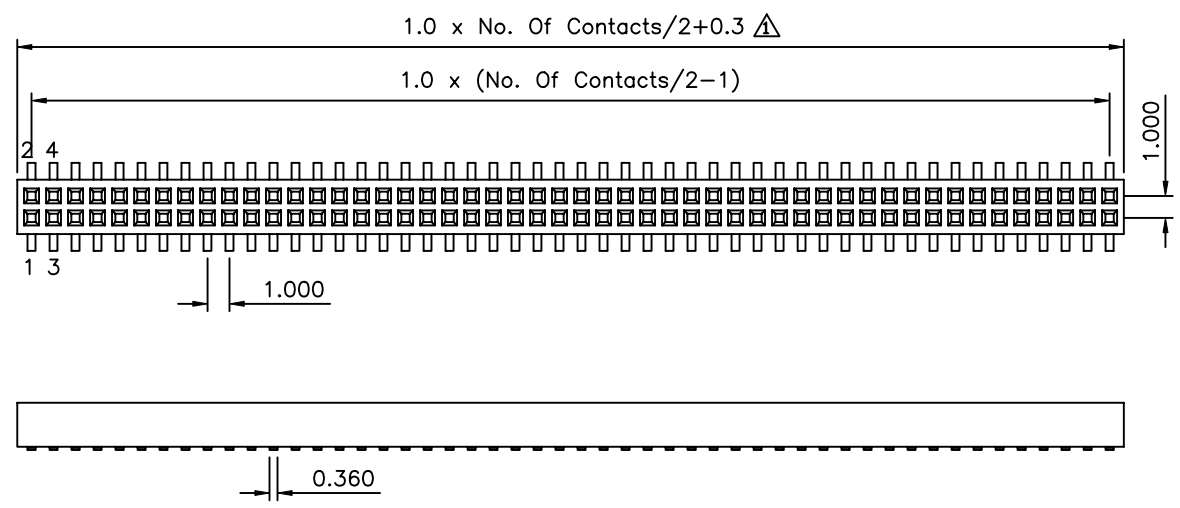


**△ SPECIFICATION**  
 Current Rating:1A  
 Insulation Resistance:5000 Megohms Min.  
 Dielectric Withstanding:500V AC  
 Operation Temperature:-40°C~+105°C  
 Max. Processing Temp.:230°C For 30~60 Seconds  
 (260°C For 10 Seconds)  
 Contact:Phosphor Bronze,Gold Flash  
 Housing:LCP UL94V-0,Black  
 RoHS Compliant

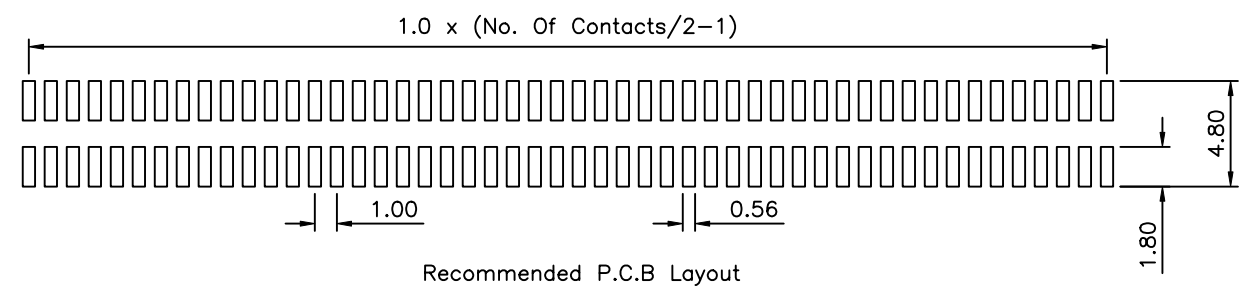

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05
19687		MEI		
		CHECKED BY HZF		
		DRAWING BY LXX		UNIT mm
SCALE	NONE	REV.	A1	

△ A1	Modify Data	HZF	12/29/2009
△ A0	NEW RELEASE	HZF	12/06/2007
NO. REV.	REVISIONS	CHK	DATE