


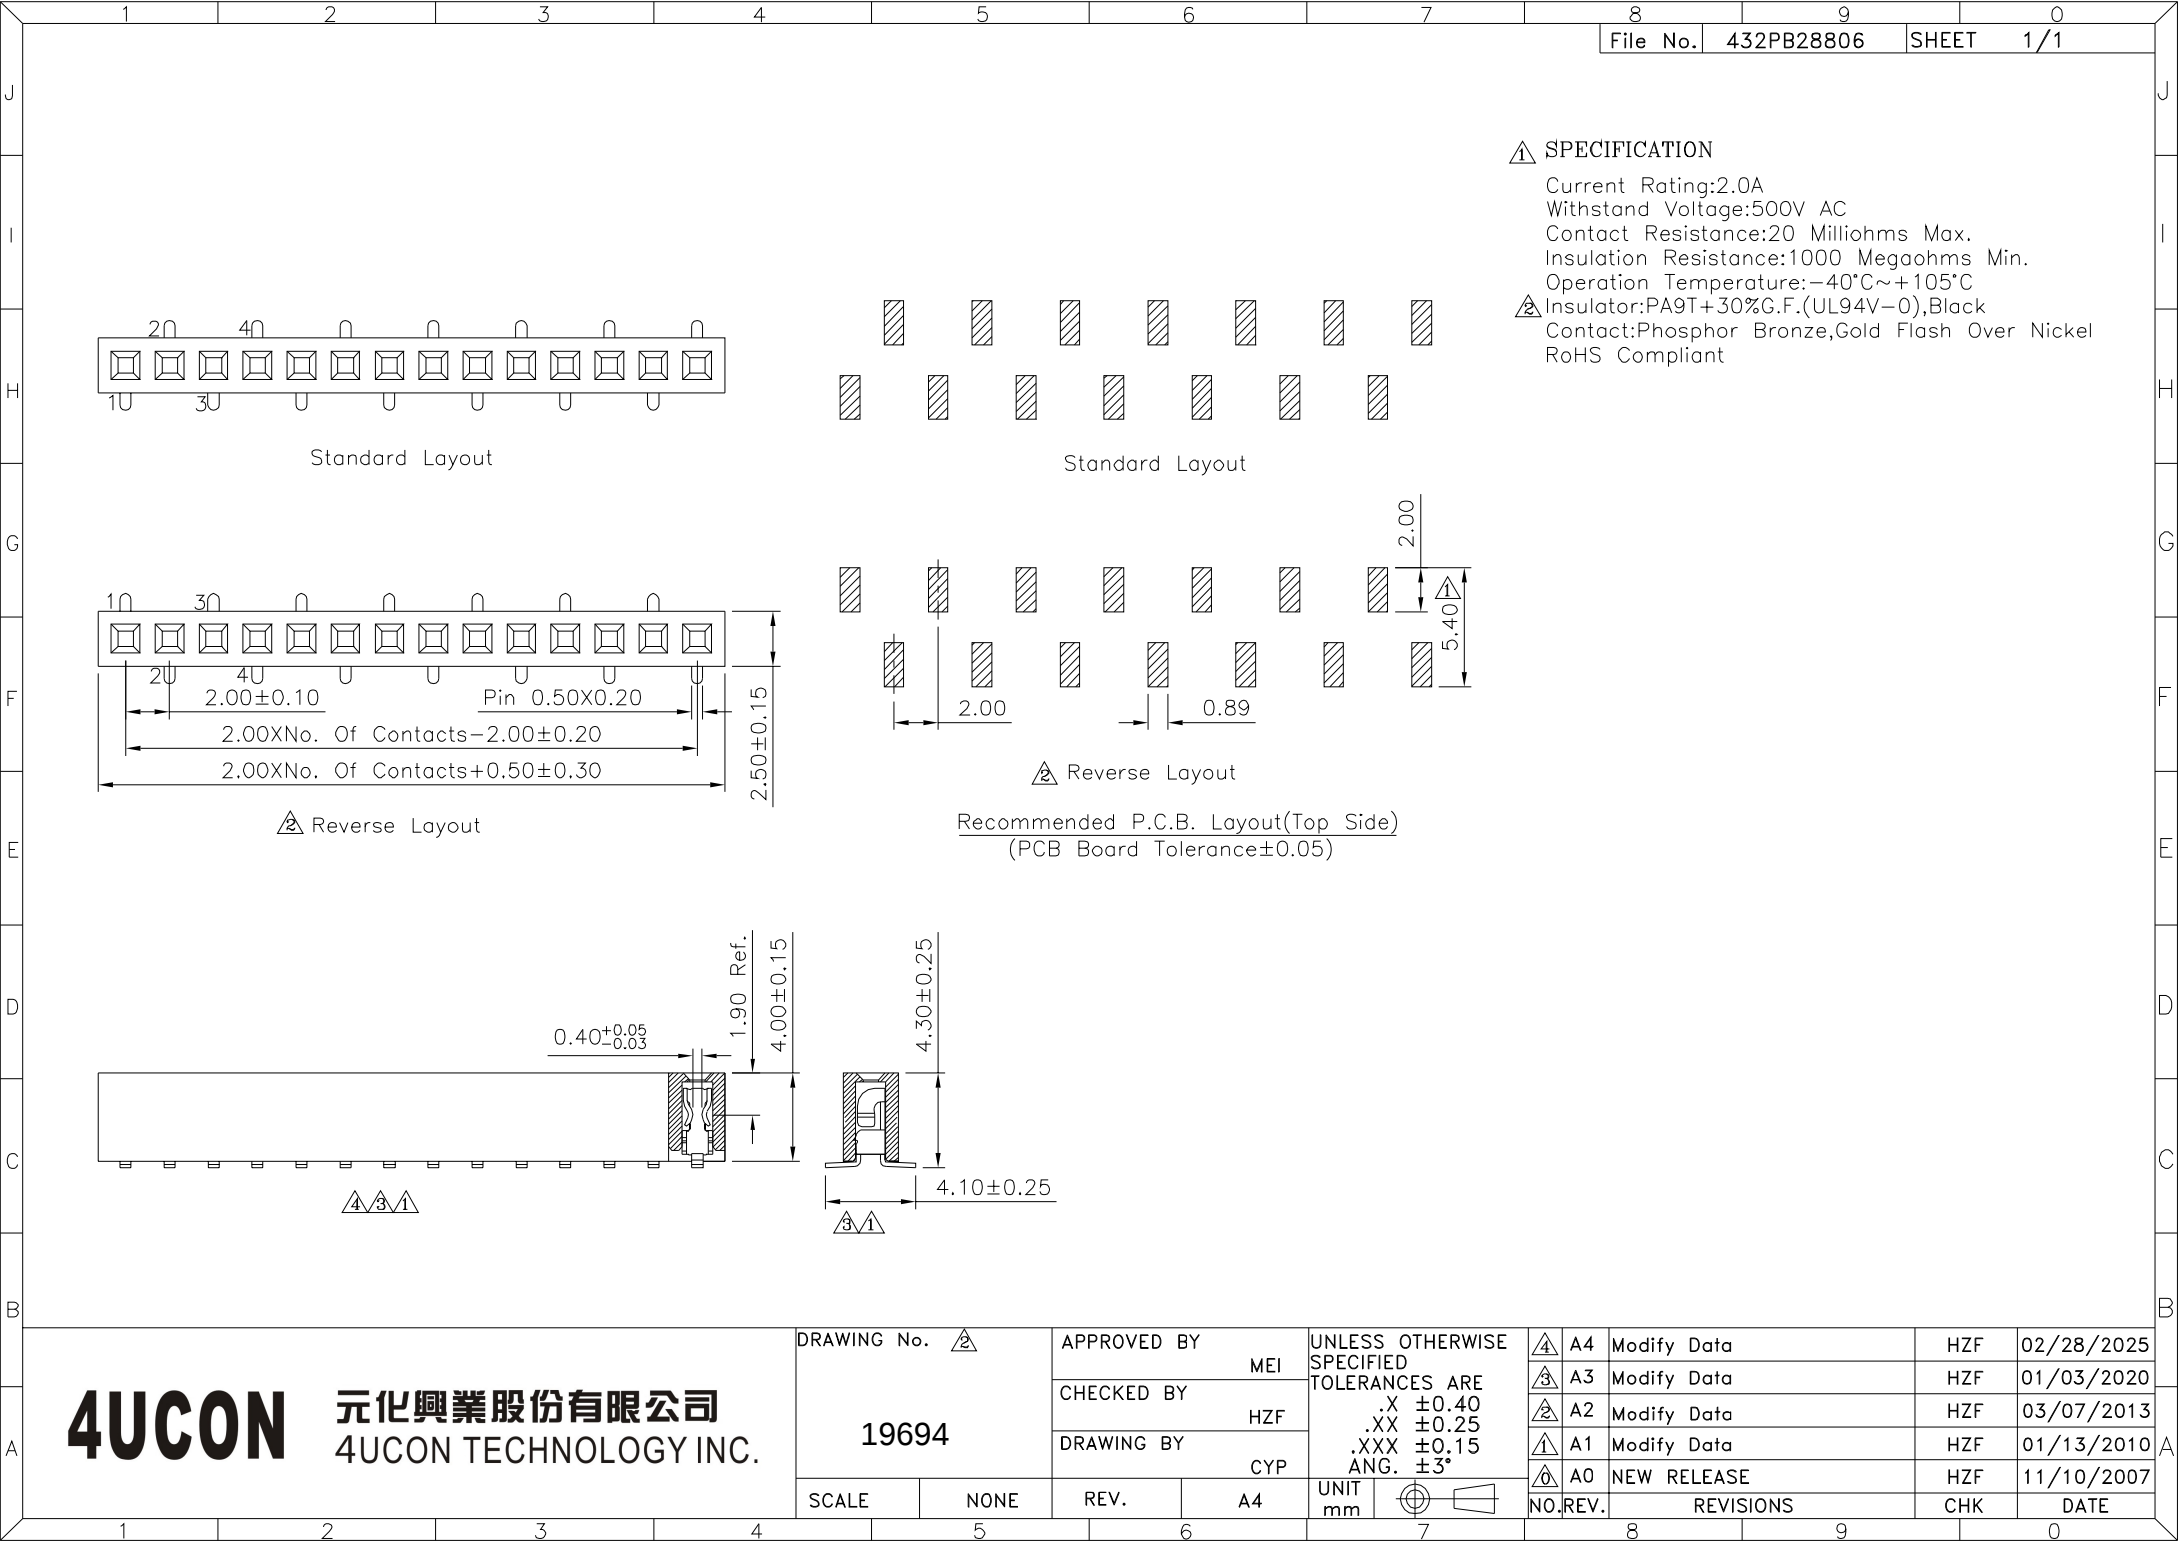

△ SPECIFICATION

Current Rating:2.0A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

△ Reverse Layout
Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. △

19694

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



△ A4	Modify Data	HZF	02/28/2025
△ A3	Modify Data	HZF	01/03/2020
△ A2	Modify Data	HZF	03/07/2013
△ A1	Modify Data	HZF	01/13/2010
△ A0	NEW RELEASE	HZF	11/10/2007
NO. REV.	REVISIONS	CHK	DATE