

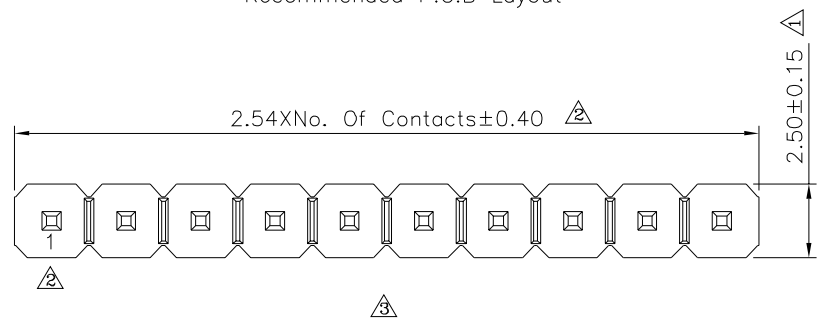


Recommended P.C.B Layout

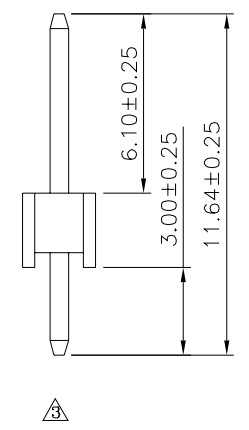

△△△ SPECIFICATION
 Current:3A
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

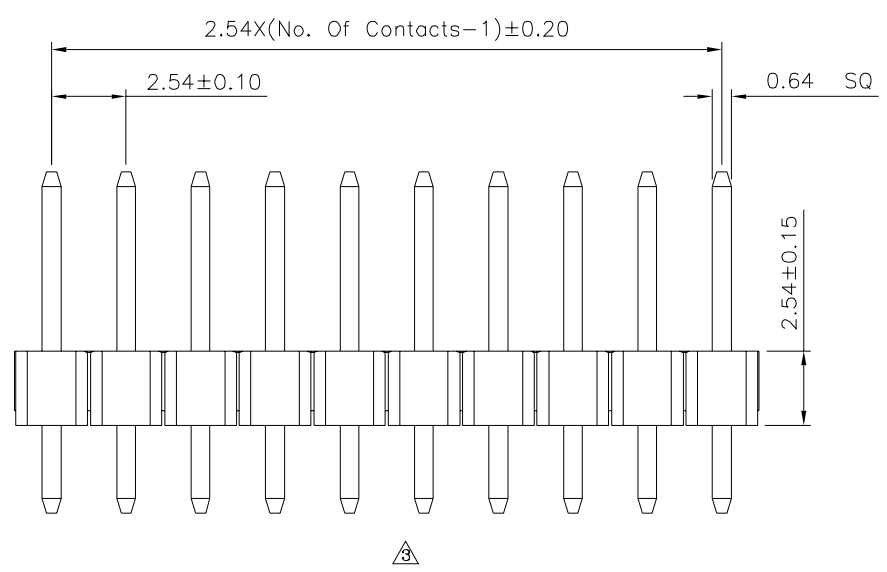

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 △ .XX ±0.25 .XXX ±0.05
19739		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		WSS		
SCALE	NONE	REV.	A3	

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	03/19/2025
△2	A2	Modify Data	HZF	02/21/2011
△1	A1	Modify Data	HZF	02/02/2009
△0	A0	NEW RELEASE	SHIN	01/24/2007