


△△△ SPECIFICATION

Current Rating:1A
 Voltage Rating:100V AC
 Contact Resistance: 50 Milliohms Max.
 At 20mV Max. 50mA
 Insulation Resistance:100 Megaohms Min.
 At 500V DC For 1 Minute
 Withstanding Voltage:500V AC/Minute
 Operation Temperature:-30°C~+50°C
 Storage Temperature:-30°C~+85°C
 Body:LCP,Black
 Hood:LCP,Black
 Shell:SUS201,Nickel Plated
 Latch:SUS201
 △ Contact:H65
 Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

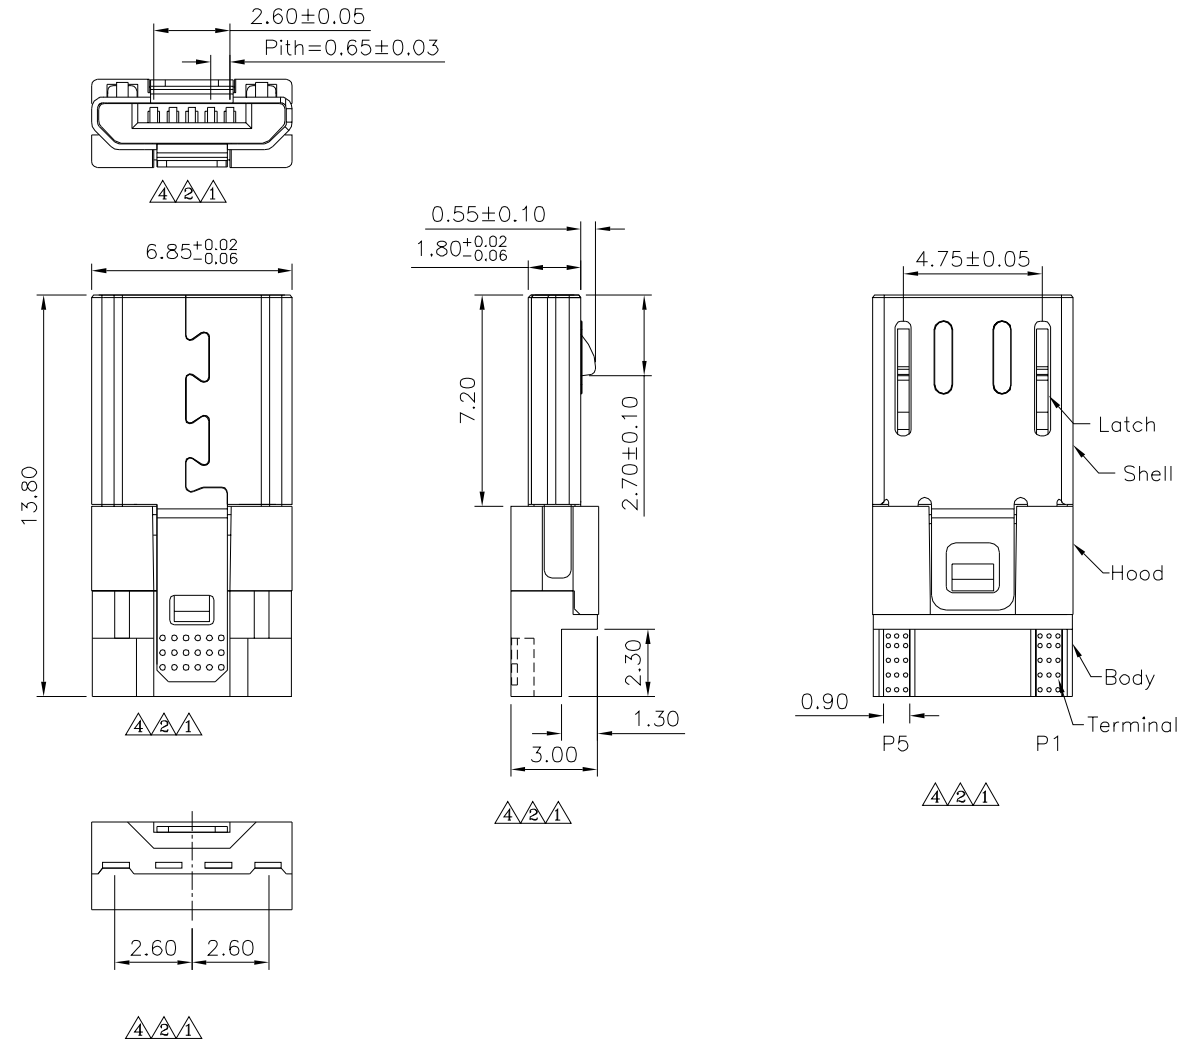

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. \triangle		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\triangle X \pm 0.35$ $X^* \pm 5.0^*$ $.X \pm 0.25$ $.X^* \pm 4.0^*$ $.XX \pm 0.20$ $.XX^* \pm 3.0^*$ $.XXX \pm 0.15$ $.XXX^* \pm 2.0^*$	
19870		MEI			
		CHECKED BY	HZF		
		DRAWING BY	CYP		
SCALE	NONE	REV.	A4	UNIT	mm

\triangle	A4	Modify Data	HZF	11/14/2019
\triangle	A3	Modify Data	HZF	11/05/2019
\triangle	A2	Modify Data	HZF	06/12/2019
\triangle	A1	Modify Data	HZF	05/28/2018
\triangle	A0	NEW RELEASE	HZF	10/25/2015
NO.	REV.	REVISIONS	CHK	DATE