


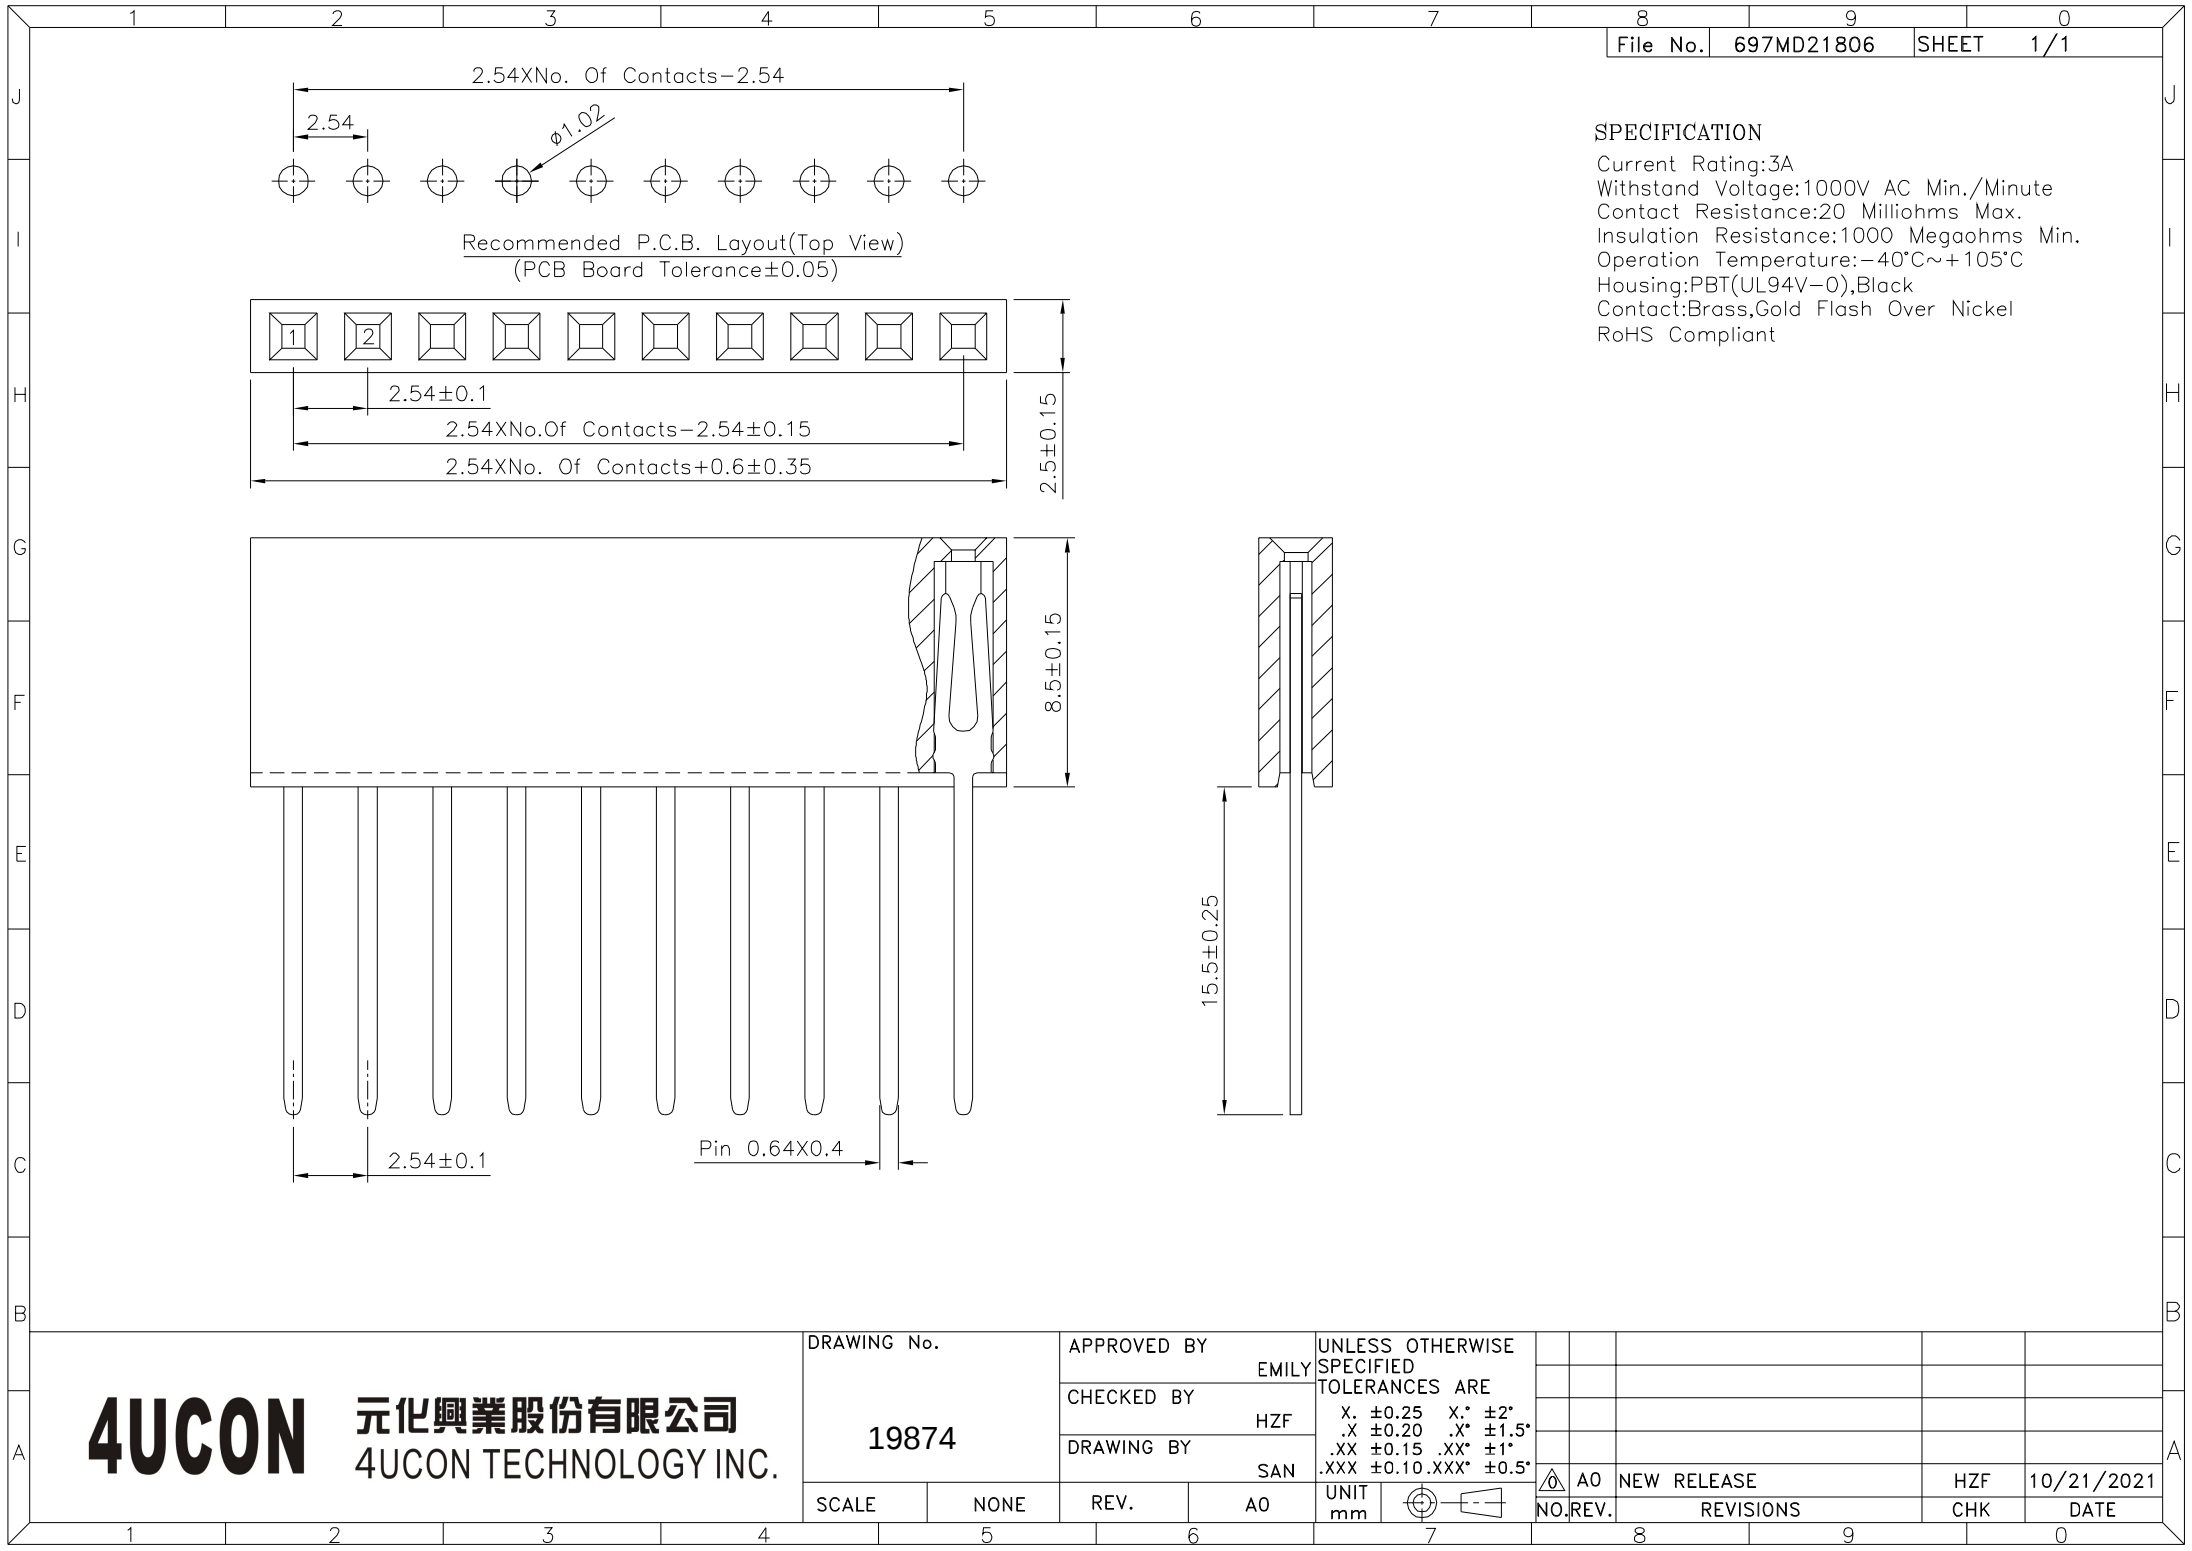

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 19874		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*						
		EMILY								
		CHECKED BY								
		HZF								
DRAWING BY		SAN								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE	HZF	10/21/2021
				NO. REV.		REVISIONS		CHK	DATE	