
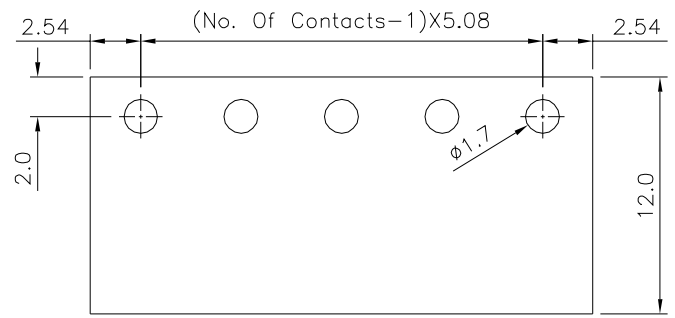


△ SPECIFICATION  
 Voltage Rating: 300V AC  
 Current Rating: 16A  
 Withstanding Voltage: AC 2500V (1 Minute)  
 Using Temperature Range: -40°C ~ +105°C  
 Soldering Temperature: +250°, 5 Seconds Max.  
 Solder Pin: Copper Alloy, Tin Plated  
 △ Insulator Body (Housing): Polyamide + G.F. (UL94V-0), Green  
 RoHS Compliant  
 \* 02~24P Available

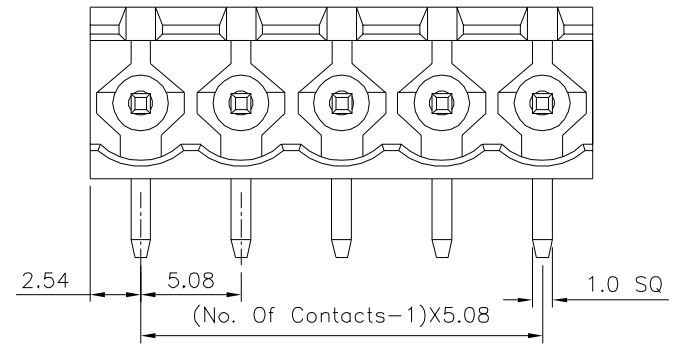

Recommended P.C.B. Layout

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 3/2/1  
 19883

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY HTP  
 REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°  
 UNIT mm

|     |      |             |     |            |
|-----|------|-------------|-----|------------|
| ③   | A3   | Modify Data | HZF | 11/04/2019 |
| ②   | A2   | Modify Data | HZF | 08/08/2014 |
| ①   | A1   | Modify Data | HZF | 02/17/2012 |
| ④   | A0   | NEW RELEASE | HZF | 04/10/2009 |
| NO. | REV. | REVISIONS   | CHK | DATE       |